


SUPERNOVA 1260 / RACK BRACKET R2

10U = 444.50 mm | 304 stainless | 2.00 +/-0.10 mm | Four rack fixing positions per U

FRONT / 1:2 - dashed U boundaries are drawing references only

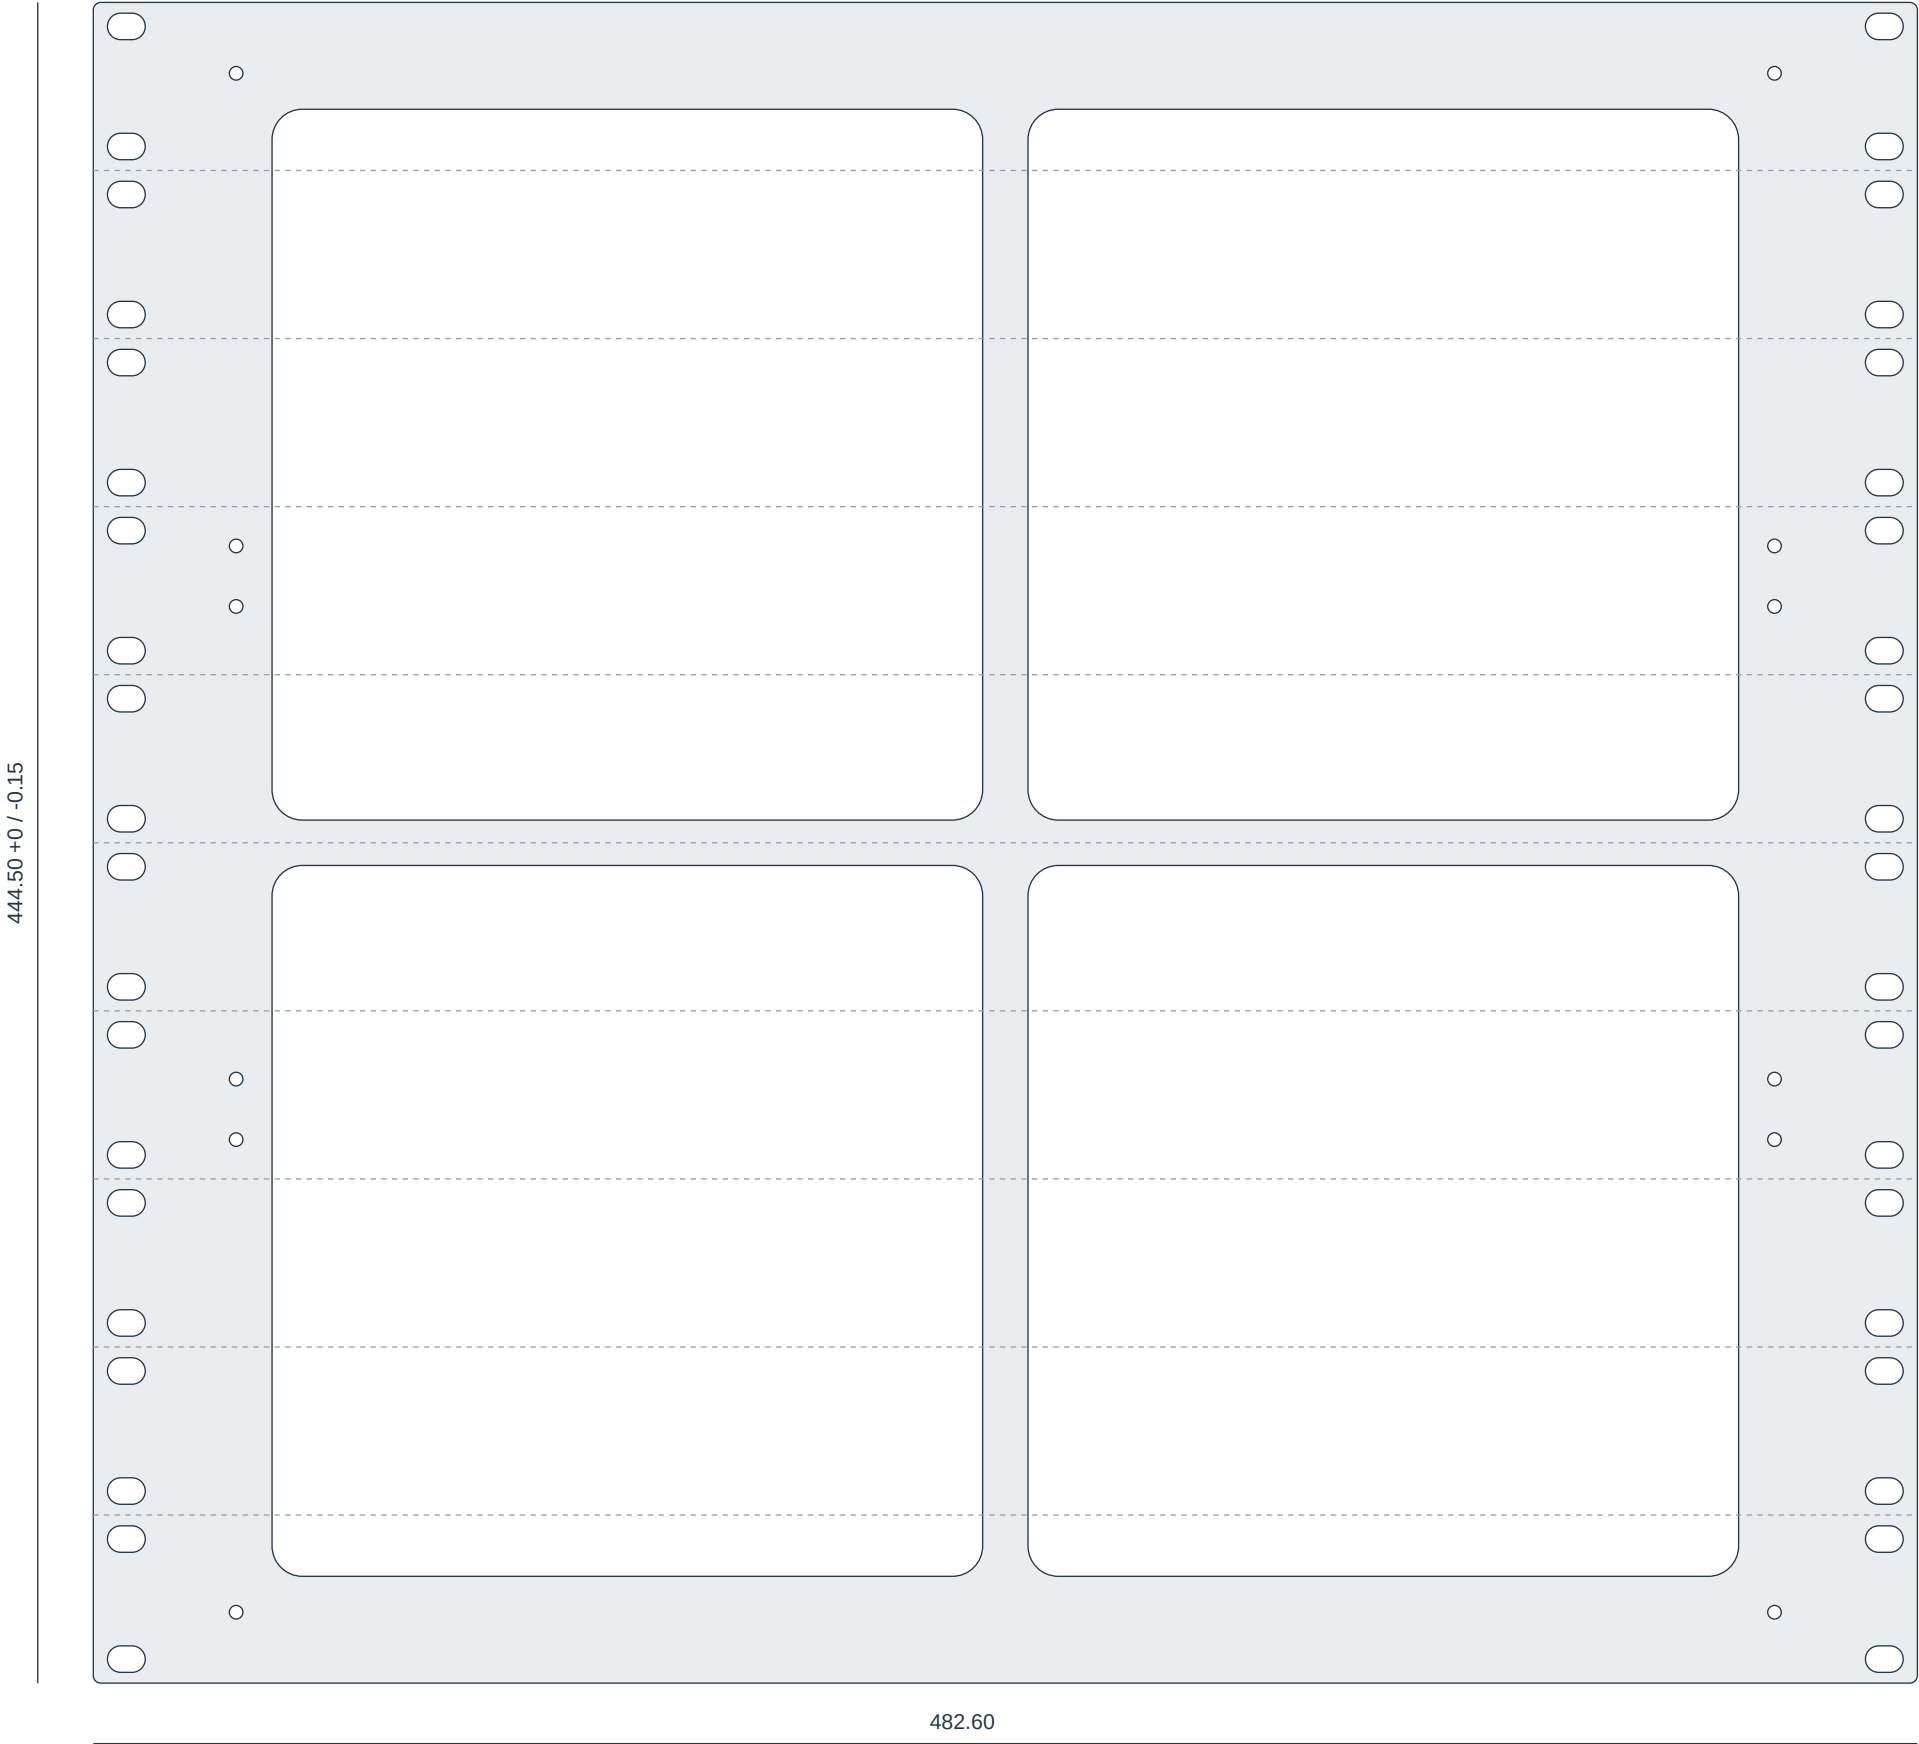

RACK FIXINGS / 40 POSITIONS

10 x 7 slots, R3.5 ends, THROUGH.

X = -232.55 and +232.55.

Y = 44.45 n + 6.35 / 38.10; n = 0...9.

U	Lower Y	Upper Y
1	6.350	38.100
2	50.800	82.550
3	95.250	127.000
4	139.700	171.450
5	184.150	215.900
6	228.600	260.350
7	273.050	304.800
8	317.500	349.250
9	361.950	393.700
10	406.400	438.150

RADIATOR FIXINGS / 12 HOLES

Diameter 3.60 THROUGH; X = +/-203.50.

Y = 18.75, 143.75, 159.75,
284.75, 300.75, 425.75.

CUT PROFILE AND FINISH

4x 188-square apertures, corner R8.

Centres X +/-100; Y122.25 / 322.25.

12 mm central webs; outer corners R2.

No countersinks, no tapped holes.

Coordinates/profile +/-0.15 unless stated.

Hole and slot widths +0.15 / 0.

Deburr 0.2-0.3; flatness target 0.5 overall.

Satin finish; no surface markings.

ASSEMBLY NOTES

Origin: X midplane, Y bottom, Z rear face.

Use suitable rack hardware; outer rows need

head/washer OD <=12 to stay within height.

Full 10U outline has no nominal panel gap.

Radiator retention remains M3: recheck reach

with the thinner plate and actual washers.

Mass 1.120 kg; fittings/hoses outside envelope.

40 available holes do not require 40 screws.