


RM10 / REVISION P

FACEPLATE / 304 stainless steel / 2.00 +/-0.10 thick / no countersinks, no tapped holes

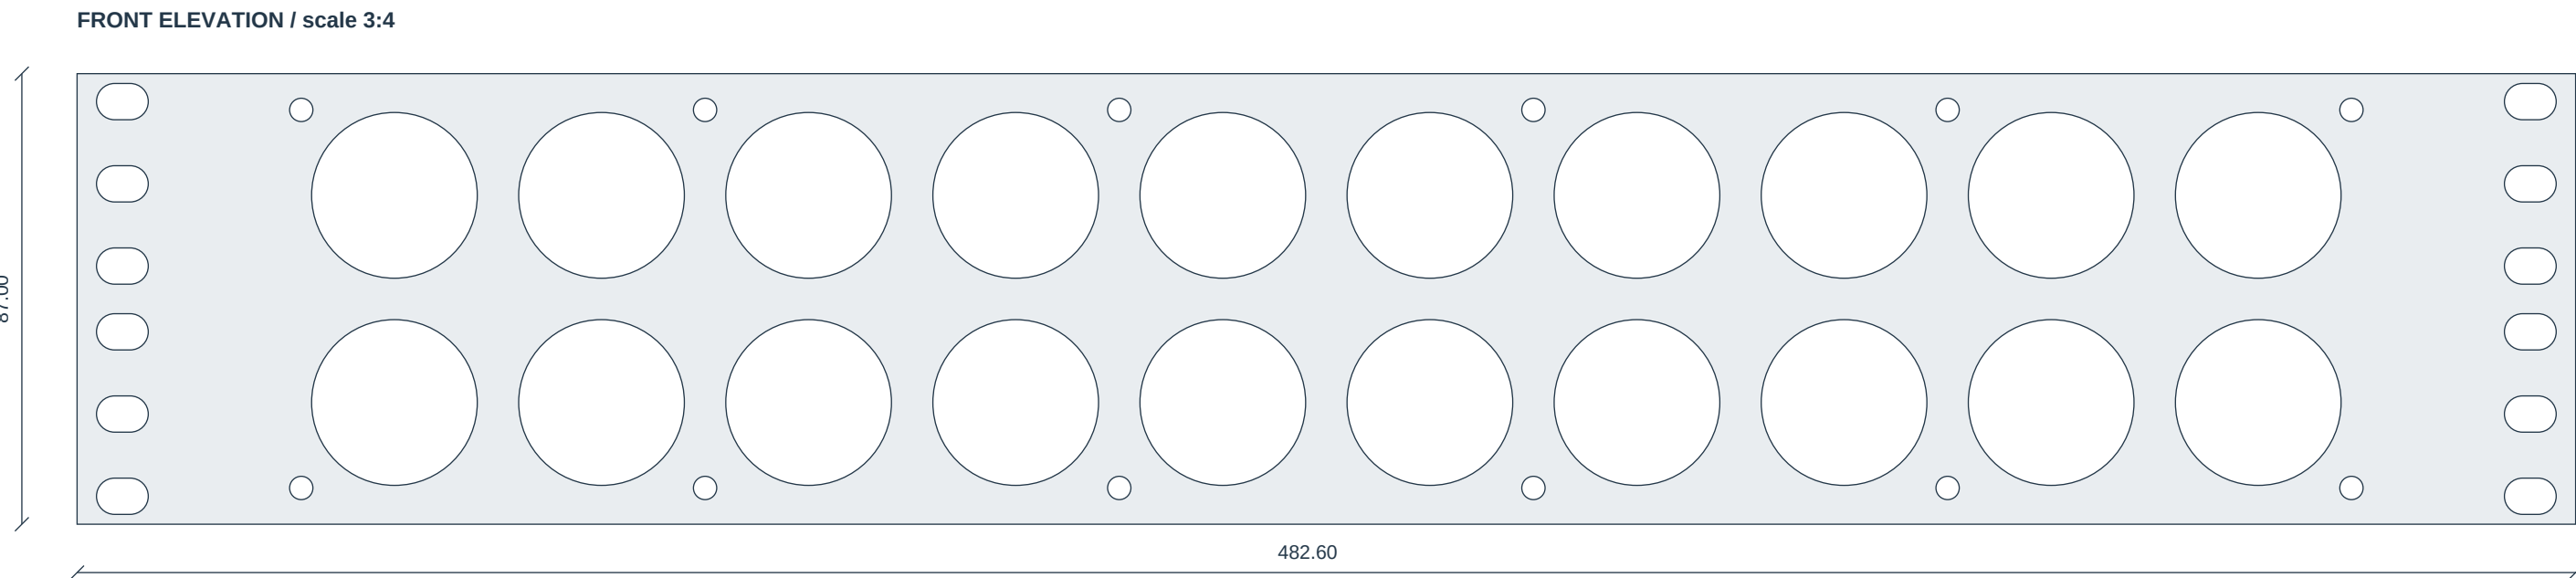

HOLE AND WINDOW SCHEDULE

20 port windows	Diameter 32.00 +0.10/0 THROUGH
	X = -180 to +180 in 40 increments; Z = 23.50, 63.50
12 body fixings	Diameter 4.50 +0.10/0 THROUGH
	X = -198, -120, -40, +40, +120, +198; Z = 7.00, 80.00
12 rack positions	10.00 x 7.00 horizontal slots, R3.50 ends
	X = -232.55, +232.55; Z = 5.40, 21.275, 37.15, 49.85, 65.725, 81.60

MANUFACTURING AND ASSEMBLY

Coordinates: signed X from width midplane; Z from bottom edge; rear mating plane Y = 0.

Unless specified: linear dimensions +/-0.10; hole-centre coordinates +/-0.10. No surface markings.

External deburr only: light edge break 0.10-0.20 maximum; keep the screw bearing faces flat.


Fit 12 x M4 x 16 ISO 7380-1 button-head screws, A2 stainless, Westfield WF2237; no washers in reference assembly.

Other plain-bearing M4 heads require a clearance/length check. Countersunk screws are incompatible.

Rack slots accept separately selected rack screws/cage nuts. Optional positions do not imply 12 installed rack screws.

RM10 / REVISION P

POM BODY / black unfilled declared POM-C or POM-H / 410 x 87 x 40 slab + 3 mm bosses

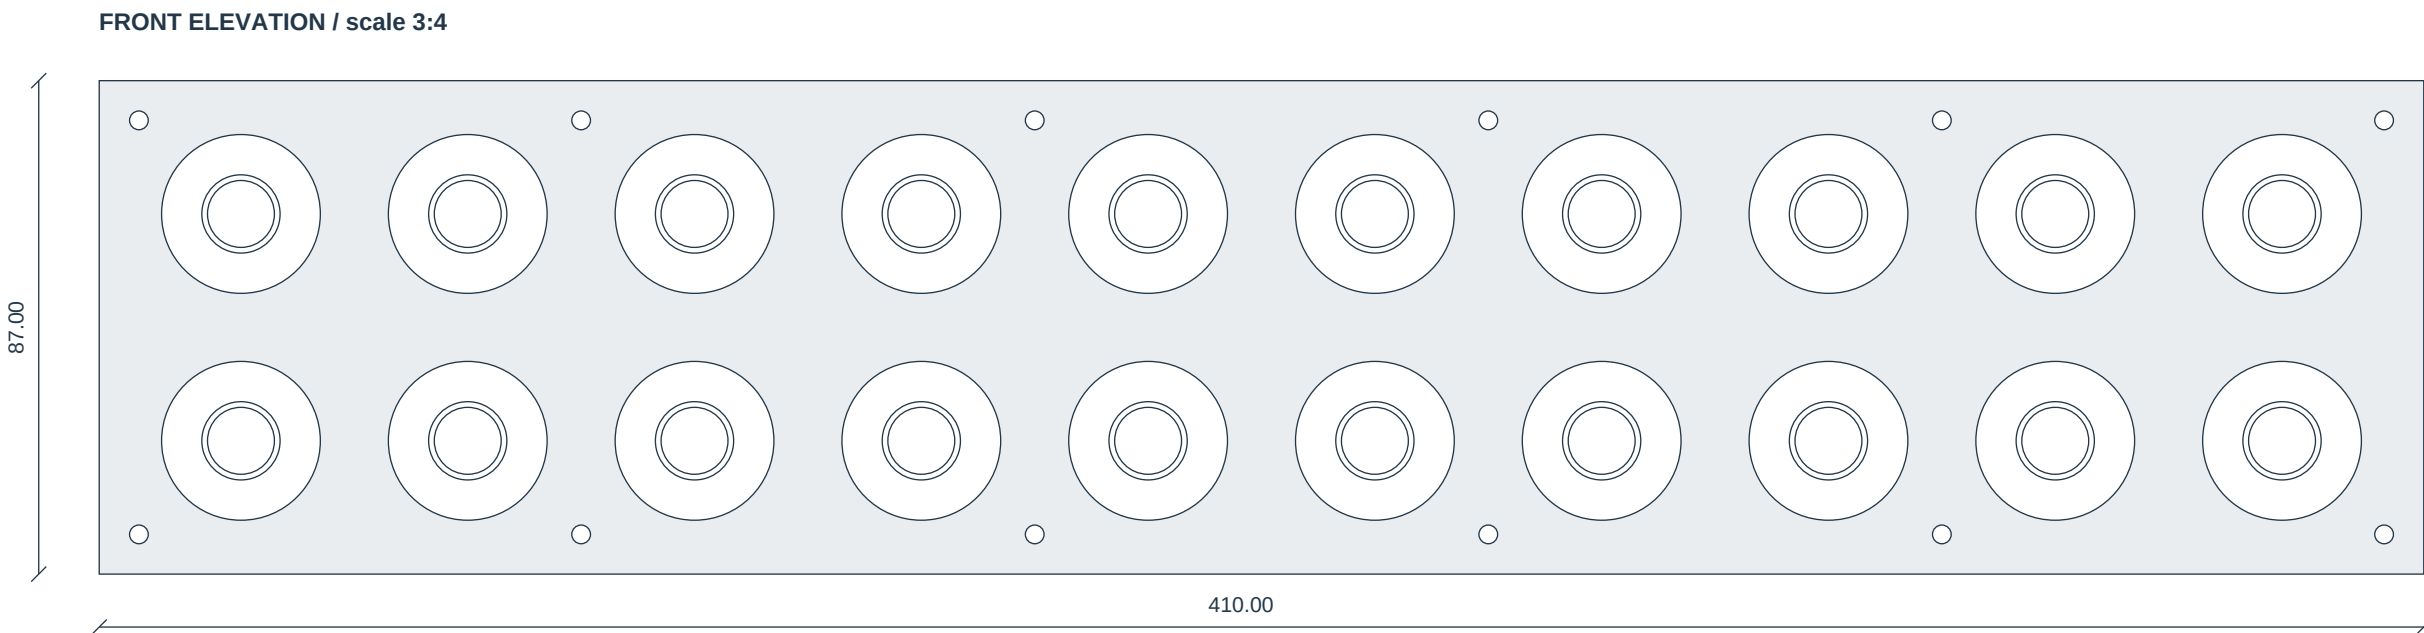

FRONT / SIDE MACHINING

- 20 FRONT: G 1/4 female, ISO 228-1; full thread 8 minimum after the 1 mm entry chamfer.
- Port centres X = -180 to +180 in 40 increments; Z = 23.50 / 63.50. Entry diameter 13.80 to 11.80, depth 1, 45 degrees.
- Front pilot: diameter 11.80, 23.00 full diameter from boss face to Y20, plus 118-degree drill point.
- 20 bosses: diameter 28.00 +/-0.10; height 3.00 +/-0.05 from Y0; root R1.00; outer lip C0.50 x 45 degrees.
- Two longitudinal galleries: diameter 11.80 THROUGH across 410 width; axes Y20, Z23.50 / 63.50.
- 4 SIDE: G 1/4 female at X+/-205, Y20, Z23.50 / 63.50; full thread 8 minimum after entry; entry as front ports.
- 12 FIXINGS: M4 x 0.7 - 6H; 16 minimum full-form thread after entry. Diameter 3.30 pilot x 18 full diameter from Y0.
- M4 entry: diameter 4.40 to 3.30, 0.55 deep x 45 degrees. Drill point 118 degrees; total pilot depth 18.99 nominal.
- Fixing centres match plate: X = -198, -120, -40, +40, +120, +198; Z = 7.00 / 80.00.
- 16 mm under-head screws through 2 mm plate reach 14 mm into the POM. Do not reuse the old 14 mm pilot depth.

SEALING, FINISH AND REVIEW SCOPE

- Flat fitting seal lands on boss ends and side faces; retain O-M02 surface requirements: refer to that issue for finish details.
- External deburr only; no internal/cross-hole deburring operation. Clean and flush out all loose swarf.
- No rear plate or perimeter seals. End plugs/fittings require their own face seals. Two independent continuous galleries.
- G1/4 and M4 threads are pilot representations in STEP, not plain finished holes. Tap to the drawing call-outs.
- General linear and coordinate tolerance +/-0.10 unless stated. Gallery drilling, material grade and thread process require vendor review.
- Separate variation: O-M02 is preserved. Drawing is for design review; refresh the supplier package if P is selected.