

RM10-O-M02-FACEPLATE


LAYOUT O • DETAIL ISSUE O-M02

FLAT STAINLESS RACK FACEPLATE — HOLE LOCATION SCHEDULE

Single-part machining drawing

20 × Ø32 +0.20/0 THRU • 6 × Ø4.5 +0.10/0 THRU with Ø8 +0.10/0 × 90° ±1° CSK • 12 × 10 × 7 slots

All coordinates below: signed X from width midplane B; Z from bottom C. ±0.10 unless otherwise shown.

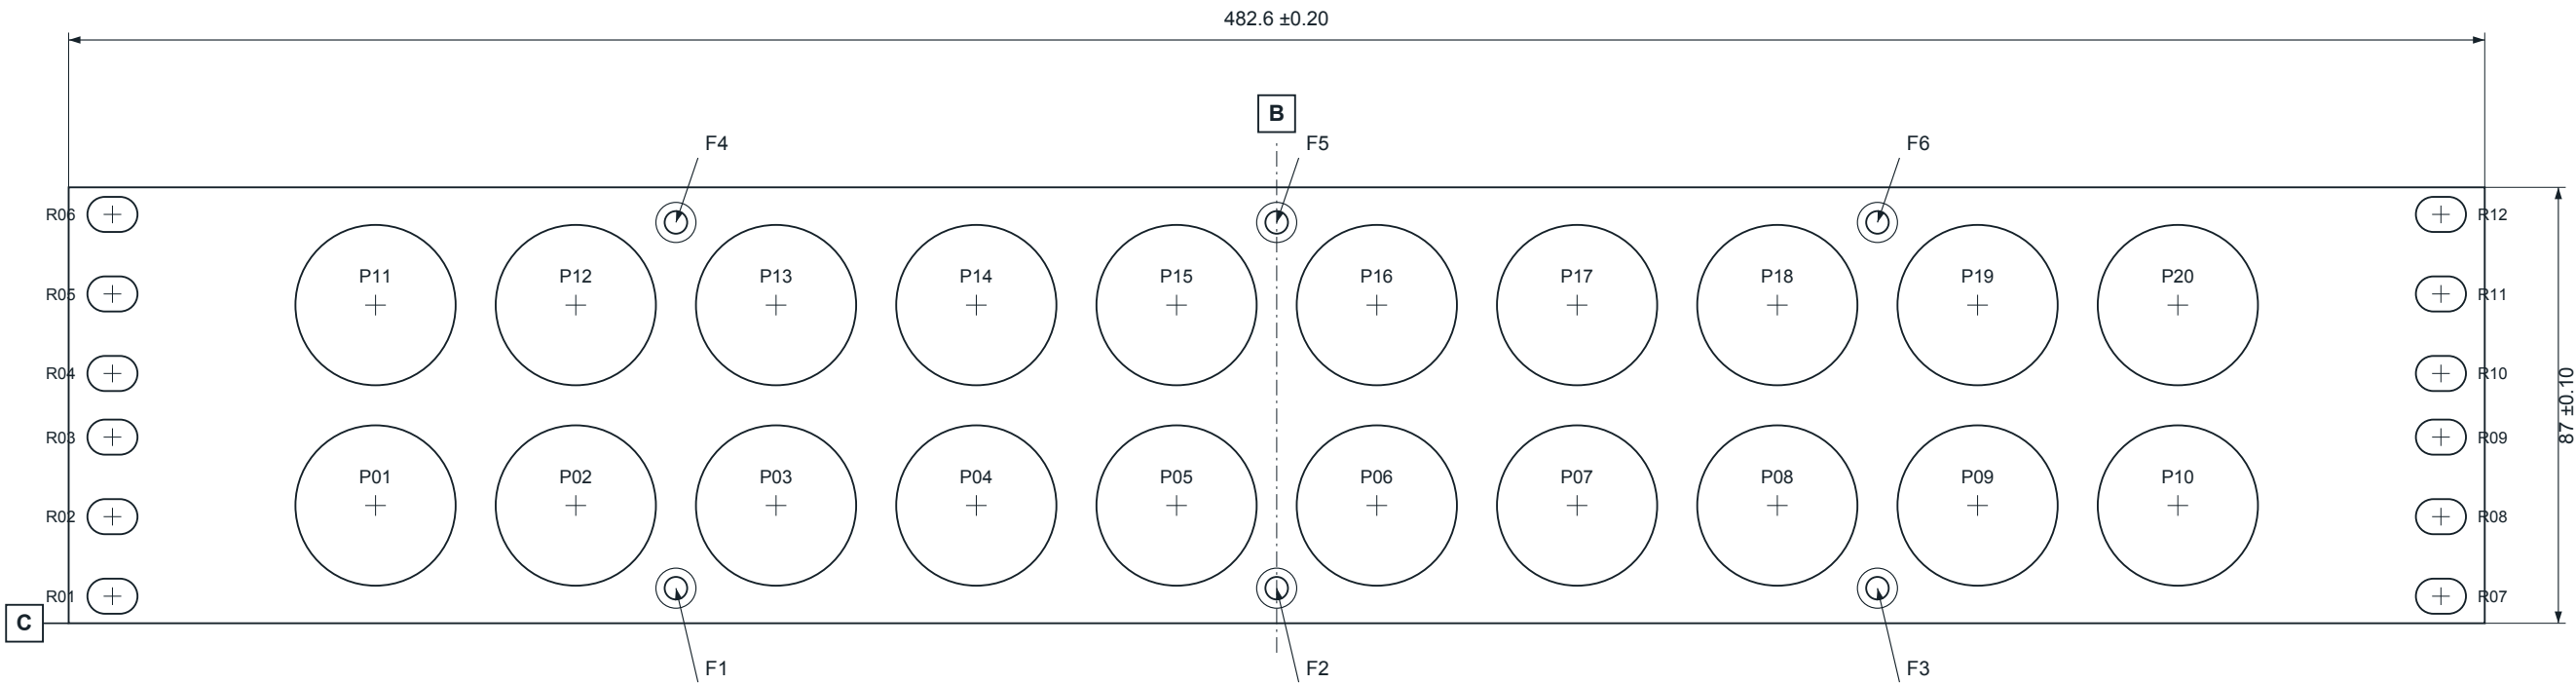

WINDOW IDs	X ±0.10	Z ±0.10
P01 / P11	-180	23.5 / 63.5
P02 / P12	-140	23.5 / 63.5
P03 / P13	-100	23.5 / 63.5
P04 / P14	-60	23.5 / 63.5
P05 / P15	-20	23.5 / 63.5
P06 / P16	20	23.5 / 63.5
P07 / P17	60	23.5 / 63.5
P08 / P18	100	23.5 / 63.5
P09 / P19	140	23.5 / 63.5
P10 / P20	180	23.5 / 63.5

M4 CLEARANCE	X ±0.10	Z ±0.10
F1	-120	7
F2	0	7
F3	120	7
F4	-120	80
F5	0	80
F6	120	80

SLOT IDs L / R	X LEFT / RIGHT	Z ±0.10
R01 / R07	-232.55 / +232.55	5.4
R02 / R08	-232.55 / +232.55	21.275
R03 / R09	-232.55 / +232.55	37.15
R04 / R10	-232.55 / +232.55	49.85
R05 / R11	-232.55 / +232.55	65.725
R06 / R12	-232.55 / +232.55	81.6

All six fixing holes are CLEARANCE holes.
NO TAPPED HOLES IN THIS PLATE.
Countersink on FRONT / outside face only.

Slots: 10 ±0.10 long × 7 +0.10/0 wide.
End radii: R3.5 REF. Long axis along X.
Rack fasteners are selected by the builder.

A = flat POM-facing rear plane, Y0. B = derived width midplane, X0. C = bottom edge, Z0.
Thickness and countersink section: sheet 2. DXF is the through-cut profile only; countersinks are in STEP/PDF.
P01–P20, F1–F6 and R01–R12 are drawing IDs only. Do not engrave, print or laser-mark the part.

Geometry: approved Revision O
Detail issue: O-M02 • 2026-09-15
No tapped holes; six countersinks only

Scale: 0.68:1
Third-angle; views labelled
No product markings

SHEET 1 / 2
PDF + matching STEP
Quotation / supplier DFM

304 STAINLESS / EN 1.4301


Units: mm • DIN ISO 2768-1 m unless stated
Dimensions at 20 °C • Do not scale drawing

RM10-O-M02-FACEPLATE

COUNTERSINK DETAIL, FINISH AND INSPECTION REQUIREMENTS

Single-part machining drawing

DETAIL A — F1–F6, section through each fixing hole

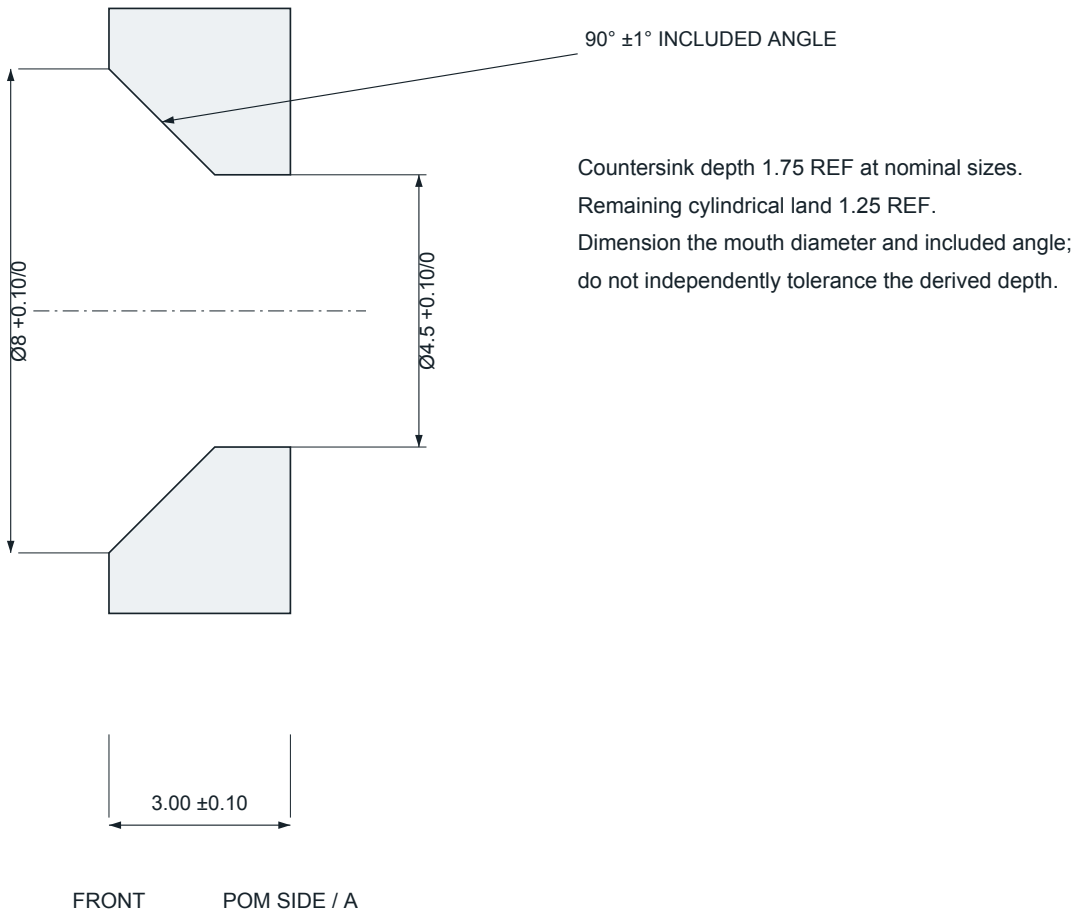

MANUFACTURING

1. Finished thickness 3.00 ±0.10. No bends.
2. Mill or profile-cut the blank and openings;
finish-machine the six countersinks from the front.
3. All opening positions ±0.10 in X and Z.
4. Free-state flatness of POM-facing plane A: 0.30.
5. Ra ≤3.2 µm on face A and countersink seats.
6. Remove cutting dross and all raised burrs.
Light edge break 0.10–0.20 max unless detailed.
Do not enlarge countersink mouths during deburring.
7. No coating, bead blasting, engraving or markings.
Clean and dry after machining. No loose abrasive.
8. Finish dimensions apply after all processing.

FASTENER INTERFACE

Specified head: A4 M4 × 12 DIN 7991 hex socket; maximum head Ø7.96 (Westfield reference).

DIN 965 Z M4 Pozi alternative: nominal head Ø7.5. It seats lower in the same 90° countersink.

Nominal recess for Ø7.96 head: 0.02 mm; Ø7.5 head: 0.25 mm (ideal cone geometry only).

Inspect with the specified screw. Target flush to slightly recessed; no more than 0.20 mm proud.

Do not substitute a larger-head standard under an equivalent-name label without checking the fit.

Inspect 20 windows, 6 clearance holes + countersinks, and 12 slots. No threads in this part.

Outer slot-to-edge ligament is 1.90 REF before edge breaking; do not reduce the outer profile.

304 STAINLESS / EN 1.4301

Units: mm • DIN ISO 2768-1 m unless stated

Dimensions at 20 °C • Do not scale drawing

Geometry: approved Revision O

Detail issue: O-M02 • 2026-09-15

No tapped holes; six countersinks only

Scale: DETAIL 8:1

Third-angle; views labelled

No product markings

SHEET 2 / 2

PDF + matching STEP

Quotation / supplier DFM