


RM10-Q-M01-FACEPLATE

Flat rack faceplate - through features and finish

FRONT VIEW 3:4 - SAME COORDINATES AS BODY FRONT

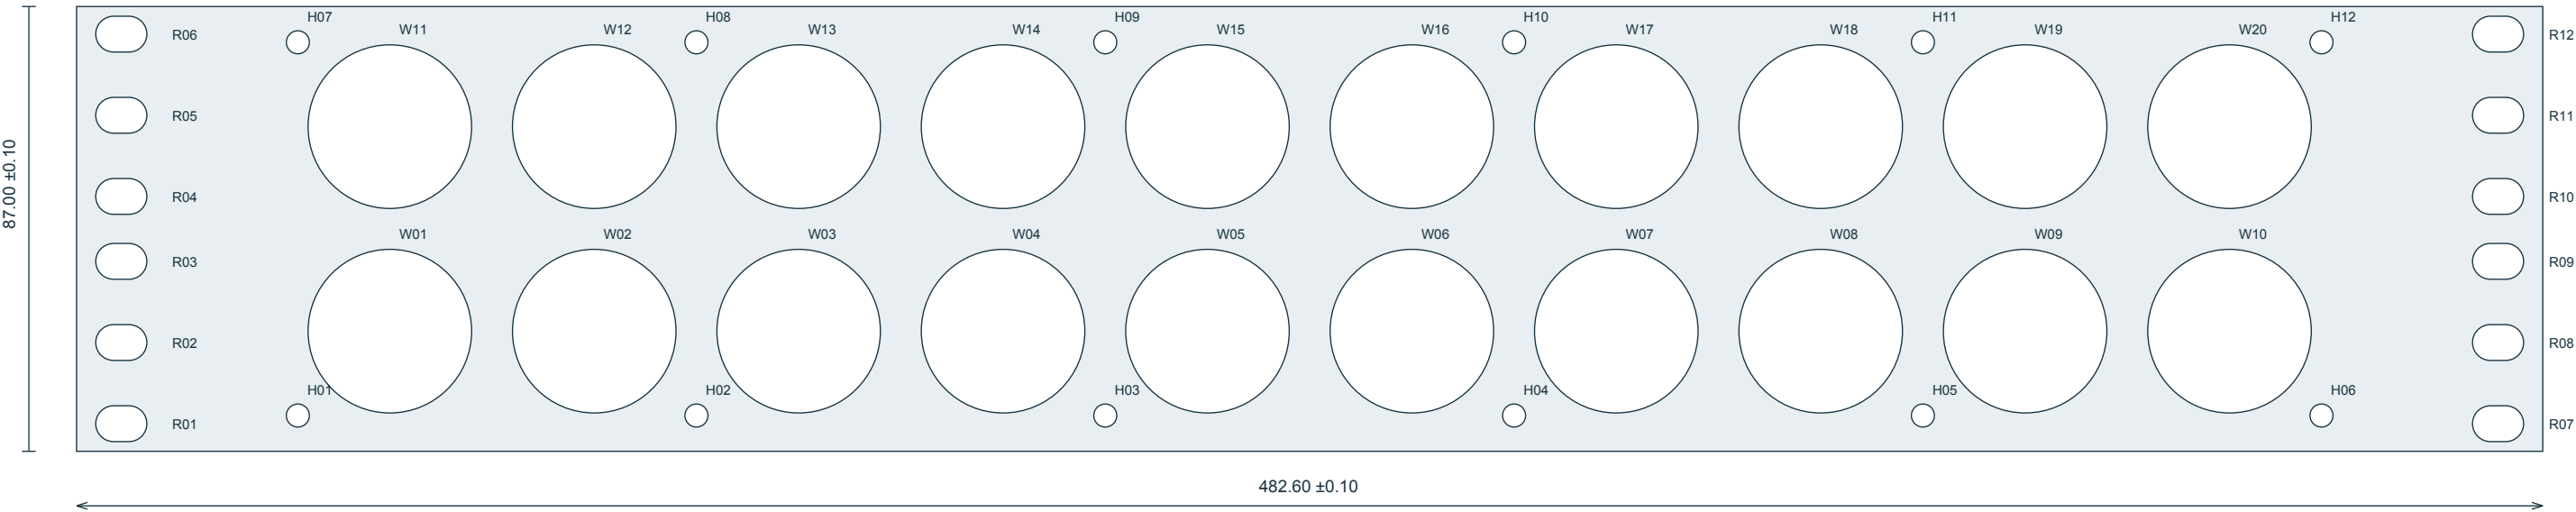

RAW STAINLESS SHEET FINISH - BOTH broad faces; no brushing or polishing.

- W01-W20: 20x Ø32.00 +0.10/0 THROUGH port windows.
- H01-H12: 12x Ø4.50 +0.10/0 THROUGH M4 retention holes.
- R01-R12: 12x horizontal 10.00 ±0.10 ×7.00 +0.10/0 THROUGH slots; R3.50 ends.
- NO TAPPED HOLES. NO COUNTERSINKS. Flat plate; all openings through.
- Coordinate origin: X0 derived width midplane, Z0 bottom edge; POM mating plane A at Y0.
- Sheet occupies Y-2 to Y0. All feature axes normal to the broad faces; coordinate schedule on sheet 2.
- Free-state flatness of mating plane A: 0.30 maximum. Dimensions apply after finishing.
- External deburr / edge break 0.10-0.20 max, both faces; maintain flat screw bearing seats.
- Edge breaks are finishing operations; nominal STEP/DXF cut profile has no face-edge breaks.
- Laser-cut profile/windows/slots; drill or finish holes where required to achieve call-outs.
- No brushing, polishing, coating, paint, engraving, printing or other product markings.
- General DIN ISO 2768-1 class m; H centres ±0.05; other centres ±0.10; specific limits override.
- H01-H12: finished plain bores; preserve the specified full through diameter.
- Supplier must confirm unilateral hole sizes, flatness and specified edge finish before fabrication.

RM10-Q-M01-FACEPLATE

Coordinate schedules - all 44 through openings

PORT WINDOWS

ID	X	Z
W01	-180.000	23.500
W02	-140.000	23.500
W03	-100.000	23.500
W04	-60.000	23.500
W05	-20.000	23.500
W06	20.000	23.500
W07	60.000	23.500
W08	100.000	23.500
W09	140.000	23.500
W10	180.000	23.500
W11	-180.000	63.500
W12	-140.000	63.500
W13	-100.000	63.500
W14	-60.000	63.500
W15	-20.000	63.500
W16	20.000	63.500
W17	60.000	63.500
W18	100.000	63.500
W19	140.000	63.500
W20	180.000	63.500

BODY RETENTION

ID	X	Z
H01	-198.000	7.000
H02	-120.000	7.000
H03	-40.000	7.000
H04	40.000	7.000
H05	120.000	7.000
H06	198.000	7.000
H07	-198.000	80.000
H08	-120.000	80.000
H09	-40.000	80.000
H10	40.000	80.000
H11	120.000	80.000
H12	198.000	80.000

OPTIONAL RACK SLOTS

ID	X	Z
R01	-232.550	5.400
R02	-232.550	21.275
R03	-232.550	37.150
R04	-232.550	49.850
R05	-232.550	65.725
R06	-232.550	81.600
R07	232.550	5.400
R08	232.550	21.275
R09	232.550	37.150
R10	232.550	49.850
R11	232.550	65.725
R12	232.550	81.600

W diameter Ø32.00 +0.10/0; H diameter Ø4.50 +0.10/0; R dimensions 10.00 ±0.10 ×7.00 +0.10/0.

H01-H12 X/Z coordinates ±0.05; W/R coordinates ±0.10 from the stated origin. Do not accumulate chained pitch errors.

Port pitch 40.00 REF horizontally and vertically. Rack column pitch 465.10 REF.

Raw stainless sheet finish on both broad faces. No brushing, polishing or surface markings.