



All other nRF52 Pins

SKY66112 Control GPIO



ARM SWD Pins: Use 10pin SWD Header

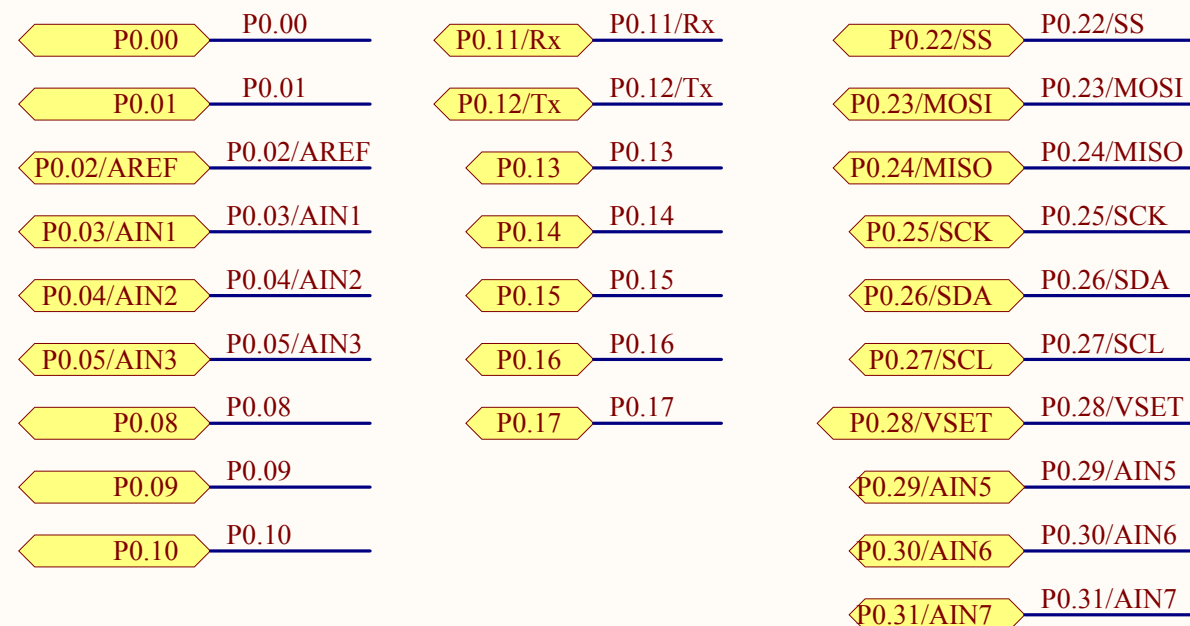



32MHz XTAL

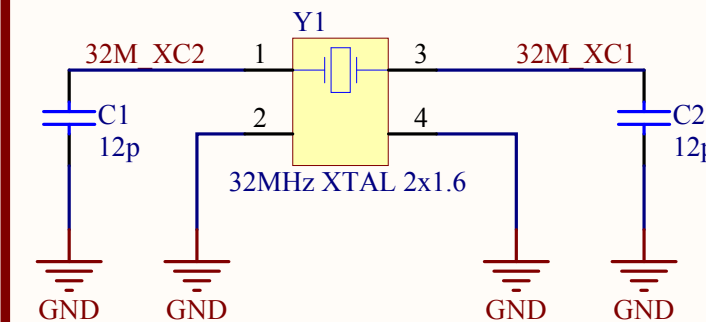

32MHz Requirements:
 Differential
 +/-40 ppm Min Freq Tolerance
 12pF MAX Load Cap
 7pF MAX Shunt Capacitance
 60 Ohm = CO = 7pF
 80 Ohm = CO = 5pF
 100 Ohm = CO = 3pF

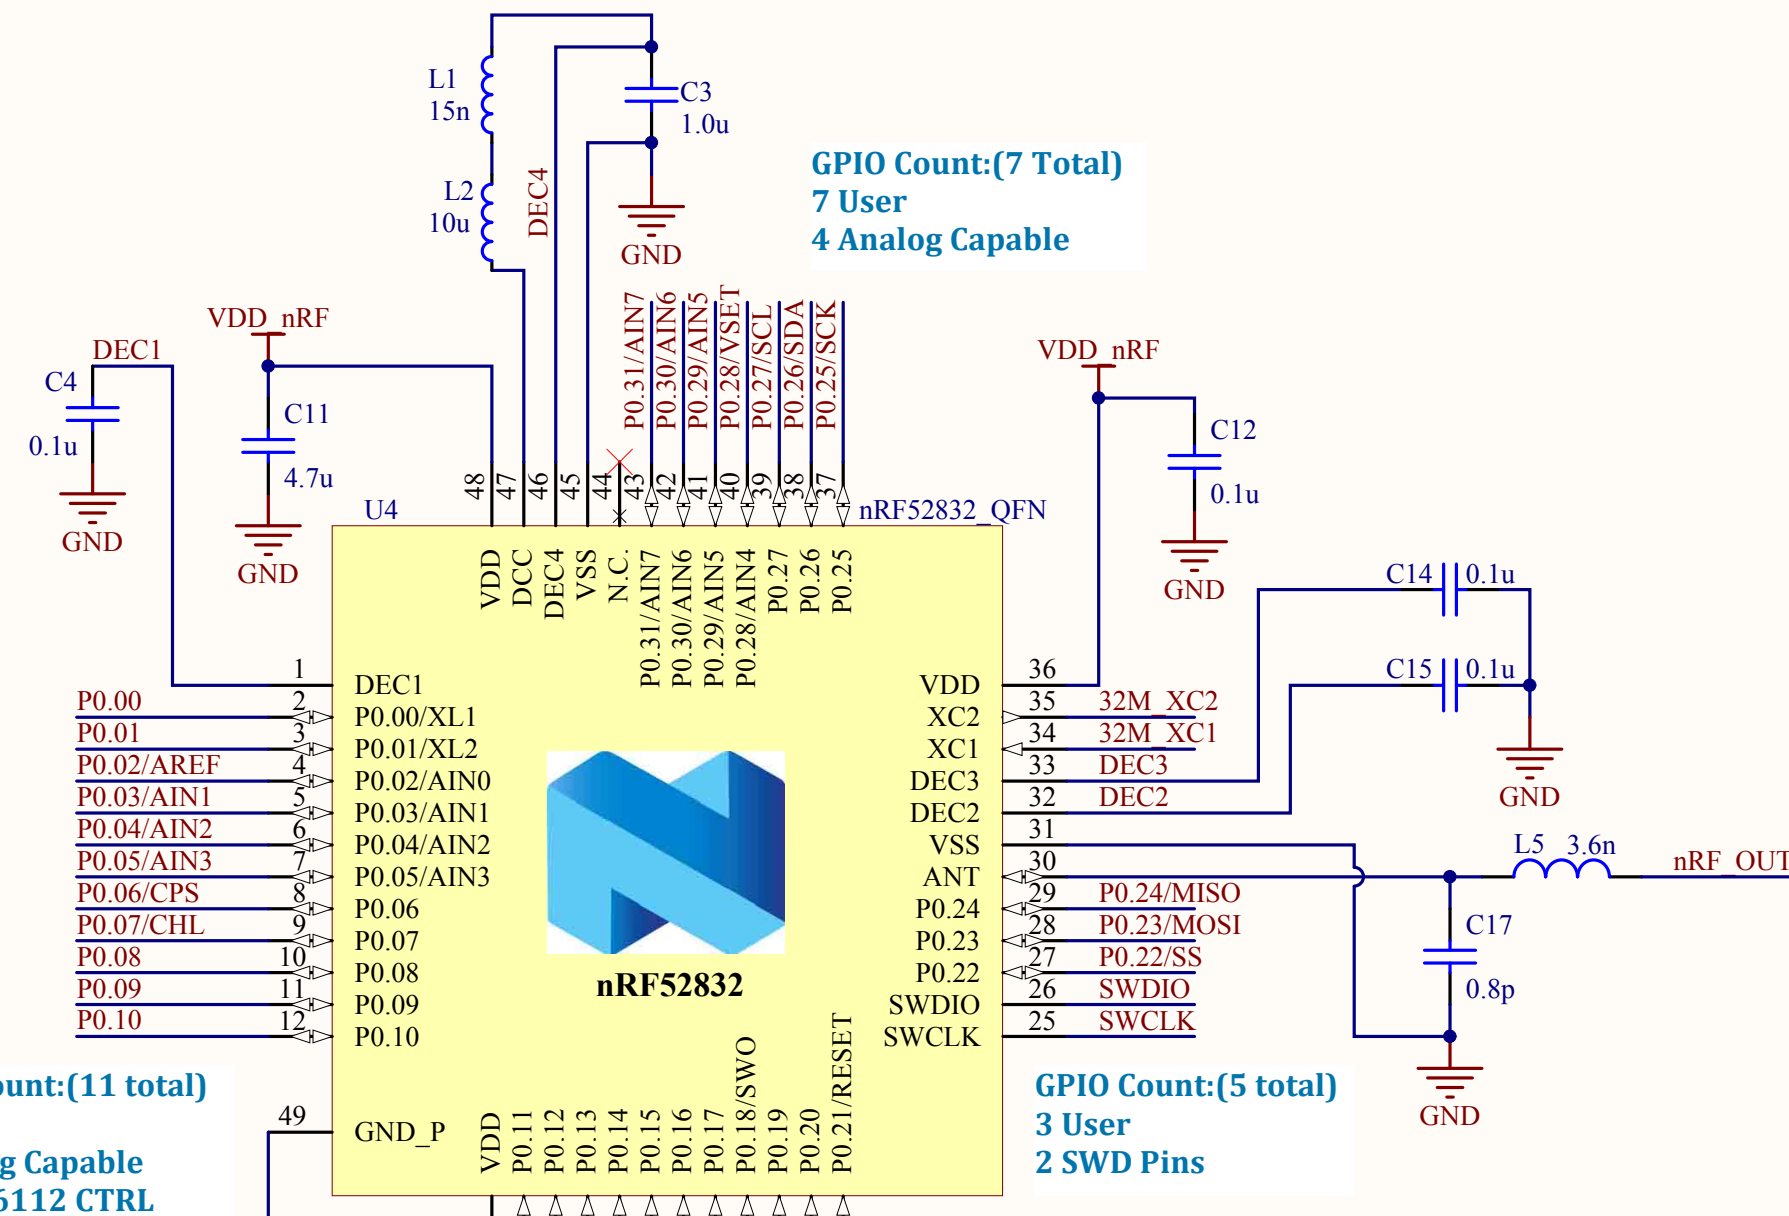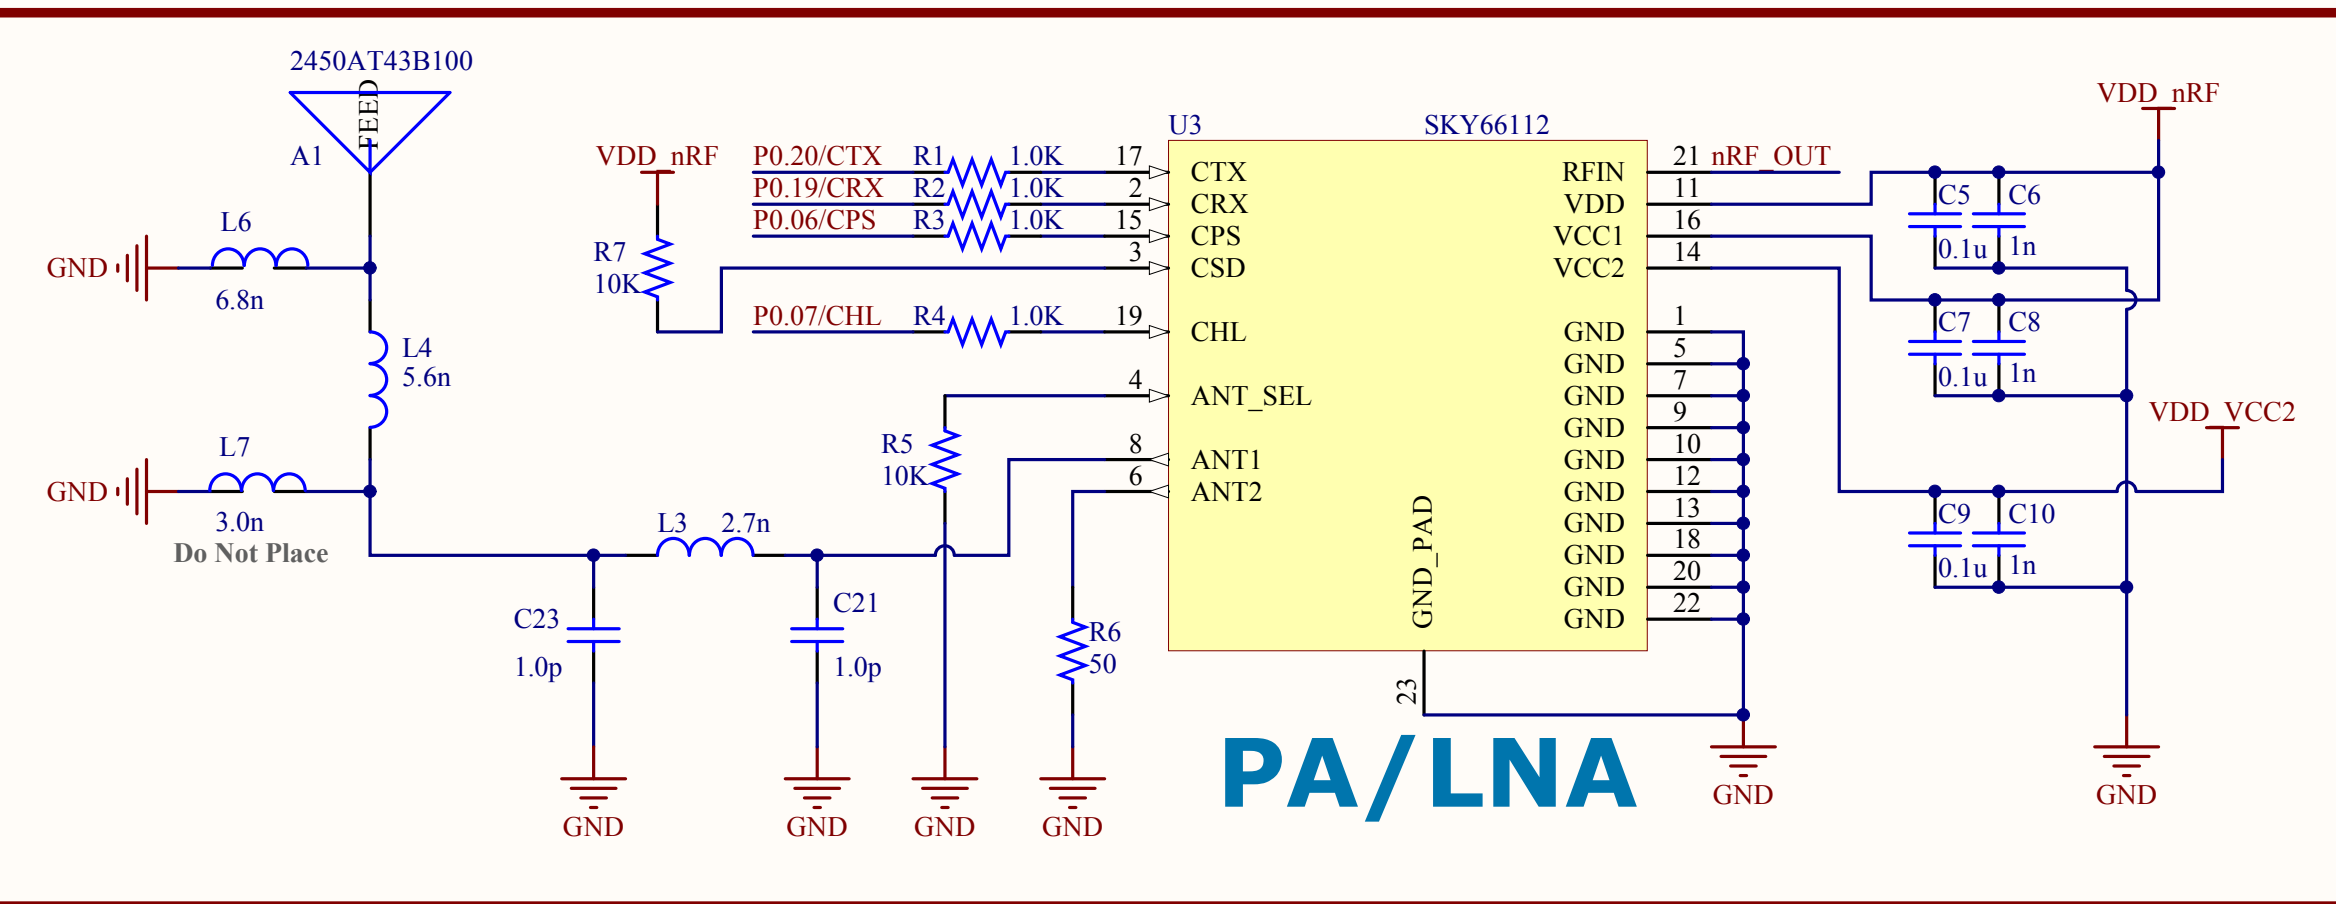

Bottom Pads

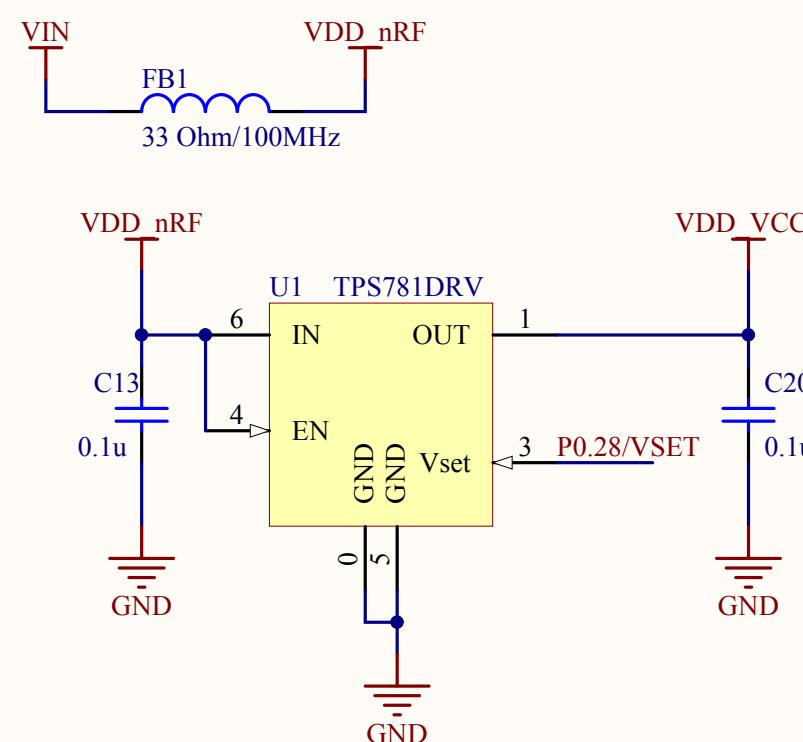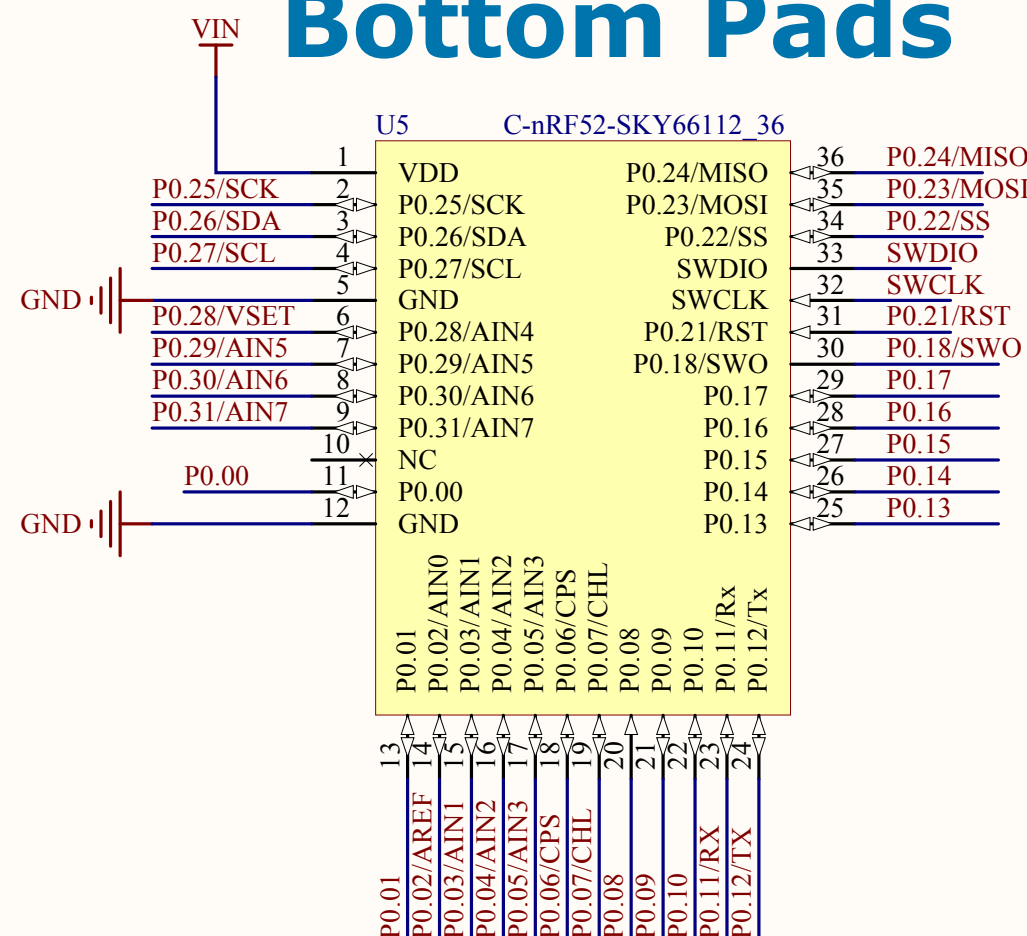

Title C-nRF52-SKY66112			<i>Component Distributors</i> <i>www.cdiweb.com</i>
Size: B	Number: 1	Revision: V1.1	
Date: 11/4/2016	Time: 1:08:12 PM	Sheet 1 of 1	
File: C-nRF52-SKY66112_V1.1.pdf			