


CAPS LED is connected to PPI 8255 PC6, pin 11 of DIP package.
Active LOW.
KANA LED is connected to YM2149 IOB7, pin 6 of DIP package.
Active LOW.
If not used, let pin floating, as it is already connected to an internal pull up.

JP1 is not a resistor, but wire jumper, to make the pcb a single copper layer one.

Designed by Evandro Souza
Free to use as is.
For more details, see the technical docs.

Sheet: /			
File: PS2-MSX-F1.sch			
Title: PS/2 Adapter for MSX keyboard Project using STM32 (Blue Pill)			
Size: A4	Date:	November 1st, 2021	Rev:
KiCad E.D.A. kicad (5.1.6)-1			Id: 1/2

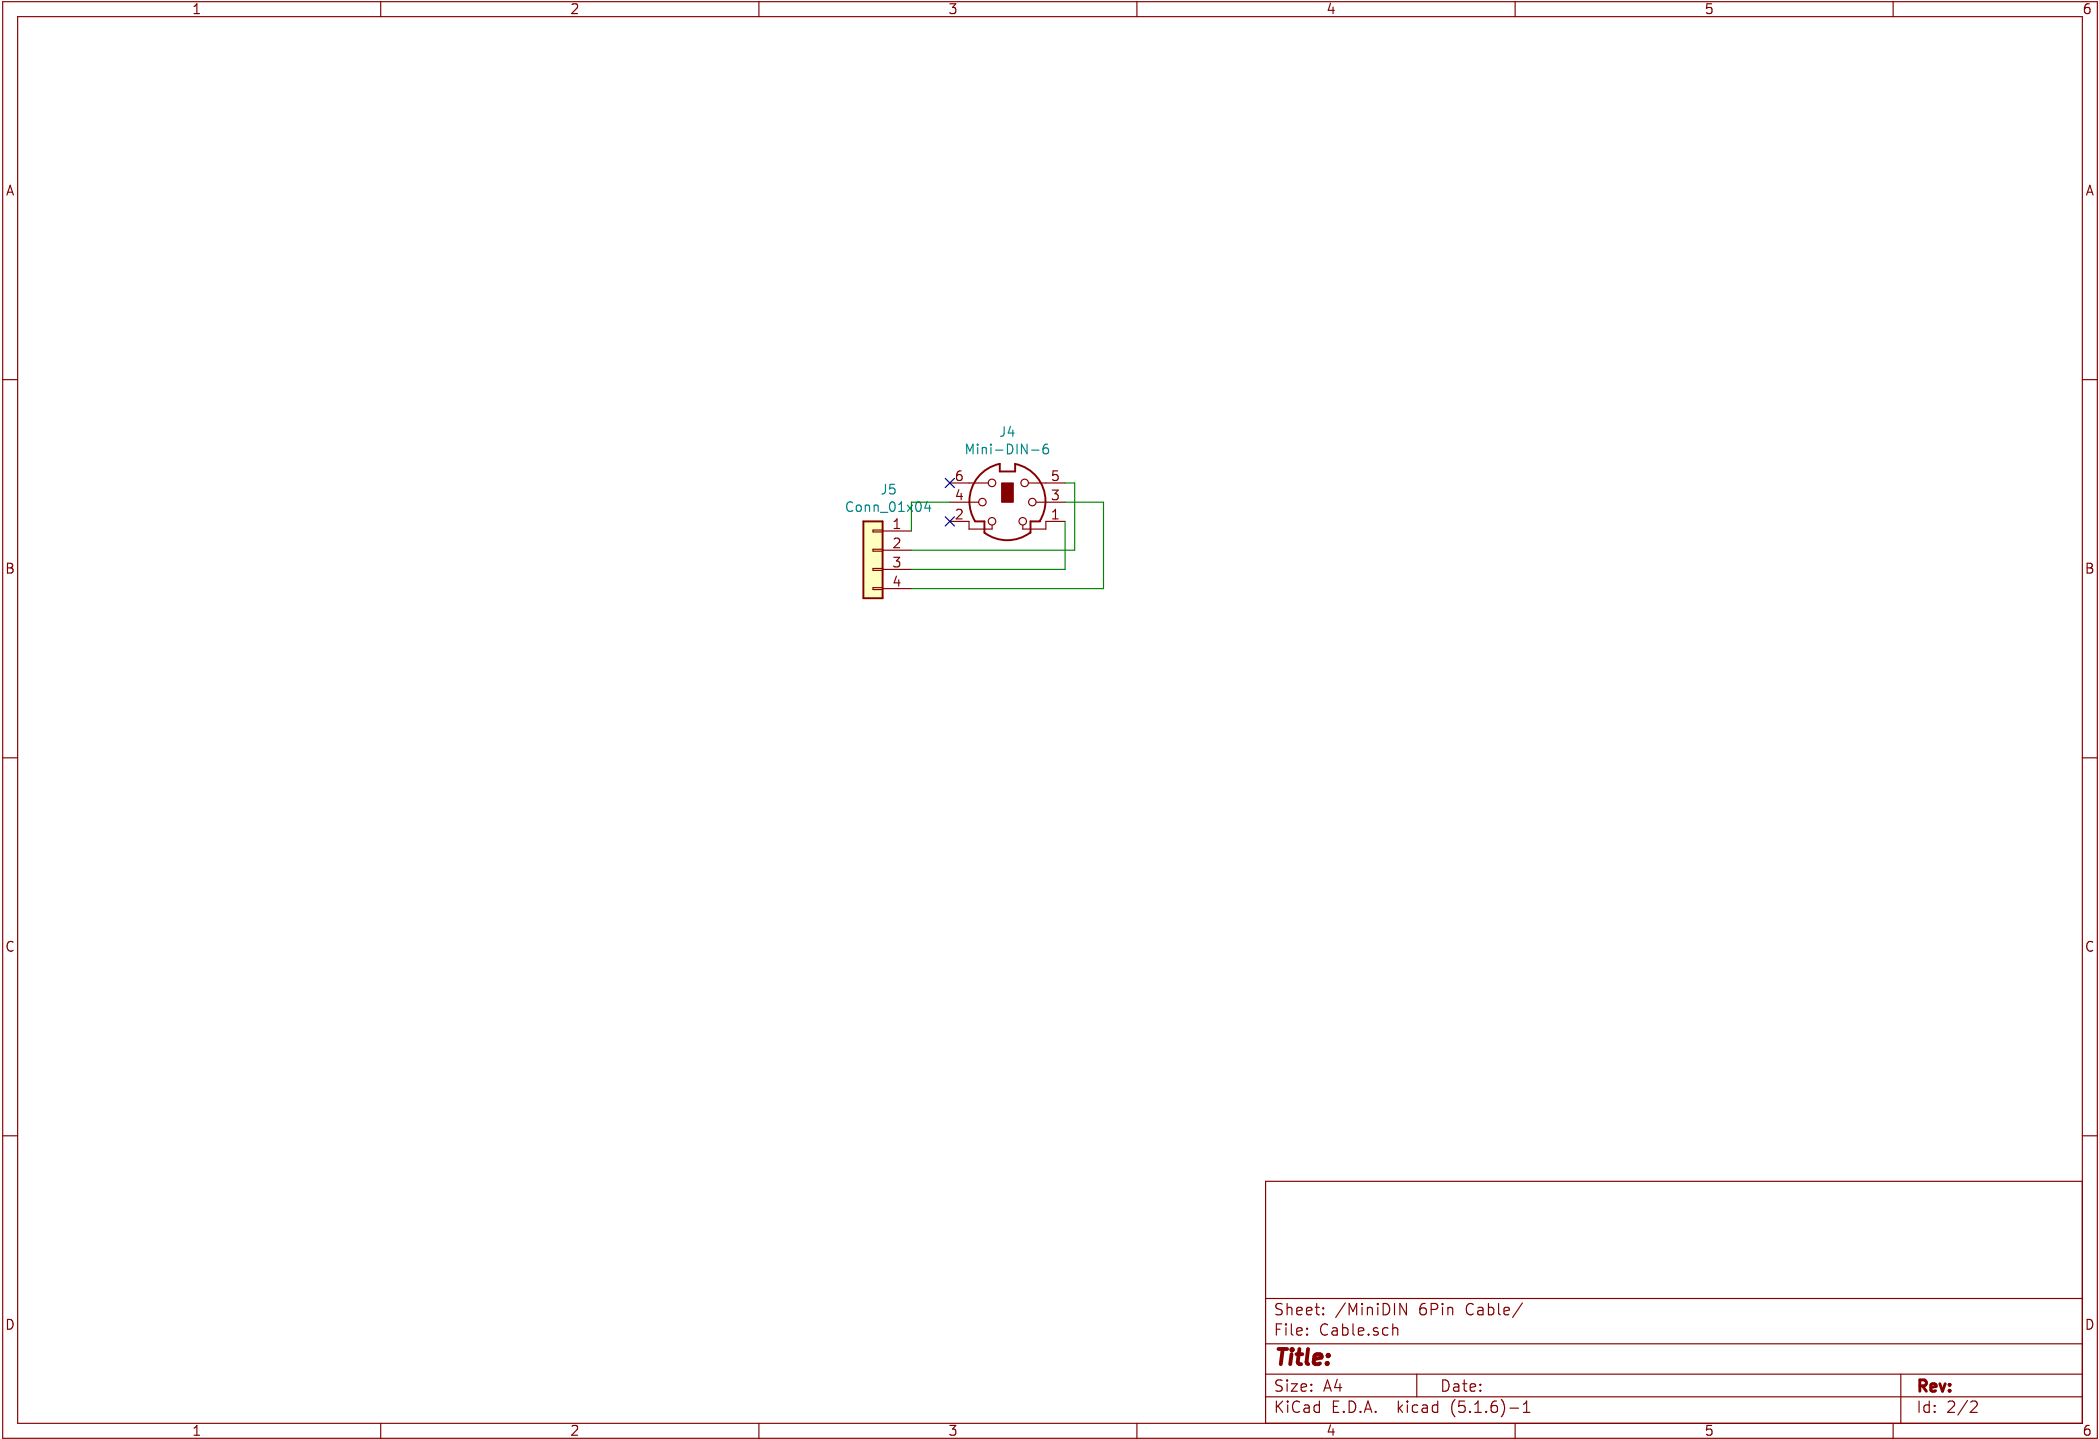

Sheet: /MiniDIN 6Pin Cable/ File: Cable.sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. kicad (5.1.6)-1	Id: 2/2	