



Reading the case-study figures: tube models, gap geometry, sign convention

(a) Disturbance interval =
centre d_c + radius d_r

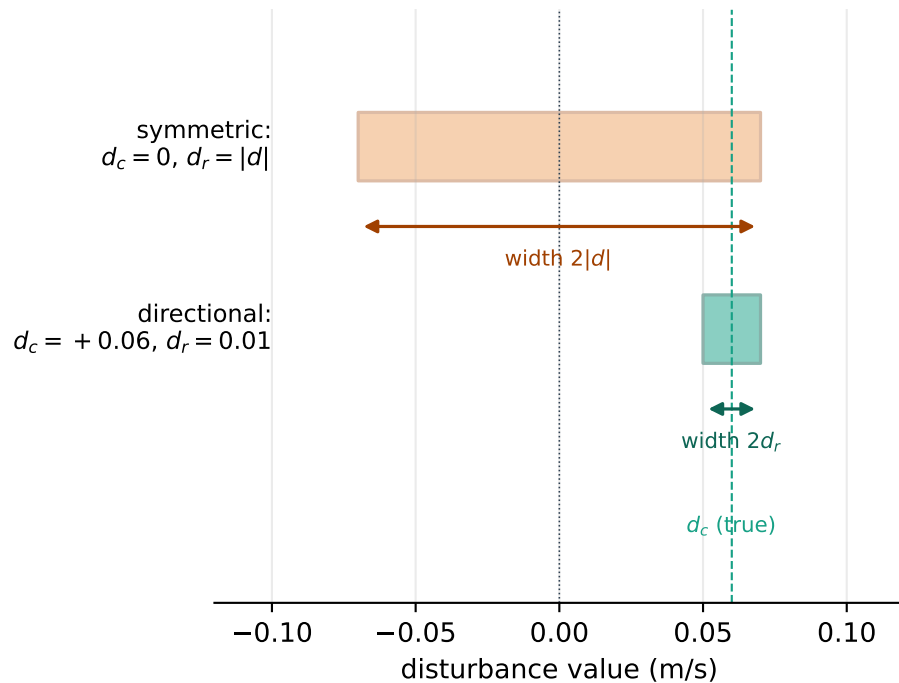

(b) Tube reach at one timestep
left obstacle, +x wind

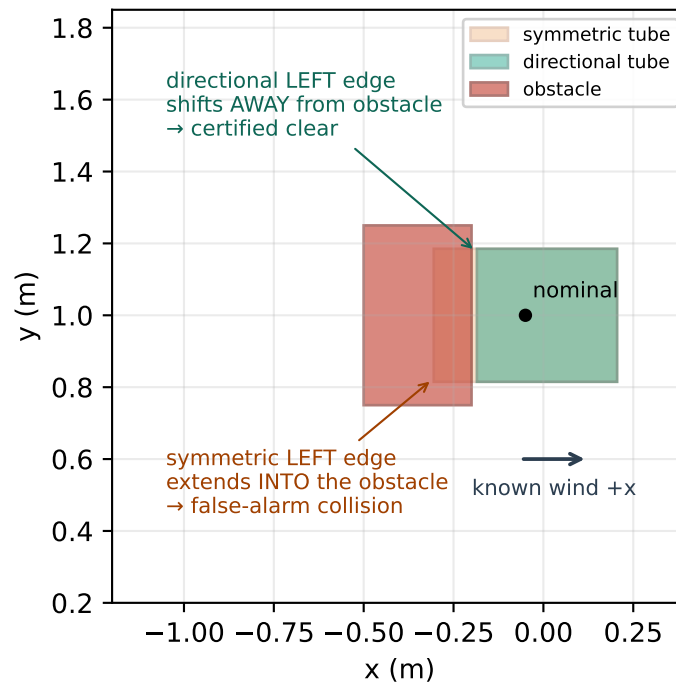

(c) Hard worst-case margin
= signed gap between tube and obstacle

