

How to twist the yarns


Before starting to twist, you have to check that the drive wheels are parallel. Make a double check that all of the screws are tightened enough.

1. Prepare the yarns.

Put the yarns behind the machine. Make sure that there is nothing in the way and the yarns come from the bobbin smoothly.


2. Set the yarn. (back drive wheels)

The yarns go through the back yarn guide and then above the back drive wheels. You don't use the back drive wheels and motor for twisting.

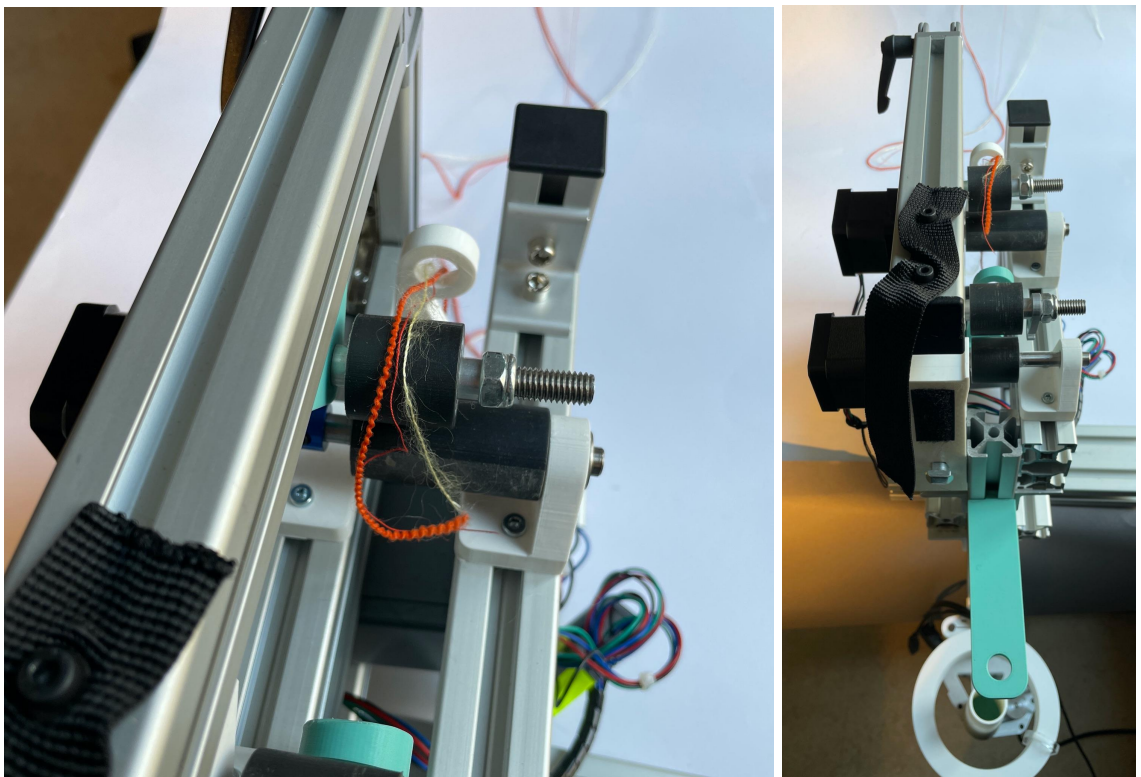



3. Set the yarn. (front drive wheels)

Pass the yarn through the front yarn guide and then between the wheels.

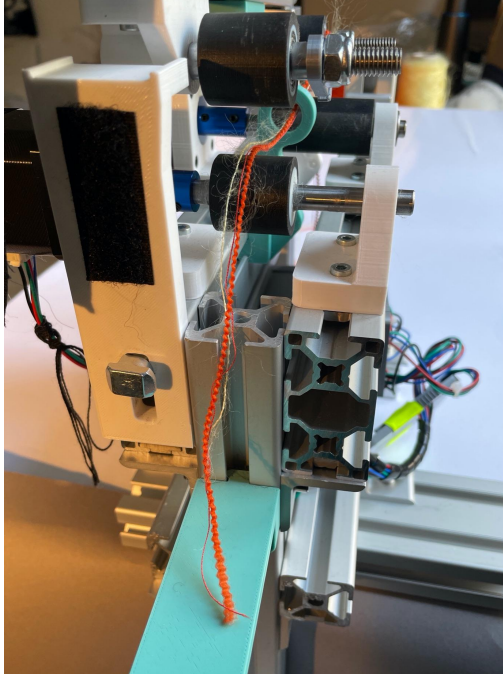

4. Pass the yarns through the yarn outlet

Pass the yarns through the yarn outlet.

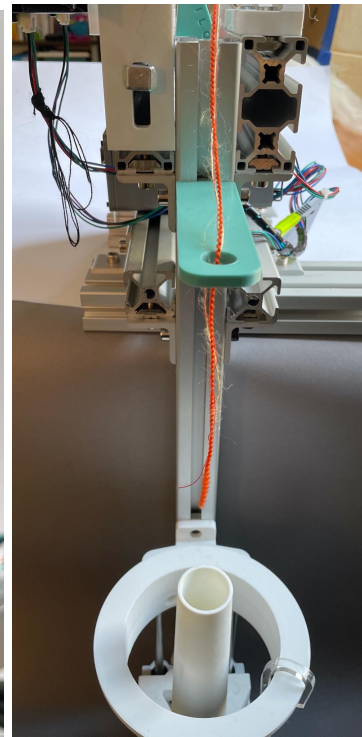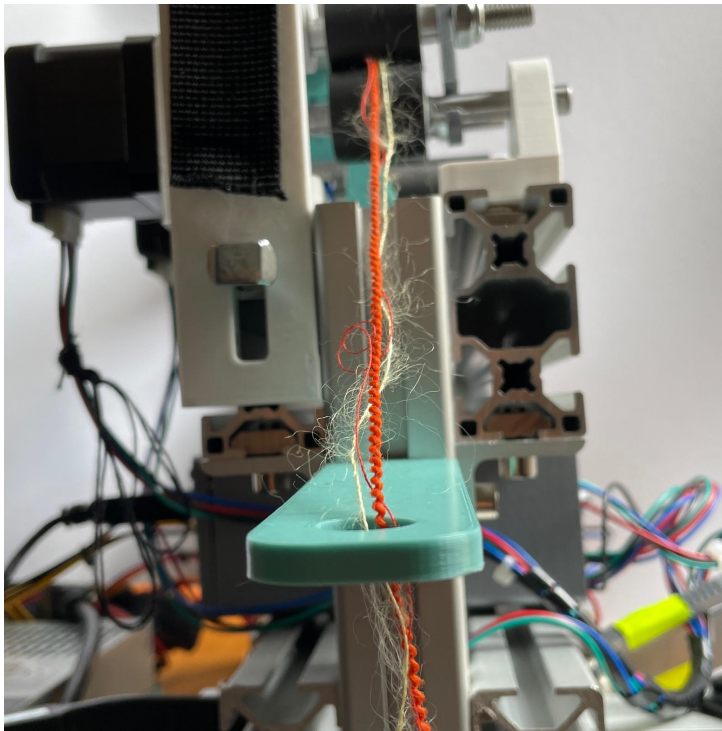


5. Put the yarns into the bobbin.

put the yarns into the bottom of the bobbin, then attach the bobbin to the spindle carrier.



6. Wrap the yarn around the bobbin.

Rotate the bobbin with the thread until the thread is on the same height as the traveler. Then put the thread through the hook.

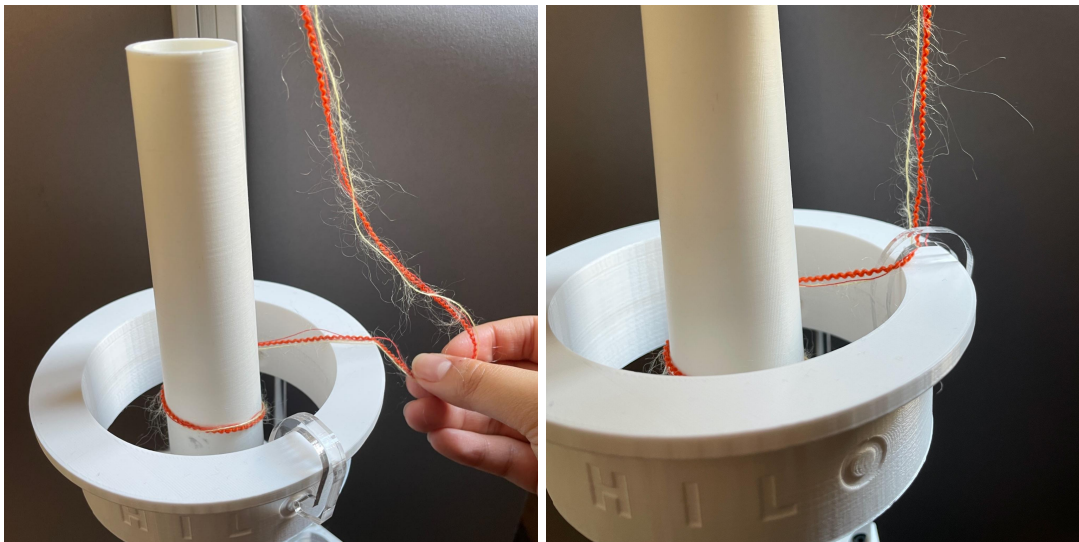

7. Close it.

Close the upper arm with the velcro. Make sure that the roving is between wheels.

