


# How to start spinning

Before starting to spin, you have to check that the drive wheels are parallel. Make a double check that all of the screws are tightened enough. It is also recommended that the humidity in the room is approximately 60% to work with machine.

## 1. Set the starting thread

put the scrap thread into the bottom of the bobbin, then attach the bobbin to the spindle carrier.

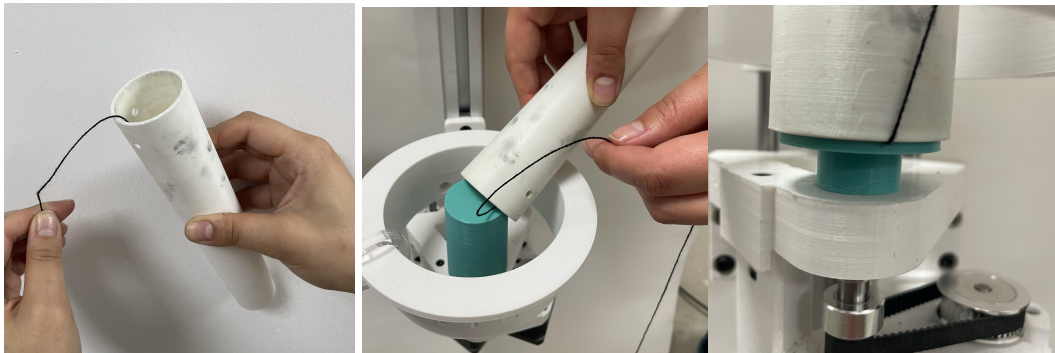


## 2. Wrap the yarn around the cone

Rotate the bobbin with the thread until the thread is on the same height as the traveler. Then put the thread through the hook.



## 3. Pass the thread through the yarn traveler

pass the thread through the yarn outlet and pause it on the side.

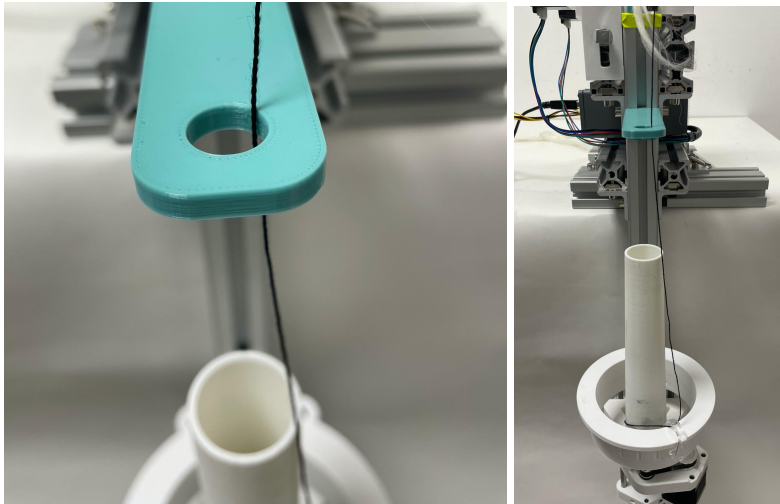


#### 4. Prepare the roving (fibres)

Put the roving neatly behind the machine. Make sure that the roving has no knot and there is nothing in the way.




#### 5. Set the roving (back)

Put the roving through the back Yarn Guide of the machine and guide them on the drive wheel to the front.

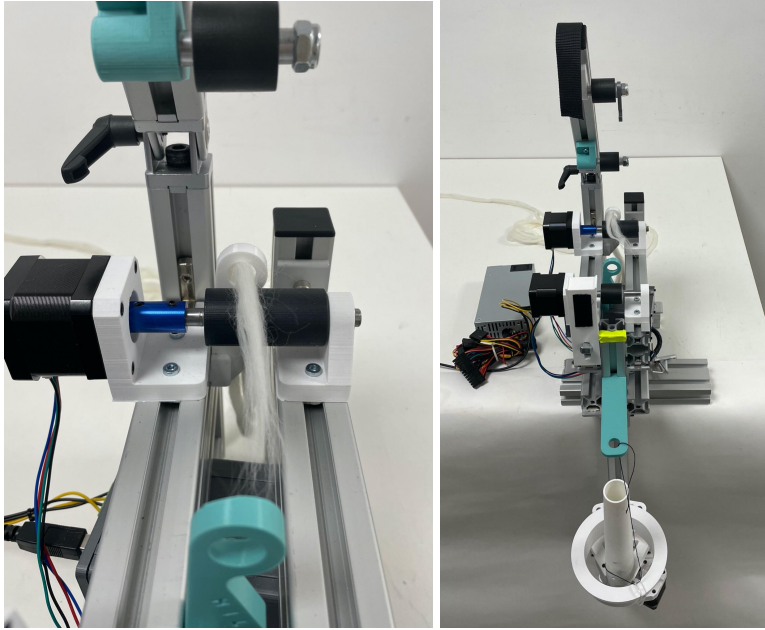


## 6. Set the roving (front)

Then put the roving through the front Yarn Guide and on the front drive wheel.

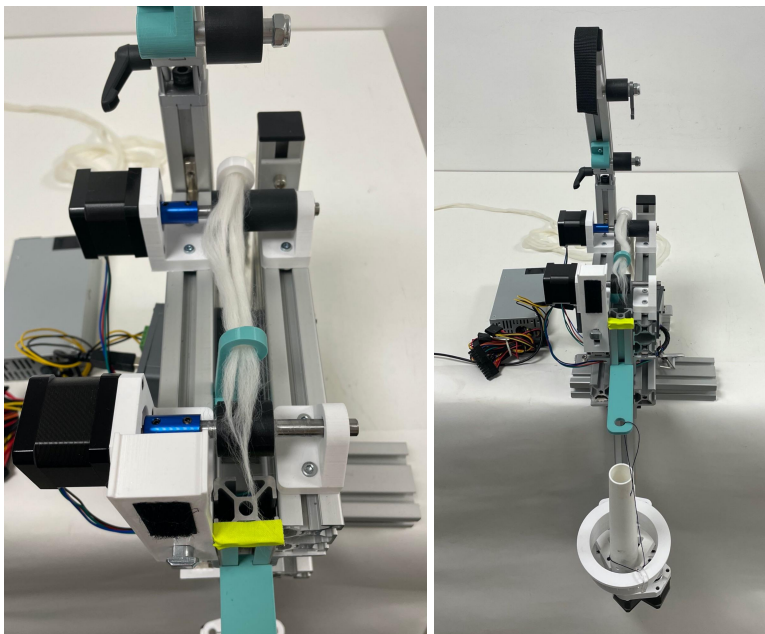

## 7. Put the thread and roving together.

Connect the thread coming from the hook with the roving and twist them a few times with your fingers.

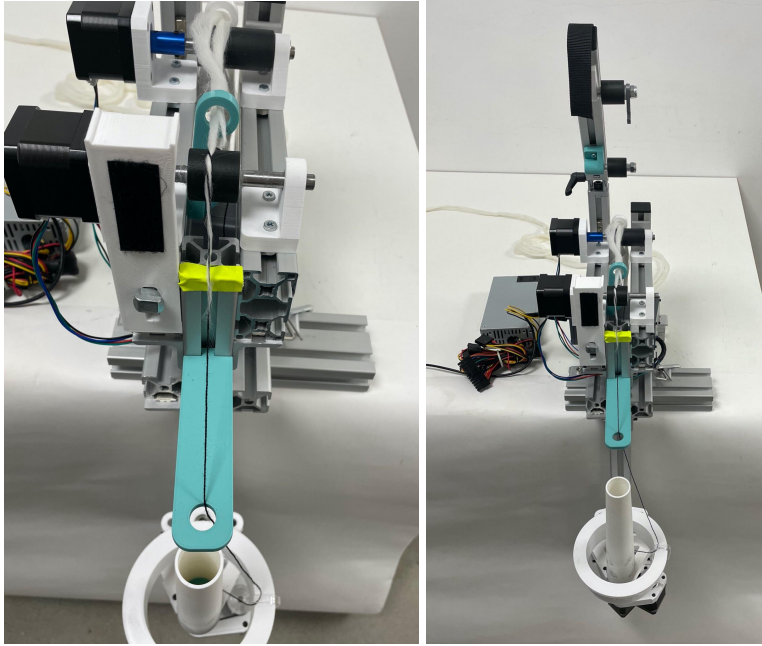

## 8. Close it.

Close the upper arm with the velcro. Make sure that the roving is between wheels.

