Game Boy: Complete Technical Reference

gekkio
`https://gekkio.fi`

August 23, 2025

Revision 176

Preface

> **ℹ Caveat**
>
> IMPORTANT: This document focuses at the moment on 1st and 2nd generation devices (models before the Game Boy Color), and some hardware details are very different in later generations.
>
> Be very careful if you make assumptions about later generation devices based on this document!

How to read this document

> **🧩 Speculation**
>
> This is something that hasn't been verified, but would make a lot of sense.

> **ⓘ Caveat**
>
> This explains some caveat about this documentation that you should know.

> **⚠ Warning**
>
> This is a warning about something.

0.1 Formatting of numbers

When a single bit is discussed in isolation, the value looks like this: `0`, `1`.

Binary numbers are prefixed with `0b` like this: `0b0101101`, `0b11011`, `0b00000000`. Values are prefixed with zeroes when necessary, so the total number of digits always matches the number of digits in the value.

Hexadecimal numbers are prefixed with `0x` like this: `0x1234`, `0xDEADBEEF`, `0xFF04`. Values are prefixed with zeroes when necessary, so the total number of characters always matches the number of nibbles in the value.

Examples:

	4-bit	8-bit	16-bit
Binary	`0b0101`	`0b10100101`	`0b0000101010100101`
Hexadecimal	`0x5`	`0xA5`	`0x0AA5`

0.2 Register definitions

Register 0.1: `0x1234` - This is a hardware register definition

R/W–0	R/W–1	U–1	R–0	R–1	R–x	W–1	U–0
VALUE<1:0>			BIGVAL<7:5>			FLAG	
bit 7	6	5	4	3	2	1	bit 0

Top row legend:

R   Bit can be read.

W   Bit can be written. If the bit cannot be read, reading returns a constant value defined in the bit list of the register in question.

U   Unimplemented bit. Writing has no effect, and reading returns a constant value defined in the bit list of the register in question.

-n   Value after system reset: `0`, `1`, or x.

1   Bit is set.

0   Bit is cleared.

x   Bit is unknown (e.g. depends on external things such as user input)

Middle row legend:

VALUE<1:0>	Bits 1 and 0 of VALUE
	Unimplemented bit
BIGVAL<7:5>	Bits 7, 6, 5 of BIGVAL
FLAG	Single-bit value FLAG

In this example:

• After system reset, VALUE is `0b01`, BIGVAL is either `0b010` or `0b011`, FLAG is `0b1`.
• Bits 5 and 0 are unimplemented. Bit 5 always returns `1`, and bit 0 always returns `0`.
• Both bits of VALUE can be read and written. When this register is written, bit 7 of the written value goes to bit 1 of VALUE.
• FLAG can only be written to, so reads return a value that is defined elsewhere.
• BIGVAL cannot be written to. Only bits 5-7 of BIGVAL are defined here, so look elsewhere for the low bits 0-4.

Contents

Part I

Game Boy console architecture

Chapter 1
Introduction

The original Game Boy and its successors were the most popular and financially successful handheld consoles in the 1990s and early 2000s with several millions units sold and a large catalogue of officially published games. Unlike many older consoles, Game Boys use only a single integrated System-on-a-Chip (SoC) for almost everything, and this SoC includes the processor (CPU) core, some memories, and various peripherals.

> **ⓘ Caveat**
>
> The Game Boy SoC is sometimes called the "CPU", even though it has a large amount of other peripherals as well. For example, the Game Boy Pocket SoC literally has the text "CPU MGB" on it, even though the CPU core takes only a small fraction of the entire chip area. This terminology is therefore misleading, and is like calling a computer mother-board and all connected expansion cards and storage devices the "CPU".
>
> This document always makes a clear distiction between the entire chip (SoC) and the processor inside it (the CPU *core*).

Most Game Boy consoles are handhelds, starting from the original Game Boy in 1989, ending with the Game Boy Micro in 2005. In addition to handheld devices, Game Boy SoCs are also used in some accessories meant for other consoles, such as the Super Game Boy for the SNES/SFC.

Game Boy consoles and their SoCs can be categorized based on three supported technical architectures:

- GB: the original Game Boy architecture with a Sharp SM83 CPU core and 4-level grayscale graphics
- GBC: a mostly backwards compatible extension to the GB architecture that adds color graphics and small improvements
- GBA: a completely different architecture based on the ARM processor instruction set and a completely redesigned set of peripherals. **This document does not cover GBA architecture, because it has little in common with GB/GBC**. GBA-based consoles and chips are only mentioned for their backwards compatibility with GB/GBC architectures.

Table 1.1 lists all officially released Game Boy consoles, including handhelds and accessories for other consoles. Every model has an internal codename, such as original Game Boy's codename Dot Matrix Game (DMG), that is also present on the mainboard.

> **ⓘ Caveat**
>
> This document refers to different console models usually by their unique codename to prevent confusion. For example, using the abbreviation GBP could refer to either Game Boy Pocket or Game Boy Player, but there's no confusion when MGB and GBS are used instead.
>
> In this document GBC refers to the technical architecture, while CGB refers to Game Boy Color consoles specifically. Likewise, GBA refers to the architecture and AGB to exactly one console model.

Console name	Codename	SoC type	GB	GBC	GBA
Handhelds					
Game Boy	DMG	DMG-CPU	✓		
Game Boy Pocket	MGB	CPU MGB	✓		
Game Boy Light	MGL	CPU MGB	✓		
Game Boy Color	CGB	CPU CGB	✓	✓	
Game Boy Advance	AGB	CPU AGB	✓	✓	✓
Game Boy Advance SP	AGS	CPU AGB	✓	✓	✓
Game Boy Micro	OXY	CPU AGB			✓
Accessories					
Super Game Boy	SGB	SGB-CPU	✓		
Super Game Boy 2	SGB2	CPU SGB2	✓		
Game Boy Player	GBS	CPU AGB	✓	✓	✓

Table 1.1: Summary of Game Boy consoles

Chapter 2
Clocks

2.1 System clock

The system oscillator is the primary clock source in a Game Boy system, and it generates the **system clock**. Almost all other clocks are derived from the system clock using prescalers / clock dividers, but there are some exceptions:

- If a Game Boy is set up to do a serial transfer in secondary mode, the serial data register is directly clocked using the serial clock signal coming from the link port. Two Game Boys connected with a link cable never have precisely the same clock phase and frequency relative to each other, so the serial clock of the primary side has no direct relation to the system clock of the secondary side.

- The inserted game cartridge may use other clock(s) internally. A typical example in some official games is the Real Time Clock (RTC), which is based on a 32.768 kHz oscillator and a clock-domain crossing circuit so that RTC data can be read using the cartridge bus while the RTC circuit is ticking independently using its own clock.

The Game Boy SoC uses two pins for the system oscillator: XI and XO. These pins along with some external components can be used to form a Pierce oscillator circuit. Alternatively, the XI pin can be driven directly with a clock signal originating from somewhere else, and the XO pin can be left unconnected.

System clock frequency

In DMG and MGB consoles the system oscillator circuit uses an external quartz crystal with a nominal frequency of **4.194304 MHz** (= 2^{22} MHz = 4 MiHz) to form a Pierce oscillator circuit. This frequency is considered to be the standard frequency of a Game Boy.

In SGB the system oscillator input is directly driven by the ICD2 chip on the SGB cartridge. The clock is derived via /5 division of the main SNES / SFC clock, which has a different frequency depending on the console region (21.447 MHz NTSC, 21.281 MHz PAL). The SNES / SFC clock does not divide into 4.194304 MHz with integer division, so the clock seen by the SGB SoC is not the same as in DMG and MGB consoles. The frequency is higher, so everything is sped up by a small amount and audio has a slightly higher pitch.

In SGB2, just like SGB, the system oscillator input is driven by the ICD2 chip, but instead of using the SNES / SFC clock, the ICD2 chip is driven by a Pierce oscillator circuit with a 20.971520 MHz crystal. ICD2 then divides this frequency by /5 to obtain the final frequency seen by the SGB2 SoC, which is 4.194304 MHz that matches the standard DMG / MGB frequency.

2.2 Clock periods, T-cycles, and M-cycles

In digital logic, a clock switches between low and high states and every transition happens on a *clock edge*, which might be a rising edge (low → high transition) or a falling edge (high → low transition). A single *clock period* is measured between two edges of the same type, so that the clock goes through two opposing edges and returns to its original state after the clock period. The typical convention is that a clock period consists of a rising edge and a falling edge.

In addition to the system clock and other clocks derived from it, Game Boy systems also use *inverted clocks* in some peripherals, which means the rising edge of an inverted clock may happen at the same time as a falling edge of the original clock. Figure 2.1 shows two clock

periods of the system clock and an inverted clock derived from it, and how they are out of phase due to clock inversion.

period ┊ period

CLK 4 MiHz

Inverted 4 MiHz

also ┊ also
a period ┊ a period
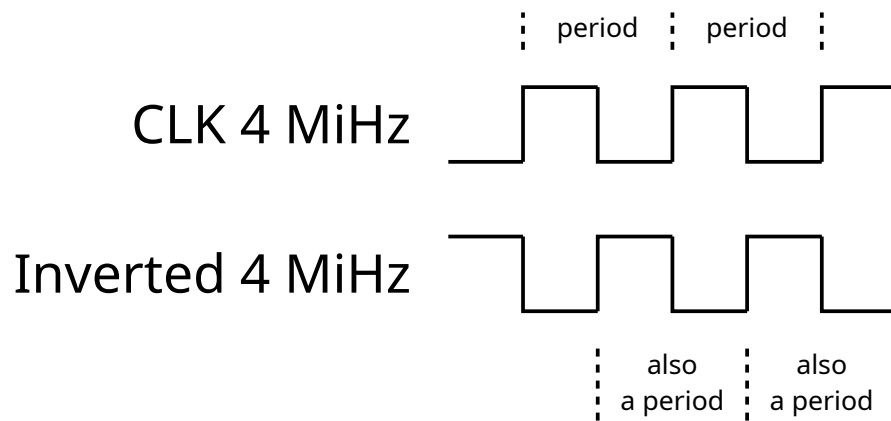
Figure 2.1: Example clock periods

T1R **T1F** **T2R** **T2F** **T3R** **T3F** **T4R** **T4F**

CLK 4 MiHz T1 | T1 | T2 | T2 | T3 | T3 | T4 | T4

PHI 1 MiHz
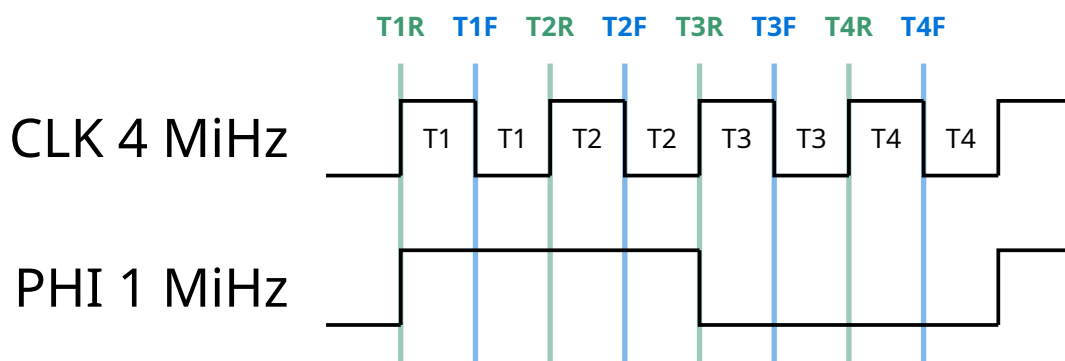
Figure 2.2: Clock edges in a machine cycle

Part II

Sharp SM83 CPU core

Chapter 3
Introduction

The CPU core in the Game Boy SoC is a custom Sharp design that hasn't publicly been given a name by either Sharp or Nintendo. However, using old Sharp datasheets and databooks as evidence, the core has been identified to be a Sharp **SM83** CPU core, or at least something that is 100% compatible with it. SM83 is a custom CPU core used in some custom Application Specific Integrated Chips (ASICs) manufactured by Sharp in the 1980s and 1990s.

> ❗ **Warning**
>
> Some sources claim Game Boy uses a "modified" Zilog Z80 or Intel 8080 CPU core. While the SM83 resembles both and has many identical instructions, it can't execute all Z80/8080 programs, and finer details such as timing of instructions often differ.

SM83 is an 8-bit CPU core with a 16-bit address bus. The Instruction Set Architecture (ISA) is based on both Z80 and 8080, and is close enough to Z80 that programmers familiar with Z80 assembly can quickly become productive with SM83 as well. Some Z80 programs may also work directly on SM83, assuming only opcodes supported by both are used and the program is not sensitive to timing differences.

> 🧩 **Speculation**
>
> Sharp most likely designed SM83 to closely resemble Z80, so it would be easy for programmers already familiar with the widely popular Z80 to write programs for it. However, SM83 is not a "modified Z80" because the internal implementation is completely different. At the time Sharp also manufactured real Z80 chips such as LH0080 under a license from Zilog, so they were familiar with Z80 internals but did not directly copy the actual implementation of the CPU core. If you compare photos of a decapped Z80 chip and a GB SoC, you will see two very different-looking CPU cores.

3.1 History

The first known mention of the SM83 CPU core is in Sharp Microcomputers Data Book (1990), where it is listed as the CPU core used in the SM8320 8-bit microcomputer chip, intended for inverter air conditioners [1]. The data book describes some details of the CPU core, such as a high-level overview of the supported instructions, but precise details such as full opcode tables are not included. Another CPU core called SM82 is also mentioned, but based on the details it's clearly a completely different one.

The SM83 CPU core later appeared in Sharp Microcomputer Data Book (1996), where it is listed as the CPU core in the SM8311/SM8313/SM8314/SM8315 8-bit microcomputer chips, meant for home appliances [2]. This data book describes the CPU core in much more detailed manner, and other than some mistakes in the descriptions, the details seem to match what is known about the GB SoC CPU core from other sources.

Chapter 4
Simple model
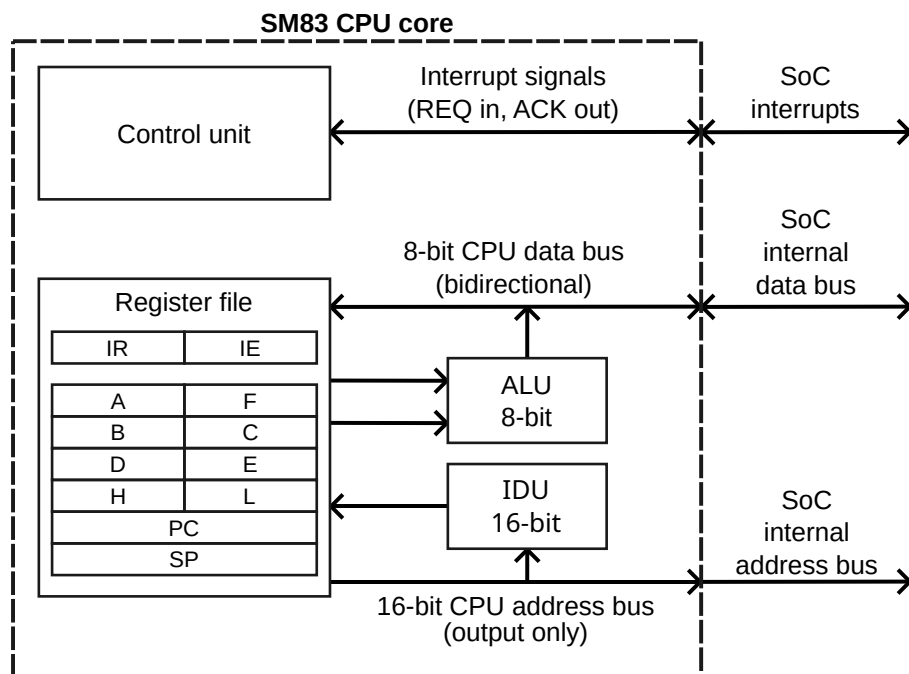
Figure 4.3: Simple model of the SM83 CPU core

Figure 4.3 shows a simplified model of the SM83 CPU core. The core interacts with the rest of the SoC using interrupt signals, an 8-bit bidirectional data bus, and a 16-bit address bus controlled by the CPU core.

The main subsystems of the CPU core are as follows:

Control unit   The control unit decodes the executed instructions and generates control signals for the rest of the CPU core. It is also responsible for checking and dispatching interrupts.

Register file   The register file holds most of the state of the CPU inside registers. It contains the 16-bit Program Counter (PC), the 16-bit Stack Pointer (SP), the 8-bit Accumulator (A), the Flags register (F), general-purpose register pairs consisting of two 8-bit halves such as BC, DE, HL, and the special-purpose 8-bit registers Instruction Register (IR) and Interrupt Enable (IE).

ALU   An 8-bit Arithmetic Logic Unit (ALU) has two 8-bit input ports and is capable of performing various calculations. The ALU outputs its result either to the register file or the CPU data bus.

IDU   A dedicated 16-bit Increment/Decrement Unit (IDU) is capable of performing only simple increment/decrement operations on the 16-bit address bus value, but they can be performed independently of the ALU, improving maximum performance of the CPU core. The IDU always outputs its result back to the register file, where it can be written to a register pair or a 16-bit register.

Chapter 5
CPU core timing

5.1 Fetch/execute overlap

Sharp SM83 uses a microprocessor design technique known as *fetch/execute overlap* to improve CPU performance by doing opcode fetches in parallel with instruction execution whenever possible. Since the CPU can only perform one memory access per M-cycle, it is worth it to try to do memory operations as soon as possible. Also, when doing a memory read, the CPU cannot use the data during the same M-cycle so the true minimum effective duration of instructions is 2 machine cycles, not 1 machine cycle.

Every instruction needs one machine cycle for the fetch stage, and at least one machine cycle for the decode/execute stage. However, the fetch stage of an instruction always overlaps with the last machine cycle of the execute stage of the previous instruction. The overlapping execute stage cycle may still do some work (e.g. ALU operation and/or register writeback) but memory access is reserved for the fetch stage of the next instruction.

Since all instructions effectively last one machine cycle longer, fetch/execute overlap is usually ignored in documentation intended for programmers. It is much easier to think of a program as a sequence of non-overlapping instructions and consider only the execute stages when calculating instruction durations. However, when emulating a SM83 CPU core, understanding and emulating the overlap can be useful.

> **⊘ Warning**
>
> Sharp SM831x is a family of single-chip SoCs from Sharp that use the SM83 CPU core, and their datasheet [3] includes a description of fetch/execute overlap. However, the description is not completely correct and can in fact be misleading.
>
> For example, the timing diagram includes an instruction that does not involve opcode fetch at all, and memory operations for two instructions are shown to happen at the same time, which is not possible.

Fetch/execute overlap timing example

Let's assume the CPU is executing a program that starts from the address `0x1000` and contains the following instructions:

0x1000	`INC A`
0x1001	`LDH (n), A`
0x1003	`RST 0x08`
0x0008	`NOP`

The following timing diagram shows all memory operations done by the CPU, and the fetch and execute stages of each instruction:
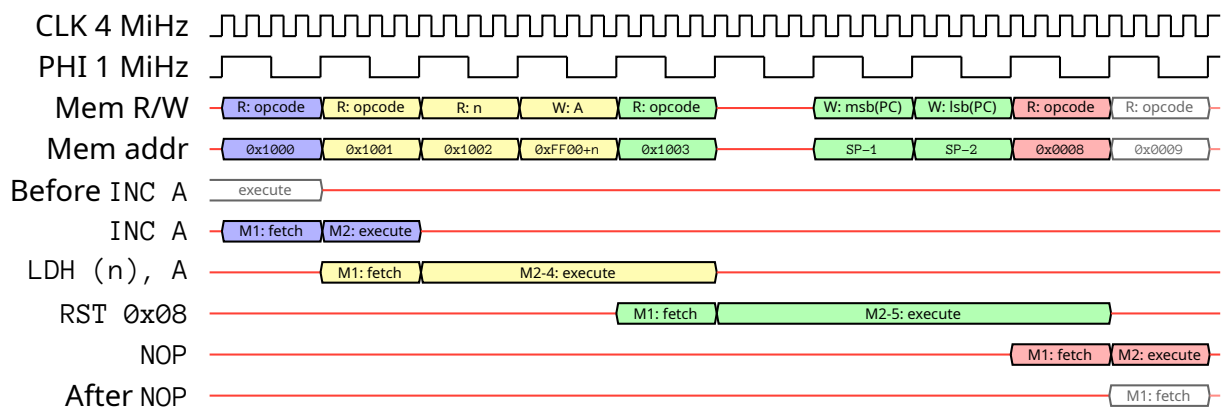
Figure 5.4: Fetch/execute overlap example

Chapter 6
Sharp SM83 instruction set

6.1 Overview

CB opcode prefix

Undefined opcodes

6.2 8-bit load instructions

LD r, r': Load register (register)

Load to the 8-bit register `r`, data from the 8-bit register `r'`.

Opcode 0b01xxxyyy/various   **Duration** 1 machine cycle
Length 1 byte: opcode   **Flags** -
Simple timing and pseudocode

```
M-cycle    —⟨___M1___⟩—
Mem R/W    —⟨_opcode_⟩—
```

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0x41: # example: LD B, C
  B = C
```

Detailed timing and pseudocode

```
M-cycle   —⟨___M1___⟩⟨__M2/M1__⟩—
Addr bus  —⟨_Previous_⟩⟨___PC___⟩—
Data bus  —⟨_IR←mem_⟩⟨_IR←mem_⟩—
IDU op    —⟨_Previous_⟩⟨_PC←PC+1_⟩—
ALU op    —⟨_Previous_⟩⟨__r←r'__⟩—
Misc op   —⟨_Previous_⟩▓▓▓▓▓▓▓—
```
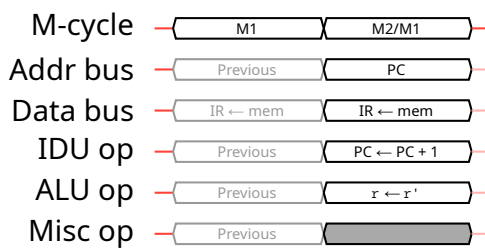
```
# M2/M1
if IR == 0x41: # example: LD B, C
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1; B = C
```

LD r, n: Load register (immediate)

Load to the 8-bit register r, the immediate data n.

Opcode 0b00xxx110/various   **Duration** 2 machine cycles
Length 2 bytes: opcode + n   **Flags** -

Simple timing and pseudocode


```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0x06: # example: LD B, n
  B = read_memory(addr=PC); PC = PC + 1
```

Detailed timing and pseudocode
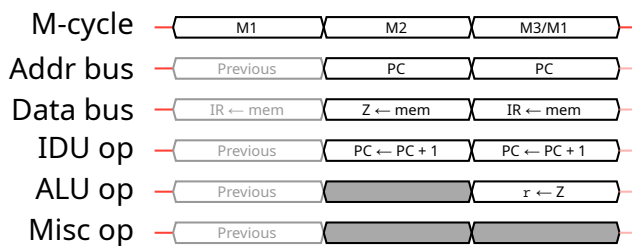

```
# M2
if IR == 0x06: # example: LD B, n
  Z = read_memory(addr=PC); PC = PC + 1
  # M3/M1
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1; B = Z
```

LD r, (HL): Load register (indirect HL)

Load to the 8-bit register r, data from the absolute address specified by the 16-bit register HL.

Opcode 0b01xxx110/various   **Duration** 2 machine cycles
Length 1 byte: opcode   **Flags** -

Simple timing and pseudocode

M-cycle   M1   M2

Mem R/W   opcode   R: data

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0x46: # example: LD B, (HL)
  B = read_memory(addr=HL)
```

Detailed timing and pseudocode

M-cycle   M1   M2   M3/M1

Addr bus   Previous   HL   PC

Data bus   IR ← mem   Z ← mem   IR ← mem

IDU op   Previous   PC ← PC + 1

ALU op   Previous   r ← Z

Misc op   Previous

```
# M2
if IR == 0x46: # example: LD B, (HL)
  Z = read_memory(addr=HL)
  # M3/M1
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1; B = Z
```

LD (HL), r: Load from register (indirect HL)

Load to the absolute address specified by the 16-bit register HL, data from the 8-bit register `r`.

Opcode 0b01110xxx/various   **Duration** 2 machine cycles
Length 1 byte: opcode   **Flags** -

Simple timing and pseudocode


```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0x70: # example: LD (HL), B
  write_memory(addr=HL, data=B)
```

Detailed timing and pseudocode


```
# M2
if IR == 0x70: # example: LD (HL), B
  write_memory(addr=HL, data=B)
  # M3/M1
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

LD (HL), n: Load from immediate data (indirect HL)

Load to the absolute address specified by the 16-bit register HL, the immediate data n.

Opcode 0b00110110/0x36   **Duration** 3 machine cycles
Length 2 bytes: opcode + n   **Flags** -

Simple timing and pseudocode

M-cycle	M1	M2	M3
Mem R/W	opcode	R: n	W: n

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0x36:
  n = read_memory(addr=PC); PC = PC + 1
  write_memory(addr=HL, data=n)
```

Detailed timing and pseudocode

M-cycle	M1	M2	M3	M4/M1
Addr bus	Previous	PC	HL	PC
Data bus	IR ← mem	Z ← mem	mem ← Z	IR ← mem
IDU op	Previous	PC ← PC + 1		PC ← PC + 1
ALU op	Previous			
Misc op	Previous			
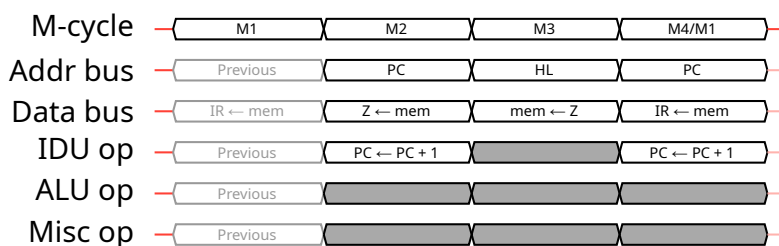
```
# M2
if IR == 0x36:
  Z = read_memory(addr=PC); PC = PC + 1
  # M3
  write_memory(addr=HL, data=Z)
  # M4/M1
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

LD A, (BC): Load accumulator (indirect BC)

Load to the 8-bit A register, data from the absolute address specified by the 16-bit register BC.

Opcode 0b00001010/0x0A   **Duration** 2 machine cycles
Length 1 byte: opcode   **Flags** -

Simple timing and pseudocode

M-cycle ─< M1 >< M2 >─
Mem R/W ─< opcode >< R: data >─

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0x0A:
  A = read_memory(addr=BC)
```

Detailed timing and pseudocode

M-cycle ─< M1 >< M2 >< M3/M1 >─
Addr bus ─< Previous >< BC >< PC >─
Data bus ─< IR ← mem >< Z ← mem >< IR ← mem >─
IDU op ─< Previous >< >< PC ← PC + 1 >─
ALU op ─< Previous >< >< A ← Z >─
Misc op ─< Previous >< >< >─

```
# M2
if IR == 0x0A:
  Z = read_memory(addr=BC)
  # M3/M1
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1; A = Z
```

LD A, (DE): Load accumulator (indirect DE)

Load to the 8-bit A register, data from the absolute address specified by the 16-bit register DE.

**Opcode** 0b00011010/0x1A   **Duration** 2 machine cycles
Length 1 byte: opcode   **Flags** -

Simple timing and pseudocode


```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0x1A:
  A = read_memory(addr=DE)
```

Detailed timing and pseudocode


```
# M2
if IR == 0x1A:
  Z = read_memory(addr=DE)
  # M3/M1
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1; A = Z
```

LD (BC), A: Load from accumulator (indirect BC)

Load to the absolute address specified by the 16-bit register BC, data from the 8-bit A register.

Opcode 0b00000010/0x02   **Duration** 2 machine cycles
Length 1 byte: opcode   **Flags** -

Simple timing and pseudocode

M-cycle   M1   M2
Mem R/W   opcode   W: data

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0x02:
  write_memory(addr=BC, data=A)
```

Detailed timing and pseudocode

M-cycle   M1   M2   M3/M1
Addr bus   Previous   BC   PC
Data bus   IR ← mem   mem ← A   IR ← mem
IDU op   Previous   PC ← PC + 1
ALU op   Previous
Misc op   Previous
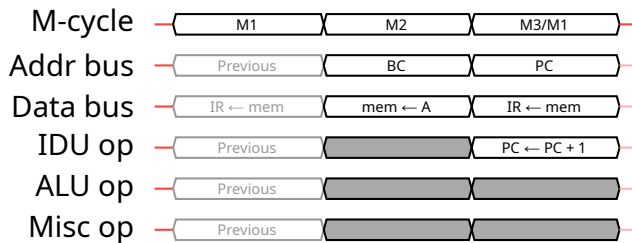
```
# M2
if IR == 0x02:
  write_memory(addr=BC, data=A)
  # M3/M1
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

LD (DE), A: Load from accumulator (indirect DE)

Load to the absolute address specified by the 16-bit register DE, data from the 8-bit A register.

Opcode 0b00010010/0x12   **Duration** 2 machine cycles
Length 1 byte: opcode   **Flags**   -

Simple timing and pseudocode


```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0x12:
  write_memory(addr=DE, data=A)
```

Detailed timing and pseudocode
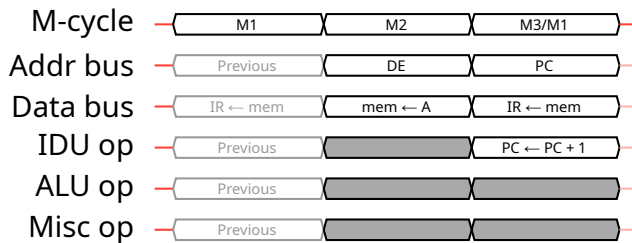

```
# M2
if IR == 0x12:
  write_memory(addr=DE, data=A)
  # M3/M1
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

LD A, (nn): Load accumulator (direct)

Load to the 8-bit A register, data from the absolute address specified by the 16-bit operand nn.

Opcode 0b11111010/0xFA   **Duration** 4 machine cycles
Length 3 bytes: opcode + LSB(nn) + MSB(nn) **Flags**   -

Simple timing and pseudocode

M-cycle	M1	M2	M3	M4
Mem R/W	opcode	R: lsb nn	R: msb nn	R: data

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xFA:
  nn_lsb = read_memory(addr=PC); PC = PC + 1
  nn_msb = read_memory(addr=PC); PC = PC + 1
  nn = unsigned_16(lsb=nn_lsb, msb=nn_msb)
  A = read_memory(addr=nn)
```

Detailed timing and pseudocode

M-cycle	M1	M2	M3	M4	M5/M1
Addr bus	Previous	PC	PC	WZ	PC
Data bus	IR ← mem	Z ← mem	W ← mem	Z ← mem	IR ← mem
IDU op	Previous	PC ← PC + 1	PC ← PC + 1		PC ← PC + 1
ALU op	Previous				A ← Z
Misc op	Previous				
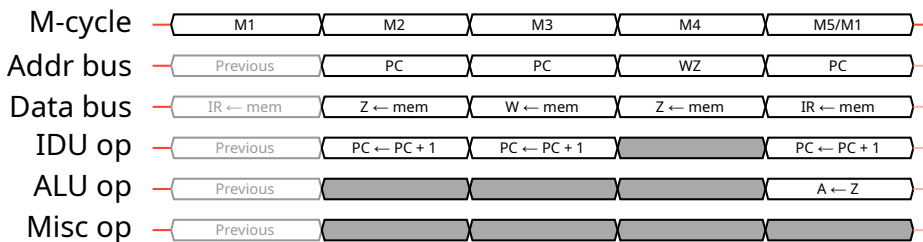
```
# M2
if IR == 0xFA:
  Z = read_memory(addr=PC); PC = PC + 1
  # M3
  W = read_memory(addr=PC); PC = PC + 1
  # M4
  Z = read_memory(addr=WZ)
  # M5/M1
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1; A = Z
```

LD (nn), A: Load from accumulator (direct)

Load to the absolute address specified by the 16-bit operand nn, data from the 8-bit A register.

Opcode 0b11101010/0xEA   **Duration** 4 machine cycles
Length 3 bytes: opcode + LSB(nn) + MSB(nn) **Flags**   -

Simple timing and pseudocode

M-cycle	M1	M2	M3	M4
Mem R/W	opcode	R: lsb nn	R: msb nn	W: data

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xEA:
  nn_lsb = read_memory(addr=PC); PC = PC + 1
  nn_msb = read_memory(addr=PC); PC = PC + 1
  nn = unsigned_16(lsb=nn_lsb, msb=nn_msb)
  write_memory(addr=nn, data=A)
```

Detailed timing and pseudocode

M-cycle	M1	M2	M3	M4	M5/M1
Addr bus	Previous	PC	PC	WZ	PC
Data bus	IR ← mem	Z ← mem	W ← mem	mem ← A	IR ← mem
IDU op	Previous	PC ← PC + 1	PC ← PC + 1		PC ← PC + 1
ALU op	Previous				
Misc op	Previous				

```
# M2
if IR == 0xEA:
  Z = read_memory(addr=PC); PC = PC + 1
  # M3
  W = read_memory(addr=PC); PC = PC + 1
  # M4
  write_memory(addr=WZ, data=A)
  # M5/M1
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

LDH A, (C): Load accumulator (indirect `0xFF00+C`)

Load to the 8-bit A register, data from the address specified by the 8-bit C register. The full 16-bit absolute address is obtained by setting the most significant byte to `0xFF` and the least significant byte to the value of C, so the possible range is `0xFF00–0xFFFF`.

Opcode 0b11110010/0xF2   **Duration** 2 machine cycles
Length 1 byte: opcode   **Flags** -

Simple timing and pseudocode

M-cycle ─┤ M1 │ M2 ├─
Mem R/W ─┤ opcode │ R: data ├─

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xF2:
  A = read_memory(addr=unsigned_16(lsb=C, msb=0xFF))
```

Detailed timing and pseudocode

M-cycle ─┤ M1 │ M2 │ M3/M1 ├─
Addr bus ─┤ Previous │ 0xFF00+C │ PC ├─
Data bus ─┤ IR ← mem │ Z ← mem │ IR ← mem ├─
IDU op ─┤ Previous │ │ PC ← PC + 1 ├─
ALU op ─┤ Previous │ │ A ← Z ├─
Misc op ─┤ Previous │ │ ├─

```
# M2
if IR == 0xF2:
  Z = read_memory(addr=unsigned_16(lsb=C, msb=0xFF))
  # M3/M1
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1; A = Z
```

LDH (C), A: Load from accumulator (indirect `0xFF00+C`)

Load to the address specified by the 8-bit C register, data from the 8-bit A register. The full 16-bit absolute address is obtained by setting the most significant byte to `0xFF` and the least significant byte to the value of C, so the possible range is `0xFF00–0xFFFF`.

Opcode 0b11100010/0xE2   **Duration** 2 machine cycles
Length 1 byte: opcode   **Flags** -

Simple timing and pseudocode

M-cycle	M1	M2
Mem R/W	opcode	W: data

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xE2:
  write_memory(addr=unsigned_16(lsb=C, msb=0xFF), data=A)
```

Detailed timing and pseudocode

M-cycle	M1	M2	M3/M1
Addr bus	Previous	0xFF00+C	PC
Data bus	IR ← mem	mem ← A	IR ← mem
IDU op	Previous		PC ← PC + 1
ALU op	Previous		
Misc op	Previous		

```
# M2
if IR == 0xE2:
  write_memory(addr=unsigned_16(lsb=C, msb=0xFF), data=A)
  # M3/M1
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

LDH A, (n): Load accumulator (direct `0xFF00+n`)

Load to the 8-bit A register, data from the address specified by the 8-bit immediate data `n`. The full 16-bit absolute address is obtained by setting the most significant byte to `0xFF` and the least significant byte to the value of `n`, so the possible range is `0xFF00–0xFFFF`.

Opcode 0b11110000/0xF0   **Duration** 3 machine cycles
Length 2 bytes: opcode + n   **Flags**   -
Simple timing and pseudocode

M-cycle	M1	M2	M3
Mem R/W	opcode	R: n	R: data

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xF0:
  n = read_memory(addr=PC); PC = PC + 1
  A = read_memory(addr=unsigned_16(lsb=n, msb=0xFF))
```

Detailed timing and pseudocode

M-cycle	M1	M2	M3	M4/M1
Addr bus	Previous	PC	0xFF00+Z	PC
Data bus	IR ← mem	Z ← mem	Z ← mem	IR ← mem
IDU op	Previous	PC ← PC + 1		PC ← PC + 1
ALU op	Previous			A ← Z
Misc op	Previous			
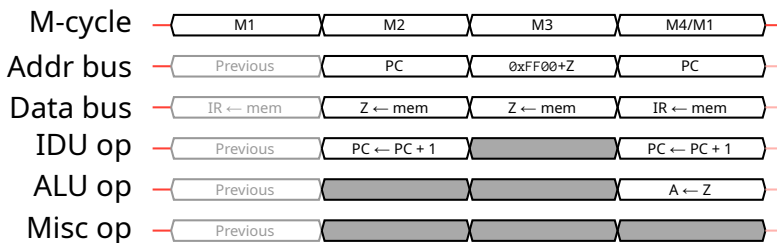
```
# M2
if IR == 0xF0:
  Z = read_memory(addr=PC); PC = PC + 1
  # M3
  Z = read_memory(addr=unsigned_16(lsb=Z, msb=0xFF))
  # M4/M1
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1; A = Z
```

LDH (n), A: Load from accumulator (direct `0xFF00+n`)

Load to the address specified by the 8-bit immediate data `n`, data from the 8-bit A register. The full 16-bit absolute address is obtained by setting the most significant byte to `0xFF` and the least significant byte to the value of `n`, so the possible range is `0xFF00–0xFFFF`.

Opcode `0b11100000/0xE0`   **Duration** 3 machine cycles
Length 2 bytes: opcode + `n`   **Flags** -

Simple timing and pseudocode

M-cycle	M1	M2	M3
Mem R/W	opcode	R: n	W: data

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xE0:
  n = read_memory(addr=PC); PC = PC + 1
  write_memory(addr=unsigned_16(lsb=n, msb=0xFF), data=A)
```

Detailed timing and pseudocode

M-cycle	M1	M2	M3	M4/M1
Addr bus	Previous	PC	0xFF00+Z	PC
Data bus	IR ← mem	Z ← mem	mem ← A	IR ← mem
IDU op	Previous	PC ← PC + 1		PC ← PC + 1
ALU op	Previous			
Misc op	Previous			
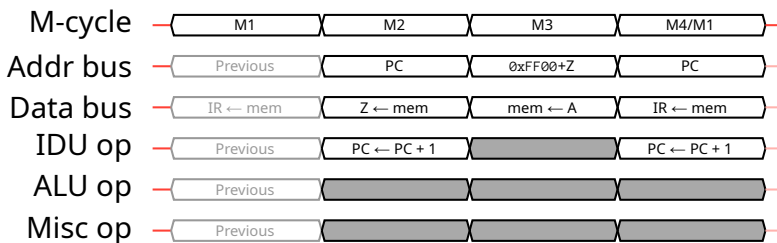
```
# M2
if IR == 0xE0:
  Z = read_memory(addr=PC); PC = PC + 1
  # M3
  write_memory(addr=unsigned_16(lsb=Z, msb=0xFF), data=A)
  # M4/M1
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

LD A, (HL-): Load accumulator (indirect HL, decrement)

Load to the 8-bit A register, data from the absolute address specified by the 16-bit register HL. The value of HL is decremented after the memory read.

Opcode 0b00111010/0x3A   **Duration** 2 machine cycles
Length 1 byte: opcode   **Flags** -

Simple timing and pseudocode

M-cycle	M1	M2
Mem R/W	opcode	R: data

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0x3A:
  A = read_memory(addr=HL); HL = HL − 1
```

Detailed timing and pseudocode

M-cycle	M1	M2	M3/M1
Addr bus	Previous	HL	PC
Data bus	IR ← mem	Z ← mem	IR ← mem
IDU op	Previous	HL ← HL - 1	PC ← PC + 1
ALU op	Previous		A ← Z
Misc op	Previous		
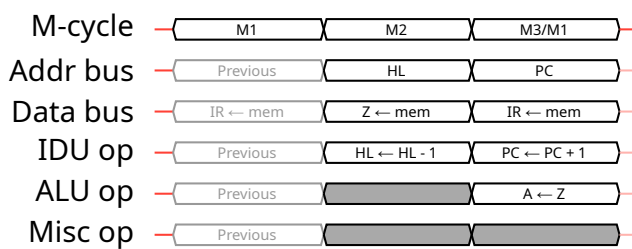
```
# M2
if IR == 0x3A:
  Z = read_memory(addr=HL); HL = HL − 1
  # M3/M1
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1; A = Z
```

LD (HL-), A: Load from accumulator (indirect HL, decrement)

Load to the absolute address specified by the 16-bit register HL, data from the 8-bit A register. The value of HL is decremented after the memory write.

Opcode 0b00110010/0x32   **Duration** 2 machine cycles
Length 1 byte: opcode   **Flags** -

Simple timing and pseudocode


```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0x32:
  write_memory(addr=HL, data=A); HL = HL − 1
```
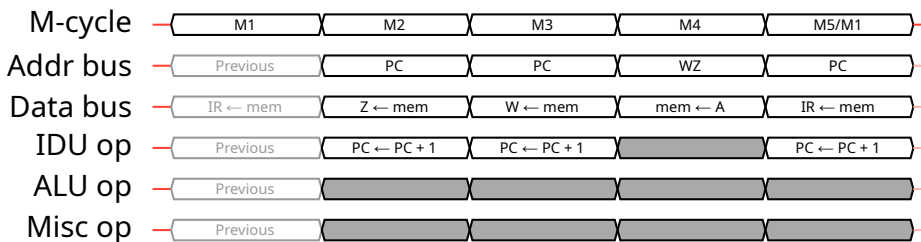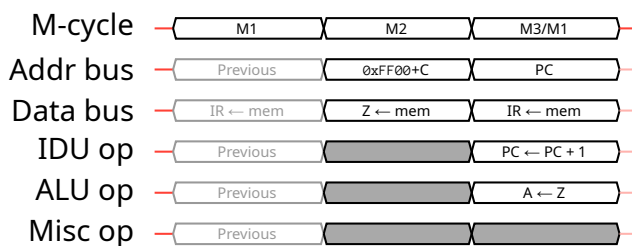
Detailed timing and pseudocode
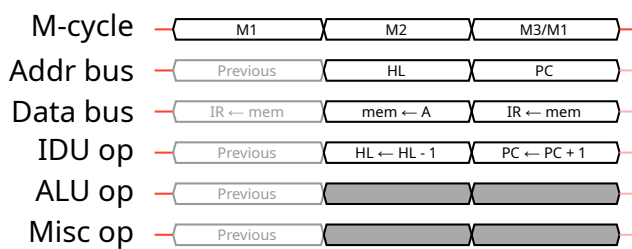

```
# M2
if IR == 0x32:
  write_memory(addr=HL, data=A); HL = HL − 1
  # M3/M1
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

LD A, (HL+): Load accumulator (indirect HL, increment)

Load to the 8-bit A register, data from the absolute address specified by the 16-bit register HL. The value of HL is incremented after the memory read.

Opcode 0b00101010/0x2A   **Duration** 2 machine cycles
Length 1 byte: opcode   **Flags** -

Simple timing and pseudocode

M-cycle   M1   M2
Mem R/W   opcode   R: data

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0x2A:
  A = read_memory(addr=HL); HL = HL + 1
```

Detailed timing and pseudocode

M-cycle   M1   M2   M3/M1
Addr bus   Previous   HL   PC
Data bus   IR ← mem   Z ← mem   IR ← mem
IDU op   Previous   HL ← HL + 1   PC ← PC + 1
ALU op   Previous   A ← Z
Misc op   Previous
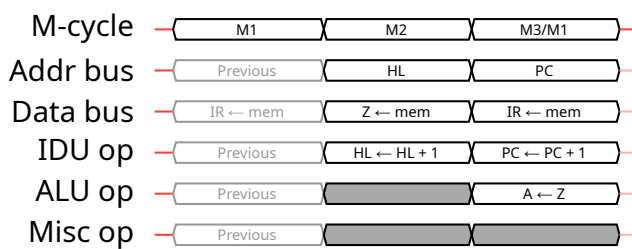
```
# M2
if IR == 0x2A:
  Z = read_memory(addr=HL); HL = HL + 1
  # M3/M1
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1; A = Z
```

LD (HL+), A: Load from accumulator (indirect HL, increment)

Load to the absolute address specified by the 16-bit register HL, data from the 8-bit A register. The value of HL is incremented after the memory write.

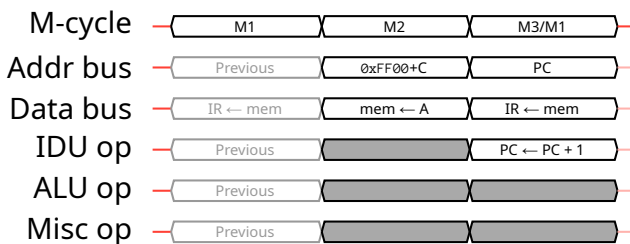**Opcode** 0b00100010/0x22   **Duration** 2 machine cycles
Length 1 byte: opcode   **Flags**   -

Simple timing and pseudocode


```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0x22:
  write_memory(addr=HL, data=A); HL = HL + 1
```

Detailed timing and pseudocode
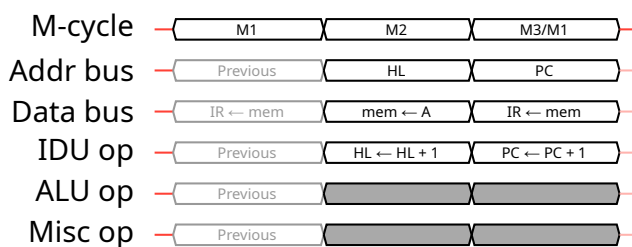

```
# M2
if IR == 0x22:
  write_memory(addr=HL, data=A); HL = HL + 1
  # M3/M1
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

6.3 16-bit load instructions

LD rr, nn: Load 16-bit register / register pair

Load to the 16-bit register `rr`, the immediate 16-bit data `nn`.

Opcode 0b00xx0001 /various   **Duration** 3 machine cycles
Length 3 bytes: opcode + LSB(nn) + MSB(nn)   **Flags** -
Simple timing and pseudocode


```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0x01: # example: LD BC, nn
  nn_lsb = read_memory(addr=PC); PC = PC + 1
  nn_msb = read_memory(addr=PC); PC = PC + 1
  nn = unsigned_16(lsb=nn_lsb, msb=nn_msb)
  BC = nn
```

Detailed timing and pseudocode
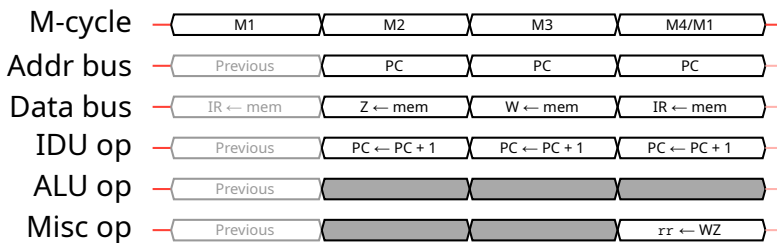

```
# M2
if IR == 0x01: # example: LD BC, nn
  Z = read_memory(addr=PC); PC = PC + 1
  # M3
  W = read_memory(addr=PC); PC = PC + 1
  # M4/M1
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1; BC = WZ
```

LD (nn), SP: Load from stack pointer (direct)

Load to the absolute address specified by the 16-bit operand nn, data from the 16-bit SP register.

Opcode 0b00001000/0x08   **Duration** 5 machine cycles
Length 3 bytes: opcode + LSB(nn) + MSB(nn)   **Flags**   -

Simple timing and pseudocode

M-cycle	M1	M2	M3	M4	M5
Mem R/W	opcode	R: Z	R: W	W: SPH	W: SPL

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0x08:
  nn_lsb = read_memory(addr=PC); PC = PC + 1
  nn_msb = read_memory(addr=PC); PC = PC + 1
  nn = unsigned_16(lsb=nn_lsb, msb=nn_msb)
  write_memory(addr=nn, data=lsb(SP)); nn = nn + 1
  write_memory(addr=nn, data=msb(SP))
```

Detailed timing and pseudocode

M-cycle	M1	M2	M3	M4	M5	M6/M1
Addr bus	Previous	PC	PC	WZ	WZ	PC
Data bus	IR ← mem	Z ← mem	W ← mem	mem ← SPL	mem ← SPH	IR ← mem
IDU op	Previous	PC ← PC + 1	PC ← PC + 1	WZ ← WZ + 1		PC ← PC + 1
ALU op	Previous					
Misc op	Previous					
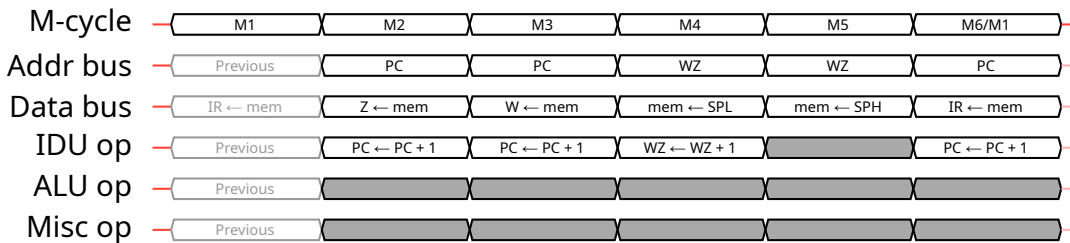
```
# M2
if IR == 0x08:
  Z = read_memory(addr=PC); PC = PC + 1
  # M3
  W = read_memory(addr=PC); PC = PC + 1
  # M4
  write_memory(addr=WZ, data=lsb(SP)); WZ = WZ + 1
  # M5
  write_memory(addr=WZ, data=msb(SP))
  # M6/M1
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

LD SP, HL: Load stack pointer from HL

Load to the 16-bit SP register, data from the 16-bit HL register.

Opcode 0b11111001/0xF9   **Duration** 2 machine cycles
**Length** 1 byte: opcode   **Flags** -

Simple timing and pseudocode



```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xF9:
  SP = HL
```

Detailed timing and pseudocode
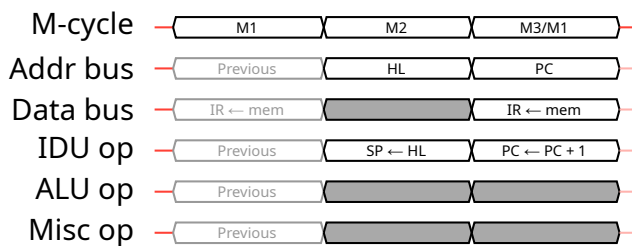

```
# M2
if IR == 0xF9:
  SP = HL
  # M3/M1
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

PUSH rr: Push to stack

Push to the stack memory, data from the 16-bit register `rr`.

Opcode `0b11xx0101`/various   **Duration** 4 machine cycles
Length 1 byte: opcode   **Flags** -

Simple timing and pseudocode

M-cycle	M1	M2	M3	M4
Mem R/W	opcode		W: msb rr	W: lsb rr

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xC5: # example: PUSH BC
  SP = SP - 1
  write_memory(addr=SP, data=msb(BC)); SP = SP - 1
  write_memory(addr=SP, data=lsb(BC))
```

Detailed timing and pseudocode

M-cycle	M1	M2	M3	M4	M5/M1
Addr bus	Previous	SP	SP	SP	PC
Data bus	IR ← mem		mem ← msb rr	mem ← lsb rr	IR ← mem
IDU op	Previous	SP ← SP - 1	SP ← SP - 1	SP ← SP	PC ← PC + 1
ALU op	Previous				
Misc op	Previous				
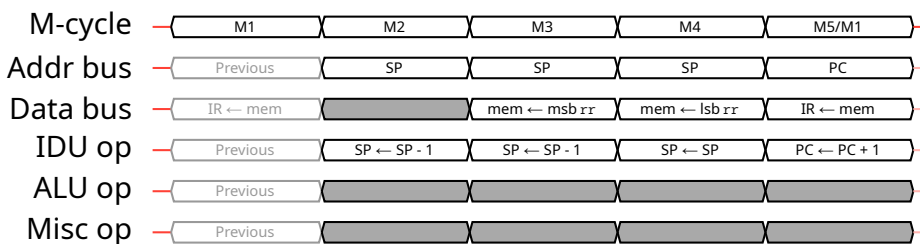
```
# M2
if IR == 0xC5: # example: PUSH BC
  SP = SP - 1
  # M3
  write_memory(addr=SP, data=msb(BC)); SP = SP - 1
  # M4
  write_memory(addr=SP, data=lsb(BC))
  # M5/M1
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

POP rr: Pop from stack

Pops to the 16-bit register `rr`, data from the stack memory.

This instruction does not do calculations that affect flags, but POP AF completely replaces the F register value, so all flags are changed based on the 8-bit data that is read from memory.

Opcode `0b11xx0001`/various   **Duration** 3 machine cycles
Length 1 byte: opcode   **Flags** See the instruction description

Simple timing and pseudocode

M-cycle	M1	M2	M3
Mem R/W	opcode	R: lsb `rr`	R: msb `rr`

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xC1: # example: POP BC
  lsb = read_memory(addr=SP); SP = SP + 1
  msb = read_memory(addr=SP); SP = SP + 1
  BC = unsigned_16(lsb=lsb, msb=msb)
```

Detailed timing and pseudocode

M-cycle	M1	M2	M3	M4/M1
Addr bus	Previous	SP	SP	PC
Data bus	IR ← mem	Z ← mem	W ← mem	IR ← mem
IDU op	Previous	SP ← SP + 1	SP ← SP + 1	PC ← PC + 1
ALU op	Previous			
Misc op	Previous			rr ← WZ
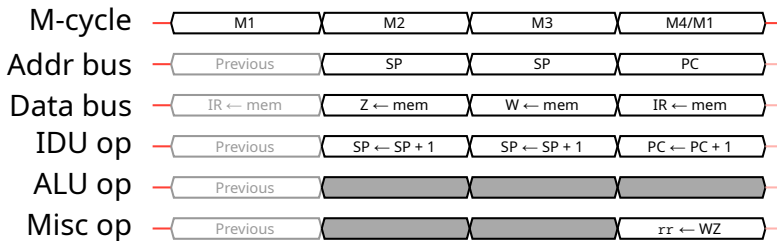
```
# M2
if IR == 0xC1: # example: POP BC
  Z = read_memory(addr=SP); SP = SP + 1
  # M3
  W = read_memory(addr=SP); SP = SP + 1
  # M4/M1
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1; BC = WZ
```

LD HL, SP+e: Load HL from adjusted stack pointer

Load to the HL register, 16-bit data calculated by adding the signed 8-bit operand e to the 16-bit value of the SP register.

Opcode 0b11111000/0xF8
Length 2 bytes: opcode + e

Duration 3 machine cycles
Flags Z = 0, N = 0, H = ★, C = ★

Simple timing and pseudocode


```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xF8:
  e = signed_8(read_memory(addr=PC)); PC = PC + 1
  result, carry_per_bit = SP + e
  HL = result
  flags.Z = 0
  flags.N = 0
  flags.H = 1 if carry_per_bit[3] else 0
  flags.C = 1 if carry_per_bit[7] else 0
```

Detailed timing and pseudocode
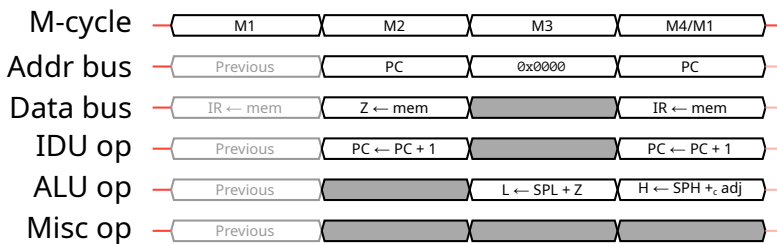

```
# M2
if IR == 0xF8:
  Z = read_memory(addr=PC); PC = PC + 1
  # M3
  result, carry_per_bit = lsb(SP) + Z
  L = result
  flags.Z = 0
  flags.N = 0
  flags.H = 1 if carry_per_bit[3] else 0
  flags.C = 1 if carry_per_bit[7] else 0
  Z_sign = bit(7, Z)
  # M4/M1
  adj = 0xFF if Z_sign else 0x00
  result = msb(SP) + adj + flags.C
  H = result
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

6.4 8-bit arithmetic and logical instructions

ADD r: Add (register)

Adds to the 8-bit A register, the 8-bit register r, and stores the result back into the A register.

Opcode 0b10000xxx/various   **Duration** 1 machine cycle
Length 1 byte: opcode   **Flags**   Z = ★, N = 0, H = ★, C = ★

Simple timing and pseudocode

M-cycle ─< M1 >─
Mem R/W ─< opcode >─

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0x80: # example: ADD B
  result, carry_per_bit = A + B
  A = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 0
  flags.H = 1 if carry_per_bit[3] else 0
  flags.C = 1 if carry_per_bit[7] else 0
```

Detailed timing and pseudocode

M-cycle ─< M1 >< M2/M1 >─
Addr bus ─< Previous >< PC >─
Data bus ─< IR ← mem >< IR ← mem >─
IDU op   ─< Previous >< PC ← PC + 1 >─
ALU op   ─< Previous >< A ← A + r >─
Misc op ─< Previous ><   >─

```
# M2/M1
if IR == 0x80: # example: ADD B
  result, carry_per_bit = A + B
  A = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 0
  flags.H = 1 if carry_per_bit[3] else 0
  flags.C = 1 if carry_per_bit[7] else 0
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

ADD (HL): Add (indirect HL)

Adds to the 8-bit A register, data from the absolute address specified by the 16-bit register HL, and stores the result back into the A register.

Opcode 0b10000110/0x86   **Duration** 2 machine cycles
Length 1 byte: opcode   **Flags** Z = ★, N = 0, H = ★, C = ★

Simple timing and pseudocode

M-cycle	M1	M2
Mem R/W	opcode	R: data

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0x86:
  data = read_memory(addr=HL)
  result, carry_per_bit = A + data
  A = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 0
  flags.H = 1 if carry_per_bit[3] else 0
  flags.C = 1 if carry_per_bit[7] else 0
```

Detailed timing and pseudocode

M-cycle	M1	M2	M3/M1
Addr bus	Previous	HL	PC
Data bus	IR ← mem	Z ← mem	IR ← mem
IDU op	Previous		PC ← PC + 1
ALU op	Previous		A ← A + Z
Misc op	Previous		
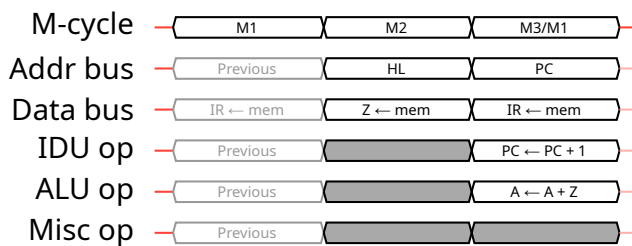
```
# M2
if IR == 0x86:
  Z = read_memory(addr=HL)
  # M3/M1
  result, carry_per_bit = A + Z
  A = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 0
  flags.H = 1 if carry_per_bit[3] else 0
  flags.C = 1 if carry_per_bit[7] else 0
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

ADD n: Add (immediate)

Adds to the 8-bit A register, the immediate data `n`, and stores the result back into the A register.

Opcode `0b11000110/0xC6`
Length 2 bytes: opcode + `n`

Duration 2 machine cycles
Flags Z = ★, N = 0, H = ★, C = ★

Simple timing and pseudocode

M-cycle: M1, M2
Mem R/W: opcode, R: n

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xC6:
  n = read_memory(addr=PC); PC = PC + 1
  result, carry_per_bit = A + n
  A = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 0
  flags.H = 1 if carry_per_bit[3] else 0
  flags.C = 1 if carry_per_bit[7] else 0
```

Detailed timing and pseudocode

M-cycle: M1, M2, M3/M1
Addr bus: Previous, PC, PC
Data bus: IR ← mem, Z ← mem, IR ← mem
IDU op: Previous, PC ← PC + 1, PC ← PC + 1
ALU op: Previous, , A ← A + Z
Misc op: Previous, ,

```
# M2
if IR == 0xC6:
  Z = read_memory(addr=PC); PC = PC + 1
  # M3/M1
  result, carry_per_bit = A + Z
  A = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 0
  flags.H = 1 if carry_per_bit[3] else 0
  flags.C = 1 if carry_per_bit[7] else 0
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

ADC r: Add with carry (register)

Adds to the 8-bit A register, the carry flag and the 8-bit register `r`, and stores the result back into the A register.

Opcode `0b10001xxx`/various   **Duration** 1 machine cycle

Length 1 byte: opcode   **Flags**   Z = ★, N = 0, H = ★, C = ★

Simple timing and pseudocode

```
M-cycle   ─< M1 >─
Mem R/W   ─< opcode >─
```

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0x88: # example: ADC B
  result, carry_per_bit = A + B + flags.C
  A = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 0
  flags.H = 1 if carry_per_bit[3] else 0
  flags.C = 1 if carry_per_bit[7] else 0
```

Detailed timing and pseudocode

```
M-cycle   ─< M1      >< M2/M1      >─
Addr bus  ─< Previous >< PC        >─
Data bus  ─< IR ← mem >< IR ← mem  >─
IDU op    ─< Previous >< PC ← PC + 1 >─
ALU op    ─< Previous >< A ← A +c r >─
Misc op   ─< Previous >< ▓▓▓▓▓▓▓ >─
```

```
# M2/M1
if IR == 0x88: # example: ADC B
  result, carry_per_bit = A + B + flags.C
  A = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 0
  flags.H = 1 if carry_per_bit[3] else 0
  flags.C = 1 if carry_per_bit[7] else 0
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

ADC (HL): Add with carry (indirect HL)

Adds to the 8-bit A register, the carry flag and data from the absolute address specified by the 16-bit register HL, and stores the result back into the A register.

Opcode 0b10001110/0x8E
Length 1 byte: opcode

Duration 2 machine cycles
Flags Z = ★, N = 0, H = ★, C = ★

Simple timing and pseudocode

M-cycle —⟨ M1 ⟩⟨ M2 ⟩—
Mem R/W —⟨ opcode ⟩⟨ R: data ⟩—

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0x8E:
  data = read_memory(addr=HL)
  result, carry_per_bit = A + data + flags.C
  A = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 0
  flags.H = 1 if carry_per_bit[3] else 0
  flags.C = 1 if carry_per_bit[7] else 0
```

Detailed timing and pseudocode

M-cycle —⟨ M1 ⟩⟨ M2 ⟩⟨ M3/M1 ⟩—
Addr bus —⟨ Previous ⟩⟨ HL ⟩⟨ PC ⟩—
Data bus —⟨ IR ← mem ⟩⟨ Z ← mem ⟩⟨ IR ← mem ⟩—
IDU op   —⟨ Previous ⟩⟨ ⟩⟨ PC ← PC + 1 ⟩—
ALU op   —⟨ Previous ⟩⟨ ⟩⟨ A ← A +$_c$ Z ⟩—
Misc op —⟨ Previous ⟩⟨ ⟩⟨ ⟩—

```
# M2
if IR == 0x8E:
  Z = read_memory(addr=HL)
  # M3/M1
  result, carry_per_bit = A + Z + flags.C
  A = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 0
  flags.H = 1 if carry_per_bit[3] else 0
  flags.C = 1 if carry_per_bit[7] else 0
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

ADC n: Add with carry (immediate)

Adds to the 8-bit A register, the carry flag and the immediate data n, and stores the result back into the A register.
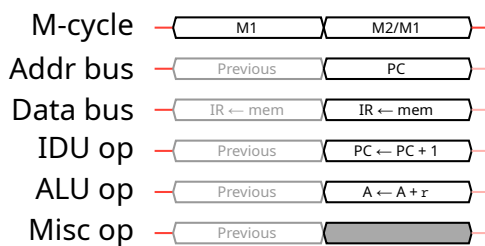
Opcode `0b11001110/0xCE`
Length 2 bytes: opcode + n

Duration 2 machine cycles
Flags Z = ★, N = 0, H = ★, C = ★

Simple timing and pseudocode

M-cycle	M1	M2
Mem R/W	opcode	R: n

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xCE:
  n = read_memory(addr=PC); PC = PC + 1
  result, carry_per_bit = A + n + flags.C
  A = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 0
  flags.H = 1 if carry_per_bit[3] else 0
  flags.C = 1 if carry_per_bit[7] else 0
```

Detailed timing and pseudocode

M-cycle	M1	M2	M3/M1
Addr bus	Previous	PC	PC
Data bus	IR ← mem	Z ← mem	IR ← mem
IDU op	Previous	PC ← PC + 1	PC ← PC + 1
ALU op	Previous		A ← A +$_c$ Z
Misc op	Previous		

```
# M2
if IR == 0xCE:
  Z = read_memory(addr=PC); PC = PC + 1
  # M3/M1
  result, carry_per_bit = A + Z + flags.C
  A = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 0
  flags.H = 1 if carry_per_bit[3] else 0
  flags.C = 1 if carry_per_bit[7] else 0
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

SUB r: Subtract (register)

Subtracts from the 8-bit A register, the 8-bit register `r`, and stores the result back into the A register.

Opcode `0b10010xxx`/various
Length 1 byte: opcode

Duration 1 machine cycle
Flags Z = ★, N = 1, H = ★, C = ★

Simple timing and pseudocode

M-cycle ──⟨ M1 ⟩──
Mem R/W ──⟨ opcode ⟩──

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0x90: # example: SUB B
  result, carry_per_bit = A - B
  A = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 1
  flags.H = 1 if carry_per_bit[3] else 0
  flags.C = 1 if carry_per_bit[7] else 0
```

Detailed timing and pseudocode

M-cycle ──⟨ M1 ⟩⟨ M2/M1 ⟩──
Addr bus ──⟨ Previous ⟩⟨ PC ⟩──
Data bus ──⟨ IR ← mem ⟩⟨ IR ← mem ⟩──
IDU op   ──⟨ Previous ⟩⟨ PC ← PC + 1 ⟩──
ALU op   ──⟨ Previous ⟩⟨ A ← A - r ⟩──
Misc op ──⟨ Previous ⟩▓▓▓▓──

```
# M2/M1
if IR == 0x90: # example: SUB B
  result, carry_per_bit = A - B
  A = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 1
  flags.H = 1 if carry_per_bit[3] else 0
  flags.C = 1 if carry_per_bit[7] else 0
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

SUB (HL): Subtract (indirect HL)

Subtracts from the 8-bit A register, data from the absolute address specified by the 16-bit register HL, and stores the result back into the A register.
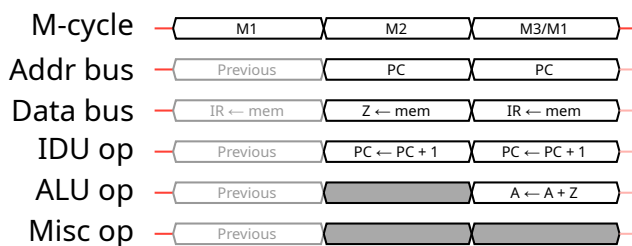
Opcode 0b10010110/0x96
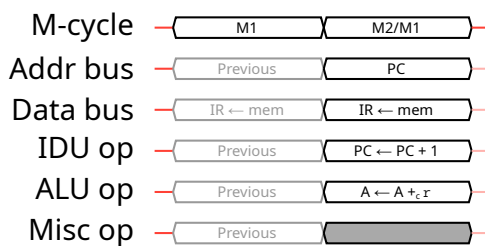**Length** 1 byte: opcode

Duration 2 machine cycles
Flags Z = ★, N = 1, H = ★, C = ★

Simple timing and pseudocode


```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0x96:
  data = read_memory(addr=HL)
  result, carry_per_bit = A - data
  A = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 1
  flags.H = 1 if carry_per_bit[3] else 0
  flags.C = 1 if carry_per_bit[7] else 0
```

Detailed timing and pseudocode
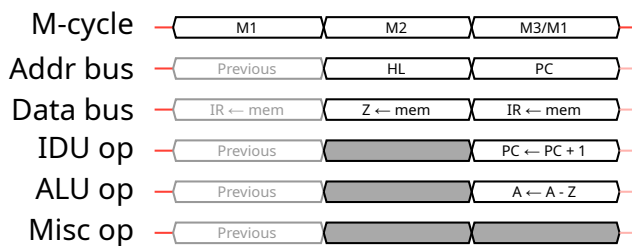

```
# M2
if IR == 0x96:
  Z = read_memory(addr=HL)
  # M3/M1
  result, carry_per_bit = A - Z
  A = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 1
  flags.H = 1 if carry_per_bit[3] else 0
  flags.C = 1 if carry_per_bit[7] else 0
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

SUB n: Subtract (immediate)

Subtracts from the 8-bit A register, the immediate data `n`, and stores the result back into the A register.

Opcode `0b11010110/0xD6` **Duration** 2 machine cycles
Length 2 bytes: opcode + n **Flags** Z = ★, N = 1, H = ★, C = ★

Simple timing and pseudocode

M-cycle: M1, M2
Mem R/W: opcode, R: n

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xD6:
  n = read_memory(addr=PC); PC = PC + 1
  result, carry_per_bit = A - n
  A = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 1
  flags.H = 1 if carry_per_bit[3] else 0
  flags.C = 1 if carry_per_bit[7] else 0
```

Detailed timing and pseudocode

M-cycle: M1, M2, M3/M1
Addr bus: Previous, PC, PC
Data bus: IR ← mem, Z ← mem, IR ← mem
IDU op: Previous, PC ← PC + 1, PC ← PC + 1
ALU op: Previous, , A ← A - Z
Misc op: Previous, ,

```
# M2
if IR == 0xD6:
  Z = read_memory(addr=PC); PC = PC + 1
  # M3/M1
  result, carry_per_bit = A - Z
  A = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 1
  flags.H = 1 if carry_per_bit[3] else 0
  flags.C = 1 if carry_per_bit[7] else 0
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

SBC r: Subtract with carry (register)

Subtracts from the 8-bit A register, the carry flag and the 8-bit register `r`, and stores the result back into the A register.

Opcode `0b10011xxx`/various   **Duration** 1 machine cycle
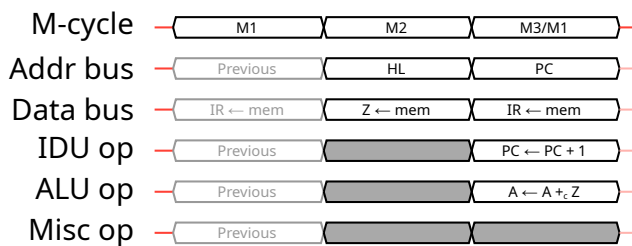
Length   1 byte: opcode   **Flags**   Z = ★, N = 1, H = ★, C = ★

Simple timing and pseudocode


```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0x98: # example: SBC B
  result, carry_per_bit = A - B - flags.C
  A = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 1
  flags.H = 1 if carry_per_bit[3] else 0
  flags.C = 1 if carry_per_bit[7] else 0
```

Detailed timing and pseudocode


```
# M2/M1
if IR == 0x98: # example: SBC B
  result, carry_per_bit = A - B - flags.C
  A = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 1
  flags.H = 1 if carry_per_bit[3] else 0
  flags.C = 1 if carry_per_bit[7] else 0
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

SBC (HL): Subtract with carry (indirect HL)

Subtracts from the 8-bit A register, the carry flag and data from the absolute address specified by the 16-bit register HL, and stores the result back into the A register.

Opcode 0b10011110/0x9E
Length 1 byte: opcode

Duration 2 machine cycles
Flags Z = ★, N = 1, H = ★, C = ★

Simple timing and pseudocode

M-cycle — M1 | M2 —
Mem R/W — opcode | R: data —

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0x9E:
  data = read_memory(addr=HL)
  result, carry_per_bit = A - data - flags.C
  A = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 1
  flags.H = 1 if carry_per_bit[3] else 0
  flags.C = 1 if carry_per_bit[7] else 0
```

Detailed timing and pseudocode

M-cycle — M1 | M2 | M3/M1 —
Addr bus — Previous | HL | PC —
Data bus — IR ← mem | Z ← mem | IR ← mem —
IDU op — Previous | | PC ← PC + 1 —
ALU op — Previous | | A ← A -c Z —
Misc op — Previous | | —
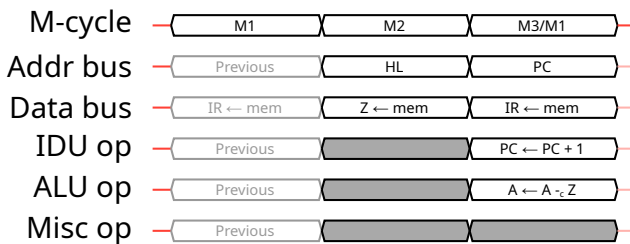
```
# M2
if IR == 0x9E:
  Z = read_memory(addr=HL)
  # M3/M1
  result, carry_per_bit = A - Z - flags.C
  A = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 1
  flags.H = 1 if carry_per_bit[3] else 0
  flags.C = 1 if carry_per_bit[7] else 0
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

SBC n: Subtract with carry (immediate)

Subtracts from the 8-bit A register, the carry flag and the immediate data `n`, and stores the result back into the A register.

Opcode 0b11011110/0xDE   **Duration** 2 machine cycles
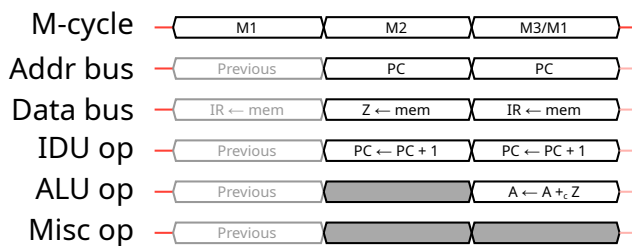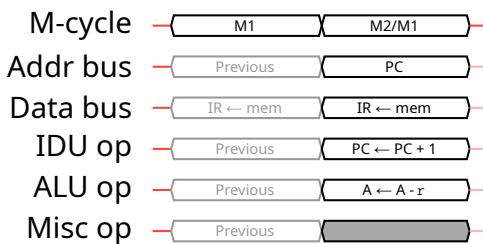**Length** 2 bytes: opcode + n   **Flags** Z = ★, N = 1, H = ★, C = ★

Simple timing and pseudocode


```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xDE:
  n = read_memory(addr=PC); PC = PC + 1
  result, carry_per_bit = A - n - flags.C
  A = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 1
  flags.H = 1 if carry_per_bit[3] else 0
  flags.C = 1 if carry_per_bit[7] else 0
```

Detailed timing and pseudocode
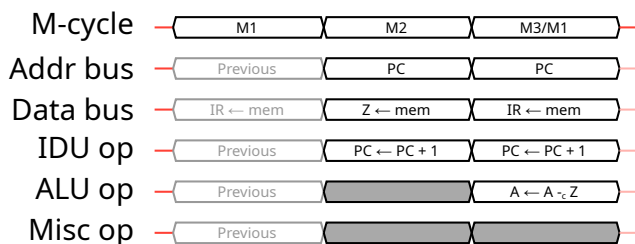

```
# M2
if IR == 0xDE:
  Z = read_memory(addr=PC); PC = PC + 1
  # M3/M1
  result, carry_per_bit = A - Z - flags.C
  A = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 1
  flags.H = 1 if carry_per_bit[3] else 0
  flags.C = 1 if carry_per_bit[7] else 0
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

CP r: Compare (register)

Subtracts from the 8-bit A register, the 8-bit register r, and updates flags based on the result. This instruction is basically identical to SUB r, but does not update the A register.

Opcode 0b10111xxx/various
Length 1 byte: opcode

Duration 1 machine cycle
Flags Z = ★, N = 1, H = ★, C = ★

Simple timing and pseudocode

```
M-cycle  —⟨    M1    ⟩—
Mem R/W  —⟨  opcode  ⟩—
```

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xB8: # example: CP B
  result, carry_per_bit = A – B
  flags.Z = 1 if result == 0 else 0
  flags.N = 1
  flags.H = 1 if carry_per_bit[3] else 0
  flags.C = 1 if carry_per_bit[7] else 0
```

Detailed timing and pseudocode

```
M-cycle  —⟨   M1   ⟩⟨   M2/M1   ⟩—
Addr bus —⟨ Previous ⟩⟨    PC    ⟩—
Data bus —⟨ IR ← mem ⟩⟨ IR ← mem ⟩—
IDU op   —⟨ Previous ⟩⟨ PC ← PC + 1 ⟩—
ALU op   —⟨ Previous ⟩⟨   A - r   ⟩—
Misc op  —⟨ Previous ⟩⟨▒▒▒▒▒▒▒▒▒⟩—
```
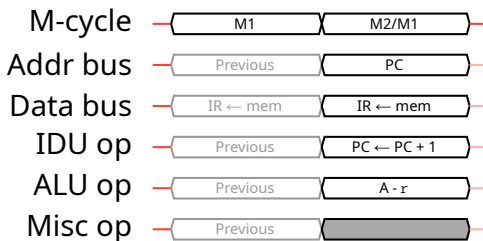
```
# M2/M1
if IR == 0xB8: # example: CP B
  result, carry_per_bit = A – B
  flags.Z = 1 if result == 0 else 0
  flags.N = 1
  flags.H = 1 if carry_per_bit[3] else 0
  flags.C = 1 if carry_per_bit[7] else 0
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

CP (HL): Compare (indirect HL)

Subtracts from the 8-bit A register, data from the absolute address specified by the 16-bit register HL, and updates flags based on the result. This instruction is basically identical to SUB (HL), but does not update the A register.

Opcode 0b10111110/0xBE
Length 1 byte: opcode

Duration 2 machine cycles
Flags Z = ★, N = 1, H = ★, C = ★

Simple timing and pseudocode

M-cycle	M1	M2
Mem R/W	opcode	R: data

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xBE:
  data = read_memory(addr=HL)
  result, carry_per_bit = A − data
  flags.Z = 1 if result == 0 else 0
  flags.N = 1
  flags.H = 1 if carry_per_bit[3] else 0
  flags.C = 1 if carry_per_bit[7] else 0
```

Detailed timing and pseudocode

M-cycle	M1	M2	M3/M1
Addr bus	Previous	HL	PC
Data bus	IR ← mem	Z ← mem	IR ← mem
IDU op	Previous		PC ← PC + 1
ALU op	Previous		A - Z
Misc op	Previous		
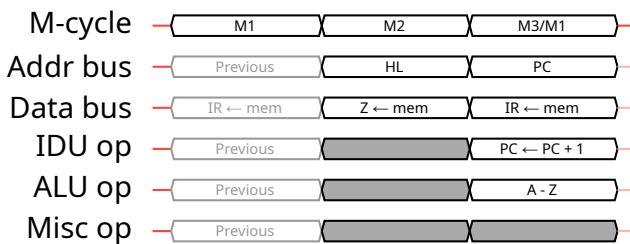
```
# M2
if IR == 0xBE:
  Z = read_memory(addr=HL)
  # M3/M1
  result, carry_per_bit = A − Z
  flags.Z = 1 if result == 0 else 0
  flags.N = 1
  flags.H = 1 if carry_per_bit[3] else 0
  flags.C = 1 if carry_per_bit[7] else 0
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

CP n: Compare (immediate)

Subtracts from the 8-bit A register, the immediate data `n`, and updates flags based on the result. This instruction is basically identical to SUB n, but does not update the A register.

Opcode `0b11111110/0xFE`
Length 2 bytes: opcode + `n`
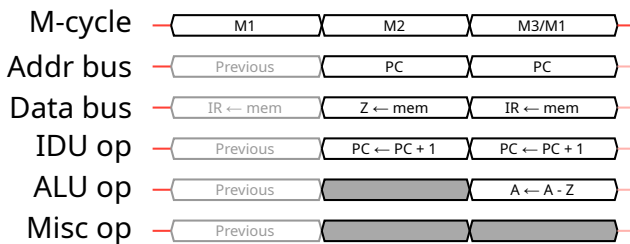
Duration 2 machine cycles
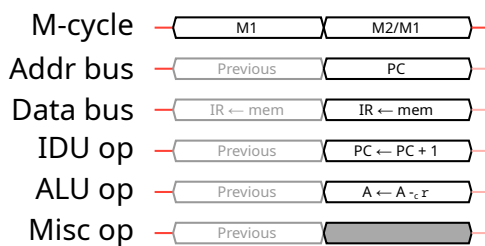**Flags** Z = ★, N = 1, H = ★, C = ★

Simple timing and pseudocode


```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xFE:
  n = read_memory(addr=PC); PC = PC + 1
  result, carry_per_bit = A – n
  flags.Z = 1 if result == 0 else 0
  flags.N = 1
  flags.H = 1 if carry_per_bit[3] else 0
  flags.C = 1 if carry_per_bit[7] else 0
```

Detailed timing and pseudocode
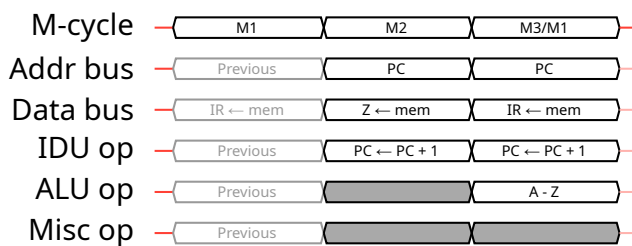

```
# M2
if IR == 0xFE:
  Z = read_memory(addr=PC); PC = PC + 1
  # M3/M1
  result, carry_per_bit = A – Z
  flags.Z = 1 if result == 0 else 0
  flags.N = 1
  flags.H = 1 if carry_per_bit[3] else 0
  flags.C = 1 if carry_per_bit[7] else 0
```

INC r: Increment (register)

Increments data in the 8-bit register `r`.

Opcode `0b00xxx100/various`
Length 1 byte: opcode

Duration 1 machine cycle
Flags Z = ★, N = 0, H = ★

Simple timing and pseudocode

```
M-cycle  ─〈     M1     〉─
Mem R/W  ─〈   opcode   〉─
```

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0x04: # example: INC B
  result, carry_per_bit = B + 1
  B = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 0
  flags.H = 1 if carry_per_bit[3] else 0
```

Detailed timing and pseudocode

```
M-cycle  ─〈    M1    〉〈    M2/M1    〉─
Addr bus ─〈  Previous 〉〈     PC     〉─
Data bus ─〈 IR ← mem 〉〈  IR ← mem  〉─
IDU op   ─〈  Previous 〉〈 PC ← PC + 1 〉─
ALU op   ─〈  Previous 〉〈  r ← r + 1 〉─
Misc op  ─〈  Previous 〉〈▒▒▒▒▒▒▒▒▒▒▒〉─
```

```
# M2/M1
if IR == 0x04: # example: INC B
  result, carry_per_bit = B + 1
  B = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 0
  flags.H = 1 if carry_per_bit[3] else 0
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

INC (HL): Increment (indirect HL)

Increments data at the absolute address specified by the 16-bit register HL.

Opcode 0b00110100/0x34   **Duration** 3 machine cycles
Length 1 byte: opcode   **Flags** Z = ★, N = 0, H = ★

Simple timing and pseudocode

M-cycle	M1	M2	M3
Mem R/W	opcode	R: data	W: data

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0x34:
  data = read_memory(addr=HL)
  result, carry_per_bit = data + 1
  write_memory(addr=HL, data=result)
  flags.Z = 1 if result == 0 else 0
  flags.N = 0
  flags.H = 1 if carry_per_bit[3] else 0
```

Detailed timing and pseudocode

M-cycle	M1	M2	M3	M4/M1
Addr bus	Previous	HL	HL	PC
Data bus	IR ← mem	Z ← mem	mem ← ALU	IR ← mem
IDU op	Previous			PC ← PC + 1
ALU op	Previous		mem ← Z + 1	
Misc op	Previous			
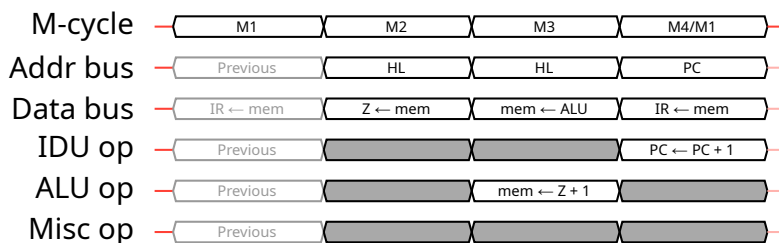
```
# M2
if IR == 0x34:
  Z = read_memory(addr=HL)
  # M3
  result, carry_per_bit = Z + 1
  write_memory(addr=HL, data=result)
  flags.Z = 1 if result == 0 else 0
  flags.N = 0
  flags.H = 1 if carry_per_bit[3] else 0
  # M4/M1
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

DEC r: Decrement (register)

Decrements data in the 8-bit register `r`.

Opcode `0b00xxx101`/various   **Duration** 1 machine cycle
Length 1 byte: opcode   **Flags**   Z = ★, N = 1, H = ★

Simple timing and pseudocode

M-cycle —〈   M1   〉—
Mem R/W —〈 opcode 〉—

```
opcode = read_memory(addr=PC); PC = PC + 1
# example: DEC B
if opcode == 0x05:
  result, carry_per_bit = B – 1
  B = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 1
  flags.H = 1 if carry_per_bit[3] else 0
```

Detailed timing and pseudocode

M-cycle —〈   M1   〉〈   M2/M1   〉—
Addr bus —〈 Previous 〉〈   PC   〉—
Data bus —〈 IR ← mem 〉〈 IR ← mem 〉—
IDU op   —〈 Previous 〉〈 PC ← PC + 1 〉—
ALU op   —〈 Previous 〉〈 r ← r - 1 〉—
Misc op —〈 Previous 〉〈   〉—

```
# M2/M1
if IR == 0x05: # example: DEC B
  result, carry_per_bit = B – 1
  B = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 1
  flags.H = 1 if carry_per_bit[3] else 0
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

DEC (HL): Decrement (indirect HL)

Decrements data at the absolute address specified by the 16-bit register HL.

Opcode 0b00110101/0x35
Length 1 byte: opcode

Duration 3 machine cycles
Flags Z = ★, N = 1, H = ★

Simple timing and pseudocode

M-cycle	M1	M2	M3
Mem R/W	opcode	R: data	W: data

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0x35:
  data = read_memory(addr=HL)
  result, carry_per_bit = data – 1
  write_memory(addr=HL, data=result)
  flags.Z = 1 if result == 0 else 0
  flags.N = 1
  flags.H = 1 if carry_per_bit[3] else 0
```

Detailed timing and pseudocode

M-cycle	M1	M2	M3	M4/M1
Addr bus	Previous	HL	HL	PC
Data bus	IR ← mem	Z ← mem	mem ← ALU	IR ← mem
IDU op	Previous			PC ← PC + 1
ALU op	Previous		mem ← Z - 1	
Misc op	Previous			
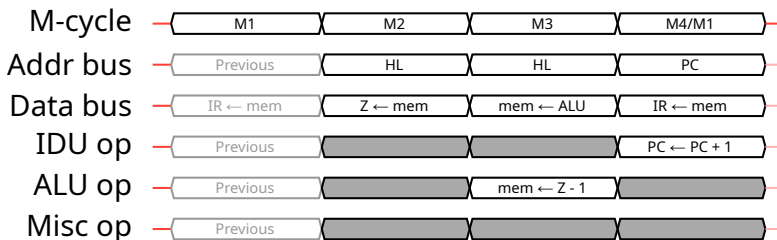
```
# M2
if IR == 0x35:
  Z = read_memory(addr=HL)
  # M3
  result, carry_per_bit = Z – 1
  write_memory(addr=HL, data=result)
  flags.Z = 1 if result == 0 else 0
  flags.N = 1
  flags.H = 1 if carry_per_bit[3] else 0
  # M4/M1
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

AND r: Bitwise AND (register)

Performs a bitwise AND operation between the 8-bit A register and the 8-bit register `r`, and stores the result back into the A register.

Opcode `0b10100xxx`/various **Duration** 1 machine cycle
Length 1 byte: opcode **Flags** Z = ★, N = 0, H = 1, C = 0

Simple timing and pseudocode

```
M-cycle   ─〈     M1     〉─
Mem R/W   ─〈   opcode   〉─
```

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xA0: # example: AND B
  result = A & B
  A = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 0
  flags.H = 1
  flags.C = 0
```

Detailed timing and pseudocode

```
M-cycle   ─〈    M1    〉〈   M2/M1   〉─
Addr bus  ─〈  Previous 〉〈    PC    〉─
Data bus  ─〈 IR ← mem 〉〈 IR ← mem 〉─
IDU op    ─〈  Previous 〉〈 PC ← PC + 1 〉─
ALU op    ─〈  Previous 〉〈 A ← A and r 〉─
Misc op   ─〈  Previous 〉〈           〉─
```
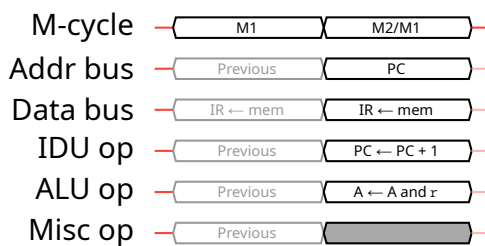
```
# M2/M1
if IR == 0xA0: # example: AND B
  result = A & B
  A = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 0
  flags.H = 1
  flags.C = 0
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

AND (HL): Bitwise AND (indirect HL)

Performs a bitwise AND operation between the 8-bit A register and data from the absolute address specified by the 16-bit register HL, and stores the result back into the A register.

Opcode `0b10100110/0xA6`　　　　　**Duration** 2 machine cycles
Length 1 byte: opcode　　　　　　**Flags** Z = ★, N = 0, H = 1, C = 0

Simple timing and pseudocode


```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xA6:
  data = read_memory(addr=HL)
  result = A & data
  A = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 0
  flags.H = 1
  flags.C = 0
```

Detailed timing and pseudocode


```
# M2
if IR == 0xA6:
  Z = read_memory(addr=HL)
  # M3/M1
  result = A & Z
  A = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 0
  flags.H = 1
  flags.C = 0
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

AND n: Bitwise AND (immediate)

Performs a bitwise AND operation between the 8-bit A register and immediate data `n`, and stores the result back into the A register.

Opcode `0b11100110/0xE6`
Length 2 bytes: opcode + n

Duration 2 machine cycles
Flags Z = ★, N = 0, H = 1, C = 0

Simple timing and pseudocode


```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xE6:
  n = read_memory(addr=PC); PC = PC + 1
  result = A & n
  A = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 0
  flags.H = 1
  flags.C = 0
```

Detailed timing and pseudocode
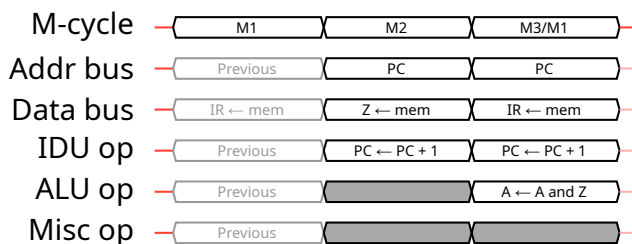

```
# M2
if IR == 0xE6:
  Z = read_memory(addr=PC); PC = PC + 1
  # M3/M1
  result = A & Z
  A = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 0
  flags.H = 1
  flags.C = 0
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

OR r: Bitwise OR (register)

Performs a bitwise OR operation between the 8-bit A register and the 8-bit register `r`, and stores the result back into the A register.

Opcode `0b10110xxx`/various
Length 1 byte: opcode

Duration 1 machine cycle
Flags Z = ★, N = 0, H = 0, C = 0

Simple timing and pseudocode

```
M-cycle   ─⟨    M1    ⟩─
Mem R/W   ─⟨  opcode  ⟩─
```

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xB0: # example: OR B
  result = A | B
  A = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 0
  flags.H = 0
  flags.C = 0
```

Detailed timing and pseudocode

```
M-cycle   ─⟨    M1    ⟩⟨   M2/M1   ⟩─
Addr bus  ─⟨ Previous ⟩⟨    PC     ⟩─
Data bus  ─⟨ IR ← mem ⟩⟨  IR ← mem ⟩─
IDU op    ─⟨ Previous ⟩⟨ PC ← PC + 1⟩─
ALU op    ─⟨ Previous ⟩⟨ A ← A or r ⟩─
Misc op   ─⟨ Previous ⟩⟨           ⟩─
```
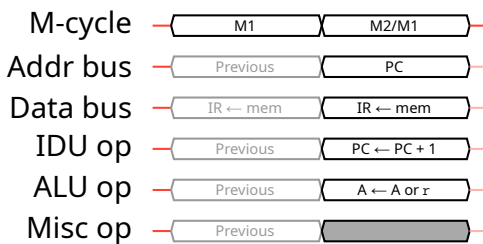
```
# M2/M1
if IR == 0xB0: # example: OR B
  result = A | B
  A = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 0
  flags.H = 0
  flags.C = 0
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

OR (HL): Bitwise OR (indirect HL)

Performs a bitwise OR operation between the 8-bit A register and data from the absolute address specified by the 16-bit register HL, and stores the result back into the A register.

Opcode 0b10110110/0xB6
Length 1 byte: opcode

Duration 2 machine cycles
Flags Z = ★, N = 0, H = 0, C = 0

Simple timing and pseudocode


```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xB6:
  data = read_memory(addr=HL)
  result = A | data
  A = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 0
  flags.H = 0
  flags.C = 0
```

Detailed timing and pseudocode
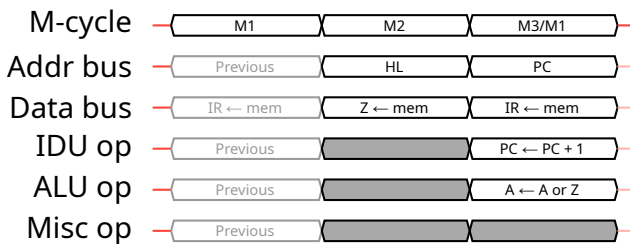

```
# M2
if IR == 0xB6:
  Z = read_memory(addr=HL)
  # M3/M1
  result = A | Z
  A = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 0
  flags.H = 0
  flags.C = 0
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

OR n: Bitwise OR (immediate)

Performs a bitwise OR operation between the 8-bit A register and immediate data n, and stores the result back into the A register.

Opcode 0b11110110/0xF6
Length 2 bytes: opcode + n

Duration 2 machine cycles
Flags Z = ★, N = 0, H = 0, C = 0

Simple timing and pseudocode

M-cycle	M1	M2
Mem R/W	opcode	R: n

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xF6:
  n = read_memory(addr=PC); PC = PC + 1
  result = A | n
  A = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 0
  flags.H = 0
  flags.C = 0
```

Detailed timing and pseudocode

M-cycle	M1	M2	M3/M1
Addr bus	Previous	PC	PC
Data bus	IR ← mem	Z ← mem	IR ← mem
IDU op	Previous	PC ← PC + 1	PC ← PC + 1
ALU op	Previous		A ← A or Z
Misc op	Previous		

```
# M2
if IR == 0xF6:
  Z = read_memory(addr=PC); PC = PC + 1
  # M3/M1
  result = A | Z
  A = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 0
  flags.H = 0
  flags.C = 0
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

XOR r: Bitwise XOR (register)

Performs a bitwise XOR operation between the 8-bit A register and the 8-bit register `r`, and stores the result back into the A register.

Opcode `0b10101xxx`/various **Duration** 1 machine cycle
Length 1 byte: opcode **Flags** Z = ★, N = 0, H = 0, C = 0

Simple timing and pseudocode

```
M-cycle    ─┤ M1 ├─
Mem R/W    ─┤ opcode ├─
```

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xA8: # example: XOR B
  result = A ^ B
  A = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 0
  flags.H = 0
  flags.C = 0
```

Detailed timing and pseudocode

```
M-cycle    ─┤ M1 │ M2/M1 ├─
Addr bus   ─┤ Previous │ PC ├─
Data bus   ─┤ IR ← mem │ IR ← mem ├─
IDU op     ─┤ Previous │ PC ← PC + 1 ├─
ALU op     ─┤ Previous │ A ← A xor r ├─
Misc op    ─┤ Previous │ ████████ ├─
```
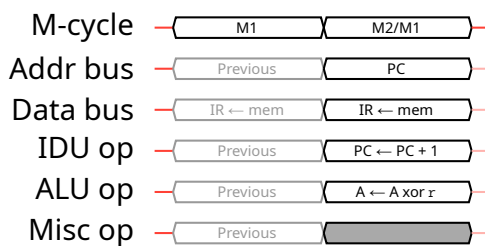
```
# M2/M1
if IR == 0xA8: # example: XOR B
  result = A ^ B
  A = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 0
  flags.H = 0
  flags.C = 0
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

XOR (HL): Bitwise XOR (indirect HL)

Performs a bitwise XOR operation between the 8-bit A register and data from the absolute address specified by the 16-bit register HL, and stores the result back into the A register.

Opcode `0b10101110/0xAE`
Length 1 byte: opcode

Duration 2 machine cycles
Flags Z = ★, N = 0, H = 0, C = 0

Simple timing and pseudocode

M-cycle	M1	M2
Mem R/W	opcode	R: data

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xAE:
  data = read_memory(addr=HL)
  result = A ^ data
  A = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 0
  flags.H = 0
  flags.C = 0
```

Detailed timing and pseudocode

M-cycle	M1	M2	M3/M1
Addr bus	Previous	HL	PC
Data bus	IR ← mem	Z ← mem	IR ← mem
IDU op	Previous		PC ← PC + 1
ALU op	Previous		A ← A xor Z
Misc op	Previous		
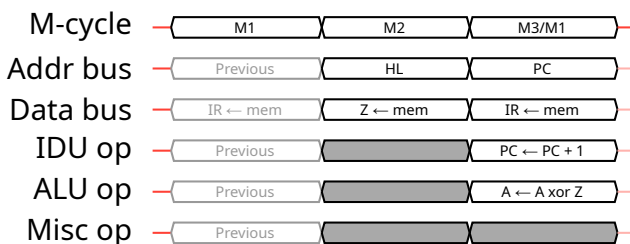
```
# M2
if IR == 0xAE:
  Z = read_memory(addr=HL)
  # M3/M1
  result = A ^ Z
  A = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 0
  flags.H = 0
  flags.C = 0
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

XOR n: Bitwise XOR (immediate)

Performs a bitwise XOR operation between the 8-bit A register and immediate data `n`, and stores the result back into the A register.

Opcode `0b11101110/0xEE`　　　　**Duration** 2 machine cycles
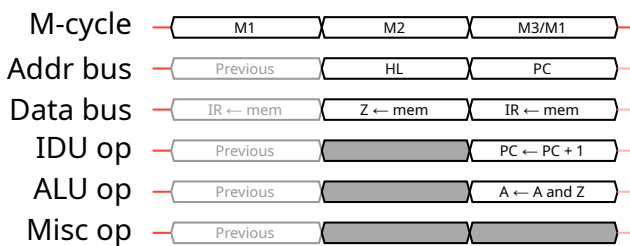**Length** 2 bytes: opcode + n　　　**Flags** Z = ★, N = 0, H = 0, C = 0

Simple timing and pseudocode


```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xEE:
  n = read_memory(addr=PC); PC = PC + 1
  result = A ^ n
  A = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 0
  flags.H = 0
  flags.C = 0
```

Detailed timing and pseudocode
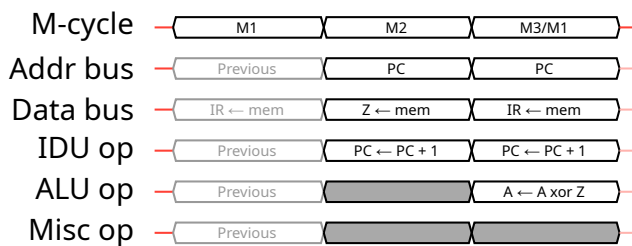

```
# M2
if IR == 0xEE:
  Z = read_memory(addr=PC); PC = PC + 1
  # M3/M1
  result = A ^ Z
  A = result
  flags.Z = 1 if result == 0 else 0
  flags.N = 0
  flags.H = 0
  flags.C = 0
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

CCF: Complement carry flag

Flips the carry flag, and clears the N and H flags.

Opcode 0b00111111/0x3F   **Duration** 1 machine cycle
Length 1 byte: opcode   **Flags** N = 0, H = 0, C = ★

Simple timing and pseudocode

M-cycle —⟨ M1 ⟩—
Mem R/W —⟨ opcode ⟩—

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0x3F:
  flags.N = 0
  flags.H = 0
  flags.C = ~flags.C
```

Detailed timing and pseudocode

M-cycle —⟨ M1 ⟩⟨ M2/M1 ⟩—
Addr bus —⟨ Previous ⟩⟨ PC ⟩—
Data bus —⟨ IR ← mem ⟩⟨ IR ← mem ⟩—
IDU op —⟨ Previous ⟩⟨ PC ← PC + 1 ⟩—
ALU op —⟨ Previous ⟩⟨ cf ← not cf ⟩—
Misc op —⟨ Previous ⟩⟨ ▓▓▓▓ ⟩—
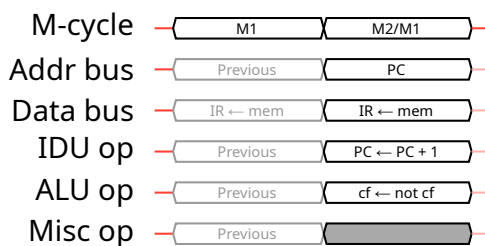
```
# M2/M1
if IR == 0x3F:
  flags.N = 0
  flags.H = 0
  flags.C = ~flags.C
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

SCF: Set carry flag

Sets the carry flag, and clears the N and H flags.

Opcode 0b00110111/0x37   **Duration** 1 machine cycle
Length 1 byte: opcode   **Flags** N = 0, H = 0, C = 1
Simple timing and pseudocode

M-cycle ─⟨___M1___⟩─

Mem R/W ─⟨__opcode__⟩─

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0x37:
  flags.N = 0
  flags.H = 0
  flags.C = 1
```

Detailed timing and pseudocode

M-cycle ─⟨___M1___⟩⟨__M2/M1__⟩─
Addr bus ─⟨_Previous_⟩⟨___PC___⟩─
Data bus ─⟨_IR ← mem_⟩⟨_IR ← mem_⟩─
IDU op ─⟨_Previous_⟩⟨_PC ← PC + 1_⟩─
ALU op ─⟨_Previous_⟩⟨_cf ← 1_⟩─
Misc op ─⟨_Previous_⟩⟨▓▓▓▓▓▓▓⟩─
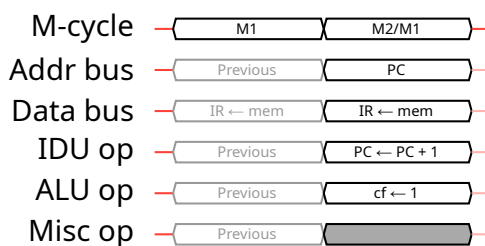
```
# M2/M1
if IR == 0x37:
  flags.N = 0
  flags.H = 0
  flags.C = 1
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

DAA: Decimal adjust accumulator

TODO

Opcode 0b00100111/0x27
Length 1 byte: opcode

Duration 1 machine cycle
Flags Z = ★, H = 0, C = ★

Simple timing and pseudocode

M-cycle	M1
Mem R/W	opcode

Detailed timing and pseudocode

M-cycle	M1	M2/M1
Addr bus	Previous	PC
Data bus	IR ← mem	IR ← mem
IDU op	Previous	PC ← PC + 1
ALU op	Previous	A ← A + adj
Misc op	Previous	
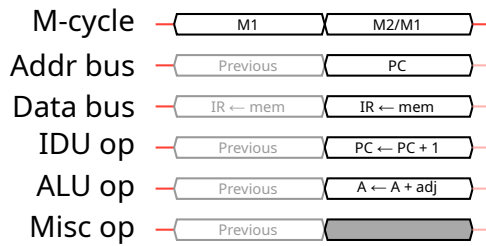
TODO

CPL: Complement accumulator

Flips all the bits in the 8-bit A register, and sets the N and H flags.

Opcode 0b00101111/0x2F   **Duration** 1 machine cycle
Length 1 byte: opcode   **Flags**   N = 1, H = 1

Simple timing and pseudocode

M-cycle ────⟨ M1 ⟩────

Mem R/W ────⟨ opcode ⟩────

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0x2F:
  A = ~A
  flags.N = 1
  flags.H = 1
```

Detailed timing and pseudocode

M-cycle ────⟨ M1 ⟩⟨ M2/M1 ⟩────
Addr bus ────⟨ Previous ⟩⟨ PC ⟩────
Data bus ────⟨ IR ← mem ⟩⟨ IR ← mem ⟩────
IDU op ────⟨ Previous ⟩⟨ PC ← PC + 1 ⟩────
ALU op ────⟨ Previous ⟩⟨ A ← not A ⟩────
Misc op ────⟨ Previous ⟩⟨ ⟩────

```
# M2/M1
if IR == 0x2F:
  A = ~A
  flags.N = 1
  flags.H = 1
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

6.5 16-bit arithmetic instructions

INC rr: Increment 16-bit register

Increments data in the 16-bit register `rr`.

Opcode `0b00xx0011`/various   **Duration** 2 machine cycles
Length 1 byte: opcode   **Flags** -
Simple timing and pseudocode


```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0x03: # example: INC BC
  BC = BC + 1
```

Detailed timing and pseudocode
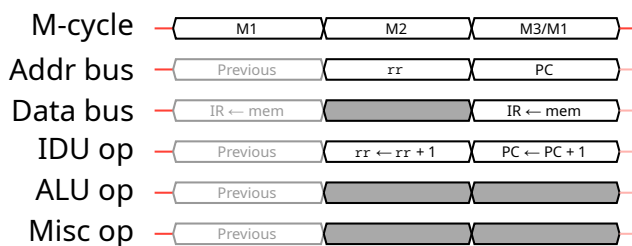

```
# M2
if IR == 0x03: # example: INC BC
  BC = BC + 1
  # M3/M1
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

DEC rr: Decrement 16-bit register

Decrements data in the 16-bit register `rr`.

Opcode `0b00xx1011`/various   **Duration** 2 machine cycles
Length 1 byte: opcode   **Flags** -

Simple timing and pseudocode


```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0x0B: # example: DEC BC
  BC = BC − 1
```

Detailed timing and pseudocode
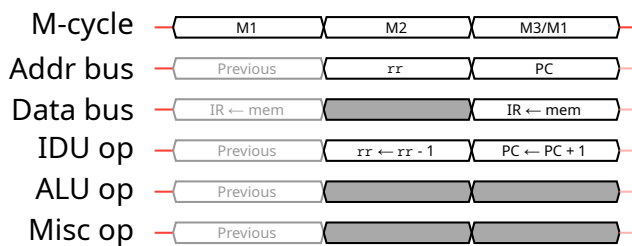

```
# M2
if IR == 0x0B: # example: DEC BC
  BC = BC − 1
  # M3/M1
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

ADD HL, rr: Add (16-bit register)

Adds to the 16-bit HL register pair, the 16-bit register `rr`, and stores the result back into the HL register pair.

Opcode `0b00xx1001`/various
Length 1 byte: opcode

Duration 2 machine cycles
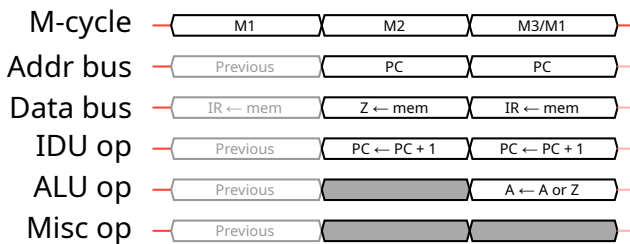**Flags** N = 0, H = ★, C = ★

Simple timing and pseudocode


```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0x09:  # example: ADD HL, BC
  result, carry_per_bit = HL + BC
  HL = result
  flags.N = 0
  flags.H = 1 if carry_per_bit[11] else 0
  flags.C = 1 if carry_per_bit[15] else 0
```

Detailed timing and pseudocode
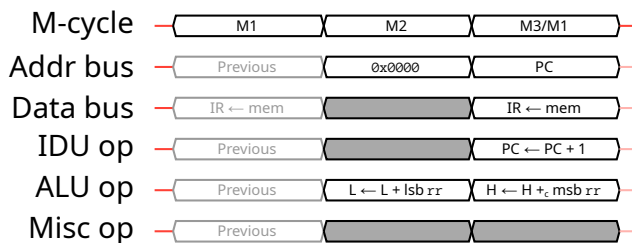

```
# M2
if IR == 0x09:  # example: ADD HL, BC
  result, carry_per_bit = L + C
  L = result
  flags.N = 0
  flags.H = 1 if carry_per_bit[3] else 0
  flags.C = 1 if carry_per_bit[7] else 0
  # M3/M1
  result, carry_per_bit = H + B + flags.C
  H = result
  flags.N = 0
  flags.H = 1 if carry_per_bit[3] else 0
  flags.C = 1 if carry_per_bit[7] else 0
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

ADD SP, e: Add to stack pointer (relative)

Loads to the 16-bit SP register, 16-bit data calculated by adding the signed 8-bit operand e to the 16-bit value of the SP register.

Opcode 0b11101000/0xE8　　　　　**Duration** 4 machine cycles
Length 2 bytes: opcode + e　　　　**Flags** Z = 0, N = 0, H = ★, C = ★

Simple timing and pseudocode


```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xE8:
  e = signed_8(read_memory(addr=PC)); PC = PC + 1
  result, carry_per_bit = SP + e
  SP = result
  flags.Z = 0
  flags.N = 0
  flags.H = 1 if carry_per_bit[3] else 0
  flags.C = 1 if carry_per_bit[7] else 0
```

Detailed timing and pseudocode
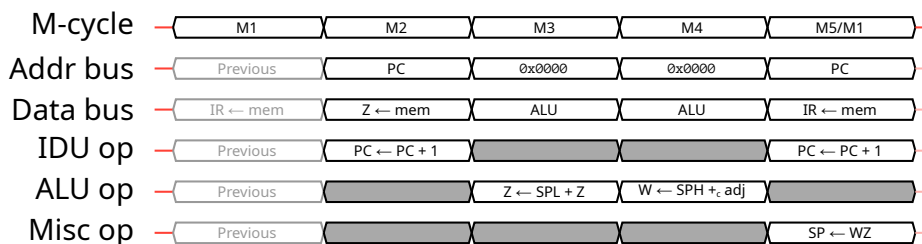

```
# M2
if IR == 0xE8:
  Z = read_memory(addr=PC); PC = PC + 1
  # M3
  result, carry_per_bit = lsb(SP) + Z
  Z = result
  flags.Z = 0
  flags.N = 0
  flags.H = 1 if carry_per_bit[3] else 0
  flags.C = 1 if carry_per_bit[7] else 0
  # M4
  result = msb(SP) + adj + flags.C
  W = result
  # M5/M1
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1; SP = WZ
```

6.6 Rotate, shift, and bit operation instructions

RLCA: Rotate left circular (accumulator)

Rotates the 8-bit A register value left in a circular manner (carry flag is updated but not used).

Every bit is shifted to the left (e.g. bit 1 value is copied from bit 0). Bit 7 is copied both to bit 0 and the carry flag. Note that unlike the related RLC r instruction, RLCA always sets the zero flag to 0 without looking at the resulting value of the calculation.

```
              Carry          A register
Before        [ C ]   [b7][b6][b5][b4][b3][b2][b1][b0]

 After        [b7]    [b6][b5][b4][b3][b2][b1][b0][b7]
```

Opcode 0b00000111/0x07
Length 1 byte: opcode

Duration 1 machine cycle
Flags Z = 0, N = 0, H = 0, C = ★

Simple timing and pseudocode

```
M-cycle    —⟨      M1      ⟩—
Mem R/W    —⟨    opcode    ⟩—
```

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0x07:
  b7 = A[7]
  A = from_bits(7..1=A[6..0], 0=b7)
  flags.Z = 0
  flags.N = 0
  flags.H = 0
  flags.C = 1 if b7 else 0
```

Detailed timing and pseudocode

```
M-cycle    —⟨    M1    ⟩⟨    M2/M1    ⟩—
Addr bus   —⟨ Previous ⟩⟨    PC       ⟩—
Data bus   —⟨ IR ← mem ⟩⟨  IR ← mem   ⟩—
 IDU op    —⟨ Previous ⟩⟨ PC ← PC + 1  ⟩—
 ALU op    —⟨ Previous ⟩⟨  A ← rlc A   ⟩—
Misc op    —⟨ Previous ⟩⟨▓▓▓▓▓▓▓▓▓▓▓▓▓⟩—
```
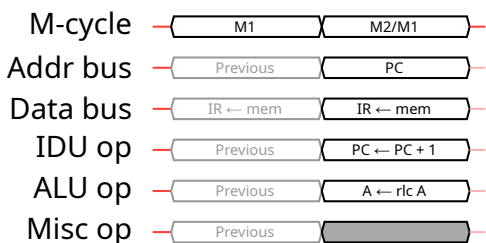
```
# M2/M1
if IR == 0x07:
  b7 = A[7]
  result = from_bits(7..1=A[6..0], 0=b7)
  A = result
  flags.Z = 0
  flags.N = 0
  flags.H = 0
  flags.C = 1 if b7 else 0
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

RRCA: Rotate right circular (accumulator)

Rotates the 8-bit A register value right in a circular manner (carry flag is updated but not used).

Every bit is shifted to the right (e.g. bit 1 value is copied to bit 0). Bit 0 is copied both to bit 7 and the carry flag. Note that unlike the related RRC r instruction, RRCA always sets the zero flag to 0 without looking at the resulting value of the calculation.

```
                   A register          Carry
Before  b7 b6 b5 b4 b3 b2 b1 b0         C

 After  b0 b7 b6 b5 b4 b3 b2 b1         b0
```

Opcode 0b00001111/0x0F
Length 1 byte: opcode

Duration 1 machine cycle
Flags Z = 0, N = 0, H = 0, C = ★

Simple timing and pseudocode

```
M-cycle    ─( M1 )─
Mem R/W    ─( opcode )─
```

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0x0F:
  b0 = A[0]
  A = from_bits(7=b0, 6..0=A[7..1])
  flags.Z = 0
  flags.N = 0
  flags.H = 0
  flags.C = 1 if b0 else 0
```

Detailed timing and pseudocode

```
M-cycle    ─( M1 )( M2/M1 )─
Addr bus   ─( Previous )( PC )─
Data bus   ─( IR ← mem )( IR ← mem )─
IDU op     ─( Previous )( PC ← PC + 1 )─
ALU op     ─( Previous )( A ← rrc A )─
Misc op    ─( Previous )(          )─
```
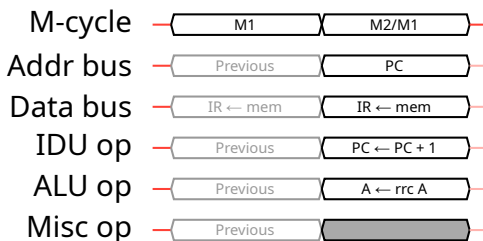
```
# M2/M1
if IR == 0x0F:
  b0 = A[0]
  result = from_bits(7=b0, 6..0=A[7..1])
  A = result
  flags.Z = 0
  flags.N = 0
  flags.H = 0
  flags.C = 1 if b0 else 0
```

RLA: Rotate left (accumulator)

Rotates the 8-bit A register value left through the carry flag.

Every bit is shifted to the left (e.g. bit 1 value is copied from bit 0). The carry flag is copied to bit 0, and bit 7 is copied to the carry flag. Note that unlike the related RL r instruction, RLA always sets the zero flag to 0 without looking at the resulting value of the calculation.

```
              Carry           A register
Before  C        b7 b6 b5 b4 b3 b2 b1 b0

After  b7        b6 b5 b4 b3 b2 b1 b0 C
```

Opcode 0b00010111/0x17
Length 1 byte: opcode

Duration 1 machine cycle
Flags Z = 0, N = 0, H = 0, C = ★

Simple timing and pseudocode

```
M-cycle    —⟨    M1    ⟩—
Mem R/W    —⟨  opcode  ⟩—
```

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0x17:
  b7 = A[7]
  A = from_bits(7..1=A[6..0], 0=flags.C)
  flags.Z = 0
  flags.N = 0
  flags.H = 0
  flags.C = 1 if b7 else 0
```

Detailed timing and pseudocode

```
M-cycle    —⟨   M1    ⟩⟨   M2/M1   ⟩—
Addr bus   —⟨ Previous ⟩⟨    PC    ⟩—
Data bus   —⟨ IR ← mem ⟩⟨ IR ← mem ⟩—
IDU op     —⟨ Previous ⟩⟨ PC ← PC + 1 ⟩—
ALU op     —⟨ Previous ⟩⟨  A ← rl A  ⟩—
Misc op    —⟨ Previous ⟩⟨          ⟩—
```
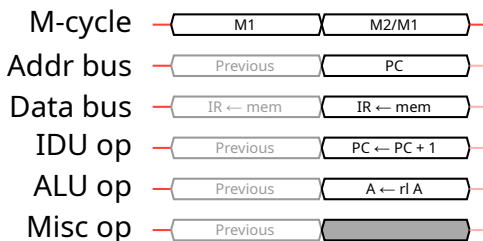
```
# M2/M1
if IR == 0x17:
  b7 = A[7]
  result = from_bits(7..1=A[6..0], 0=flags.C)
  A = result
  flags.Z = 0
  flags.N = 0
  flags.H = 0
  flags.C = 1 if b7 else 0
```

RRA: Rotate right (accumulator)

Rotates the 8-bit A register value right through the carry flag.

Every bit is shifted to the right (e.g. bit 1 value is copied to bit 0). The carry flag is copied to bit 7, and bit 0 is copied to the carry flag. Note that unlike the related RR r instruction, RRA always sets the zero flag to 0 without looking at the resulting value of the calculation.

```
                    A register              Carry
Before   b7 b6 b5 b4 b3 b2 b1 b0            C

 After   C  b7 b6 b5 b4 b3 b2 b1            b0
```

Opcode 0b00011111/0x1F
Length 1 byte: opcode

Duration 1 machine cycle
Flags Z = 0, N = 0, H = 0, C = ★

Simple timing and pseudocode

```
M-cycle   ─⟨      M1      ⟩─
Mem R/W   ─⟨    opcode    ⟩─
```

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0x1F:
  b0 = A[0]
  A = from_bits(7=flags.C, 6..0=A[7..1])
  flags.Z = 0
  flags.N = 0
  flags.H = 0
  flags.C = 1 if b0 else 0
```

Detailed timing and pseudocode

```
M-cycle   ─⟨    M1    ⟩⟨   M2/M1   ⟩─
Addr bus  ─⟨  Previous ⟩⟨    PC    ⟩─
Data bus  ─⟨ IR ← mem  ⟩⟨ IR ← mem ⟩─
  IDU op  ─⟨  Previous ⟩⟨ PC ← PC + 1 ⟩─
  ALU op  ─⟨  Previous ⟩⟨  A ← rr A  ⟩─
 Misc op  ─⟨  Previous ⟩⟨          ⟩─
```
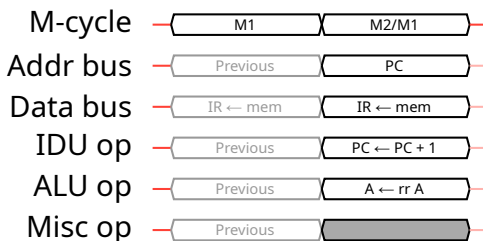
```
# M2/M1
if IR == 0x1F:
  b0 = A[0]
  result = from_bits(7=flags.C, 6..0=A[7..1])
  A = result
  flags.Z = 0
  flags.N = 0
  flags.H = 0
  flags.C = 1 if b0 else 0
```

RLC r: Rotate left circular (register)

Rotates the 8-bit register `r` value left in a circular manner (carry flag is updated but not used).

Every bit is shifted to the left (e.g. bit 1 value is copied from bit 0). Bit 7 is copied both to bit 0 and the carry flag.

Opcode 0b00000xxx/various
Length 2 bytes: CB prefix + opcode

Duration 2 machine cycles
Flags Z = ★, N = 0, H = 0, C = ★

Simple timing and pseudocode


```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xCB: # CB prefix
  opcode = read_memory(addr=PC); PC = PC + 1
  if opcode == 0x00: # example: RLC B
    b7 = B[7]
    B = from_bits(7..1=B[6..0], 0=b7)
    flags.Z = 1 if B == 0 else 0
    flags.N = 0
    flags.H = 0
    flags.C = 1 if b7 else 0
```

Detailed timing and pseudocode
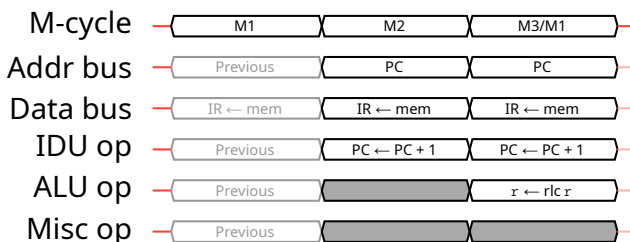

```
# M2
if IR == 0xCB:
  cb_mode = 1
  IR = fetch_cycle(addr=PC); PC = PC + 1
  # M3/M1
  if cb_mode and IR == 0x00: # example: RLC B
    b7 = B[7]
    result = from_bits(7..1=B[6..0], 0=b7)
    B = result
    flags.Z = 1 if result == 0 else 0
    flags.N = 0
    flags.H = 0
    flags.C = 1 if b7 else 0
    IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

RLC (HL): Rotate left circular (indirect HL)

Rotates, the 8-bit data at the absolute address specified by the 16-bit register HL, left in a circular manner (carry flag is updated but not used).

Every bit is shifted to the left (e.g. bit 1 value is copied from bit 0). Bit 7 is copied both to bit 0 and the carry flag.

```
            Carry      Data at address HL
Before       C      b7 b6 b5 b4 b3 b2 b1 b0

 After      b7      b6 b5 b4 b3 b2 b1 b0 b7
```

Opcode 0x06
Length 2 bytes: CB prefix + opcode

Duration 4 machine cycles
Flags Z = ★, N = 0, H = 0, C = ★

Simple timing and pseudocode

```
   M-cycle   —⟨   M1   ⟩⟨   M2   ⟩⟨   M3   ⟩⟨   M4   ⟩—
   Mem R/W   —⟨ CB prefix⟩⟨ opcode ⟩⟨ R: data ⟩⟨ W: data ⟩—
```

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xCB: # CB prefix
  opcode = read_memory(addr=PC); PC = PC + 1
  if opcode == 0x06:
    data = read_memory(addr=HL)
    b7 = data[7]
    result = from_bits(7..1=data[6..0], 0=b7)
    flags.Z = 1 if result == 0 else 0
    flags.N = 0
    flags.H = 0
    flags.C = 1 if b7 else 0
    write_memory(addr=HL, data=result)
```

Detailed timing and pseudocode

M-cycle	M1	M2	M3	M4	M5/M1
Addr bus	Previous	PC	HL	HL	PC
Data bus	IR ← mem	IR ← mem	Z ← mem	mem ← ALU	IR ← mem
IDU op	Previous	PC ← PC + 1			PC ← PC + 1
ALU op	Previous			mem ← rlc Z	
Misc op	Previous				
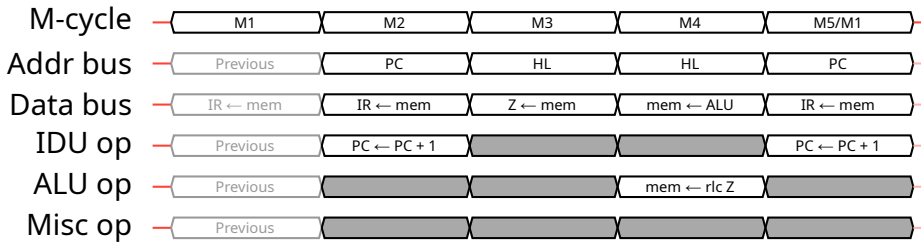
```
# M2
if IR == 0xCB:
  cb_mode = 1
  IR = fetch_cycle(addr=PC); PC = PC + 1
  # M3
  if cb_mode and IR == 0x06:
    Z = read_memory(addr=HL)
    # M4
    b7 = Z[7]
    result = from_bits(7..1=Z[6..0], 0=b7)
    flags.Z = 1 if result == 0 else 0
    flags.N = 0
    flags.H = 0
    flags.C = 1 if b7 else 0
    write_memory(addr=HL, data=result)
    # M5/M1
    IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

RRC r: Rotate right circular (register)

Rotates the 8-bit register `r` value right in a circular manner (carry flag is updated but not used).

Every bit is shifted to the right (e.g. bit 1 value is copied to bit 0). Bit 0 is copied both to bit 7 and the carry flag.

```
                    Register r           Carry
Before   b7 b6 b5 b4 b3 b2 b1 b0          C

 After   b0 b7 b6 b5 b4 b3 b2 b1         b0
```

Opcode 0b00001xxx/various
Length 2 bytes: CB prefix + opcode

Duration 2 machine cycles
Flags Z = ★, N = 0, H = 0, C = ★

Simple timing and pseudocode

```
M-cycle  ──⟨   M1   ⟩⟨   M2   ⟩──
Mem R/W  ──⟨ CB prefix ⟩⟨ opcode ⟩──
```

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xCB: # CB prefix
  opcode = read_memory(addr=PC); PC = PC + 1
  if opcode == 0x08: # example: RRC B
    b0 = B[0]
    B = from_bits(7..1=B[7..1], 0=b0)
    flags.Z = 1 if B == 0 else 0
    flags.N = 0
    flags.H = 0
    flags.C = 1 if b0 else 0
```

Detailed timing and pseudocode

```
M-cycle  ──⟨   M1   ⟩⟨   M2   ⟩⟨  M3/M1  ⟩──
Addr bus ──⟨ Previous ⟩⟨   PC   ⟩⟨   PC   ⟩──
Data bus ──⟨ IR ← mem ⟩⟨ IR ← mem ⟩⟨ IR ← mem ⟩──
 IDU op  ──⟨ Previous ⟩⟨ PC ← PC + 1 ⟩⟨ PC ← PC + 1 ⟩──
 ALU op  ──⟨ Previous ⟩⟨          ⟩⟨  r ← rrc r  ⟩──
Misc op  ──⟨ Previous ⟩⟨          ⟩⟨          ⟩──
```
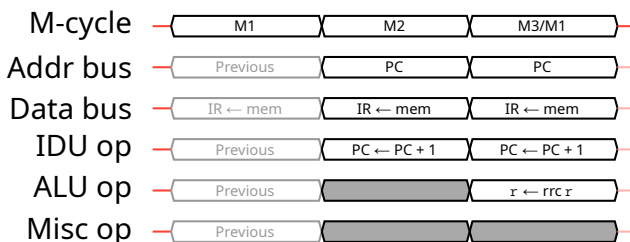
```
# M2
if IR == 0xCB:
  cb_mode = 1
  IR = fetch_cycle(addr=PC); PC = PC + 1
  # M3/M1
  if cb_mode and IR == 0x08: # example: RRC B
    b0 = B[0]
    result = from_bits(7..1=B[7..1], 0=b0)
    B = result
    flags.Z = 1 if result == 0 else 0
    flags.N = 0
    flags.H = 0
    flags.C = 1 if b0 else 0
    IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

RRC (HL): Rotate right circular (indirect HL)

Rotates, the 8-bit data at the absolute address specified by the 16-bit register HL, right in a circular manner (carry flag is updated but not used).

Every bit is shifted to the right (e.g. bit 1 value is copied to bit 0). Bit 0 is copied both to bit 7 and the carry flag.

```
              Data at address HL      Carry
Before  b7 b6 b5 b4 b3 b2 b1 b0        C

After   b0 b7 b6 b5 b4 b3 b2 b1        b0
```

Opcode 0x0E

Length 2 bytes: CB prefix + opcode

Duration 4 machine cycles

Flags Z = ★, N = 0, H = 0, C = ★

Simple timing and pseudocode

```
M-cycle  —⟨    M1    ⟩⟨    M2    ⟩⟨    M3    ⟩⟨    M4    ⟩—
Mem R/W  —⟨ CB prefix ⟩⟨  opcode  ⟩⟨  R: data ⟩⟨  W: data ⟩—
```

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xCB: # CB prefix
  opcode = read_memory(addr=PC); PC = PC + 1
  if opcode == 0x0E:
    data = read_memory(addr=HL)
    b0 = data[0]
    result = from_bits(7=b0, 6..0=data[7..1])
    flags.Z = 1 if result == 0 else 0
    flags.N = 0
    flags.H = 0
    flags.C = 1 if b0 else 0
    write_memory(addr=HL, data=result)
```

Detailed timing and pseudocode

M-cycle	M1	M2	M3	M4	M5/M1
Addr bus	Previous	PC	HL	HL	PC
Data bus	IR ← mem	IR ← mem	Z ← mem	mem ← ALU	IR ← mem
IDU op	Previous	PC ← PC + 1			PC ← PC + 1
ALU op	Previous			mem ← rrc Z	
Misc op	Previous				
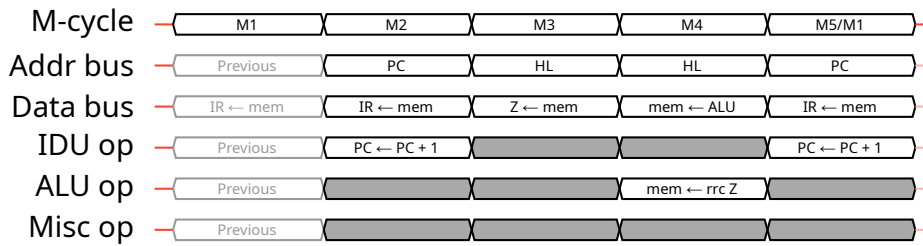
```
# M2
if IR == 0xCB:
  cb_mode = 1
  IR = fetch_cycle(addr=PC); PC = PC + 1
  # M3
  if cb_mode and IR == 0x0E:
    Z = read_memory(addr=HL)
    # M4
    b0 = Z[0]
    result = from_bits(7=b0, 6..0=Z[7..1])
    flags.Z = 1 if result == 0 else 0
    flags.N = 0
    flags.H = 0
    flags.C = 1 if b0 else 0
    write_memory(addr=HL, data=result)
    # M5/M1
    IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

RL r: Rotate left (register)

Rotates the 8-bit register `r` value left through the carry flag.

Every bit is shifted to the left (e.g. bit 1 value is copied from bit 0). The carry flag is copied to bit 0, and bit 7 is copied to the carry flag.

```
        Carry          Register r
Before   C     b7 b6 b5 b4 b3 b2 b1 b0

 After   b7     b6 b5 b4 b3 b2 b1 b0 C
```

Opcode 0b00010xxx/various
Length 2 bytes: CB prefix + opcode
Duration 2 machine cycles
Flags Z = ★, N = 0, H = 0, C = ★

Simple timing and pseudocode

```
M-cycle   ─⟨   M1   ⟩⟨   M2   ⟩─
Mem R/W   ─⟨ CB prefix ⟩⟨ opcode ⟩─
```

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xCB: # CB prefix
  opcode = read_memory(addr=PC); PC = PC + 1
  if opcode == 0x10: # example: RL B
    b7 = B[7]
    B = from_bits(7..1=B[6..0], 0=flags.C)
    flags.Z = 1 if B == 0 else 0
    flags.N = 0
    flags.H = 0
    flags.C = 1 if b7 else 0
```

Detailed timing and pseudocode

```
M-cycle  ─⟨   M1    ⟩⟨   M2    ⟩⟨  M3/M1  ⟩─
Addr bus ─⟨ Previous ⟩⟨   PC    ⟩⟨   PC    ⟩─
Data bus ─⟨ IR ← mem ⟩⟨ IR ← mem ⟩⟨ IR ← mem ⟩─
 IDU op  ─⟨ Previous ⟩⟨ PC ← PC + 1 ⟩⟨ PC ← PC + 1 ⟩─
 ALU op  ─⟨ Previous ⟩⟨          ⟩⟨  r ← rl r ⟩─
Misc op  ─⟨ Previous ⟩⟨          ⟩⟨          ⟩─
```
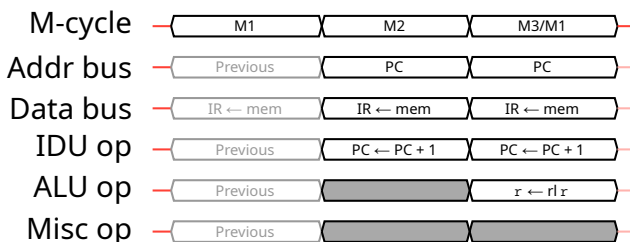
```
# M2
if IR == 0xCB:
  cb_mode = 1
  IR = fetch_cycle(addr=PC); PC = PC + 1
  # M3/M1
  if cb_mode and IR == 0x10: # example: RL B
    b7 = B[7]
    result = from_bits(7..1=B[6..0], 0=flags.C)
    B = result
    flags.Z = 1 if result == 0 else 0
    flags.N = 0
    flags.H = 0
    flags.C = 1 if b7 else 0
    IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

RL (HL): Rotate left (indirect HL)

Rotates, the 8-bit data at the absolute address specified by the 16-bit register HL, left through the carry flag.

Every bit is shifted to the left (e.g. bit 1 value is copied from bit 0). The carry flag is copied to bit 0, and bit 7 is copied to the carry flag.

Opcode 0x16
Length 2 bytes: CB prefix + opcode

Duration 4 machine cycles
Flags Z = ★, N = 0, H = 0, C = ★

Simple timing and pseudocode


```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xCB: # CB prefix
  opcode = read_memory(addr=PC); PC = PC + 1
  if opcode == 0x16:
    data = read_memory(addr=HL)
    b7 = data[7]
    result = from_bits(7..1=data[6..0], 0=flags.C)
    flags.Z = 1 if result == 0 else 0
    flags.N = 0
    flags.H = 0
    flags.C = 1 if b7 else 0
    write_memory(addr=HL, data=result)
```

Detailed timing and pseudocode

M-cycle	M1	M2	M3	M4	M5/M1
Addr bus	Previous	PC	HL	HL	PC
Data bus	IR ← mem	IR ← mem	Z ← mem	mem ← ALU	IR ← mem
IDU op	Previous	PC ← PC + 1			PC ← PC + 1
ALU op	Previous			mem ← rl Z	
Misc op	Previous				
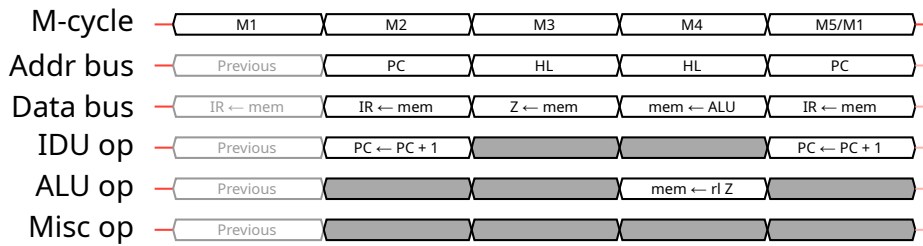
```
# M2
if IR == 0xCB:
  cb_mode = 1
  IR = fetch_cycle(addr=PC); PC = PC + 1
  # M3
  if cb_mode and IR == 0x16:
    Z = read_memory(addr=HL)
    # M4
    b7 = Z[7]
    result = from_bits(7..1=Z[6..0], 0=flags.C)
    flags.Z = 1 if result == 0 else 0
    flags.N = 0
    flags.H = 0
    flags.C = 1 if b7 else 0
    write_memory(addr=HL, data=result)
    # M5/M1
    IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

RR r: Rotate right (register)

Rotates the 8-bit register `r` value right through the carry flag.

Every bit is shifted to the right (e.g. bit 1 value is copied to bit 0). The carry flag is copied to bit 7, and bit 0 is copied to the carry flag.

Opcode 0b00011xxx/various
Length 2 bytes: CB prefix + opcode

Duration 2 machine cycles
Flags Z = ★, N = 0, H = 0, C = ★

Simple timing and pseudocode


```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xCB:  # CB prefix
  opcode = read_memory(addr=PC); PC = PC + 1
  if opcode == 0x18:  # example: RR B
    b0 = B[0]
    B = from_bits(7=flags.C, 6..0=B[7..1])
    flags.Z = 1 if B == 0 else 0
    flags.N = 0
    flags.H = 0
    flags.C = 1 if b0 else 0
```

Detailed timing and pseudocode
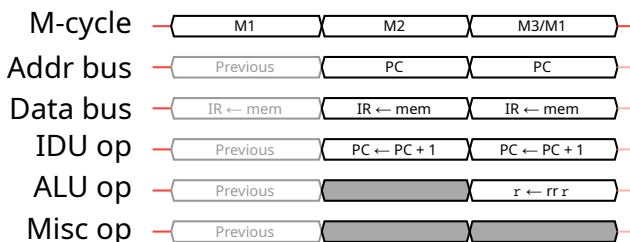

```
# M2
if IR == 0xCB:
  cb_mode = 1
  IR = fetch_cycle(addr=PC); PC = PC + 1
  # M3/M1
  if cb_mode and IR == 0x18:  # example: RR B
    b0 = B[0]
    result = from_bits(7=flags.C, 6..0=B[7..1])
    B = result
    flags.Z = 1 if result == 0 else 0
    flags.N = 0
    flags.H = 0
    flags.C = 1 if b0 else 0
    IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

RR (HL): Rotate right (indirect HL)

Rotates, the 8-bit data at the absolute address specified by the 16-bit register HL, right through the carry flag.

Every bit is shifted to the right (e.g. bit 1 value is copied to bit 0). The carry flag is copied to bit 7, and bit 0 is copied to the carry flag.

```
                Data at address HL        Carry
Before   b7 b6 b5 b4 b3 b2 b1 b0          C

After    C  b7 b6 b5 b4 b3 b2 b1          b0
```

Opcode 0x1E
Length 2 bytes: CB prefix + opcode

Duration 4 machine cycles
Flags Z = ★, N = 0, H = 0, C = ★

Simple timing and pseudocode

```
M-cycle   —⟨  M1  ⟩⟨  M2  ⟩⟨  M3  ⟩⟨  M4  ⟩—
Mem R/W   —⟨CB prefix⟩⟨ opcode ⟩⟨ R: data ⟩⟨ W: data ⟩—
```

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xCB: # CB prefix
  opcode = read_memory(addr=PC); PC = PC + 1
  if opcode == 0x1E:
    data = read_memory(addr=HL)
    b0 = data[0]
    result = from_bits(7=flags.C, 6..0=data[7..1])
    flags.Z = 1 if result == 0 else 0
    flags.N = 0
    flags.H = 0
    flags.C = 1 if b0 else 0
    write_memory(addr=HL, data=result)
```

Detailed timing and pseudocode

M-cycle	M1	M2	M3	M4	M5/M1
Addr bus	Previous	PC	HL	HL	PC
Data bus	IR ← mem	IR ← mem	Z ← mem	mem ← ALU	IR ← mem
IDU op	Previous	PC ← PC + 1			PC ← PC + 1
ALU op	Previous			mem ← rr Z	
Misc op	Previous				

```
# M2
if IR == 0xCB:
  cb_mode = 1
  IR = fetch_cycle(addr=PC); PC = PC + 1
  # M3
  if cb_mode and IR == 0x1E:
    Z = read_memory(addr=HL)
    # M4
    b0 = Z[0]
    result = from_bits(7=flags.C, 6..0=Z[7..1])
    flags.Z = 1 if result == 0 else 0
    flags.N = 0
    flags.H = 0
    flags.C = 1 if b0 else 0
    write_memory(addr=HL, data=result)
    # M5/M1
    IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

SLA r: Shift left arithmetic (register)

Shifts the 8-bit register `r` value left by one bit using an arithmetic shift.

Bit 7 is shifted to the carry flag, and bit 0 is set to a fixed value of 0.

```
            Carry        Register r
Before    [ C ]    [b7|b6|b5|b4|b3|b2|b1|b0]

 After   [b7]      [b6|b5|b4|b3|b2|b1|b0| 0 ]
```

Opcode 0b00100xxx/various
Length 2 bytes: CB prefix + opcode

Duration 2 machine cycles
Flags Z = ★, N = 0, H = 0, C = ★

Simple timing and pseudocode

```
M-cycle    ─<  M1    ><    M2    >─
Mem R/W    ─< CB prefix ><  opcode >─
```

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xCB: # CB prefix
  opcode = read_memory(addr=PC); PC = PC + 1
  if opcode == 0x20: # example: SLA B
    b7 = B[7]
    B = from_bits(7..1=B[6..0], 0=0)
    flags.Z = 1 if B == 0 else 0
    flags.N = 0
    flags.H = 0
    flags.C = 1 if b7 else 0
```

Detailed timing and pseudocode

```
M-cycle    ─<  M1   ><    M2    ><   M3/M1   >─
Addr bus   ─< Previous >< PC ><  PC  >─
Data bus   ─< IR ← mem >< IR ← mem >< IR ← mem >─
IDU op     ─< Previous >< PC ← PC + 1 >< PC ← PC + 1 >─
ALU op     ─< Previous >< ▓▓▓▓ >< r ← sla r >─
Misc op    ─< Previous >< ▓▓▓▓▓▓▓▓▓▓▓ >─
```
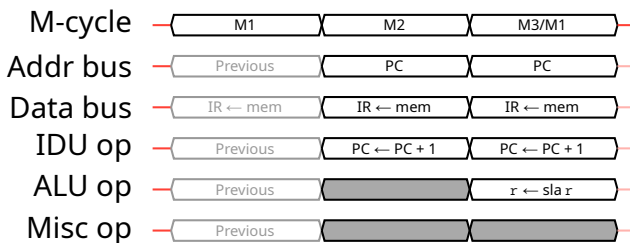
```
# M2
if IR == 0xCB:
  cb_mode = 1
  IR = fetch_cycle(addr=PC); PC = PC + 1
  # M3/M1
  if cb_mode and IR == 0x20: # example: SLA B
    b7 = B[7]
    result = from_bits(7..1=B[6..0], 0=0)
    B = result
    flags.Z = 1 if result == 0 else 0
    flags.N = 0
    flags.H = 0
    flags.C = 1 if b7 else 0
    IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

SLA (HL): Shift left arithmetic (indirect HL)

Shifts, the 8-bit value at the address specified by the HL register, left by one bit using an arithmetic shift.

Bit 7 is shifted to the carry flag, and bit 0 is set to a fixed value of 0.

```
           Carry      Data at address HL
Before     C      b7 b6 b5 b4 b3 b2 b1 b0

 After     b7        b6 b5 b4 b3 b2 b1 b0 0
```

Opcode 0x26
Length 2 bytes: CB prefix + opcode
Simple timing and pseudocode

Duration 4 machine cycles
Flags Z = ★, N = 0, H = 0, C = ★

```
M-cycle    —⟨   M1   ⟩⟨   M2   ⟩⟨   M3   ⟩⟨   M4   ⟩—
Mem R/W    —⟨ CB prefix ⟩⟨ opcode ⟩⟨ R: data ⟩⟨ W: data ⟩—
```

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xCB: # CB prefix
  opcode = read_memory(addr=PC); PC = PC + 1
  if opcode == 0x26:
    data = read_memory(addr=HL)
    b7 = data[7]
    result = from_bits(7..1=data[6..0], 0=0)
    data = result
    flags.Z = 1 if B == 0 else 0
    flags.N = 0
    flags.H = 0
    flags.C = 1 if b7 else 0
```

Detailed timing and pseudocode

M-cycle	M1	M2	M3	M4	M5/M1
Addr bus	Previous	PC	HL	HL	PC
Data bus	IR ← mem	IR ← mem	Z ← mem	mem ← ALU	IR ← mem
IDU op	Previous	PC ← PC + 1			PC ← PC + 1
ALU op	Previous			mem ← sla Z	
Misc op	Previous				
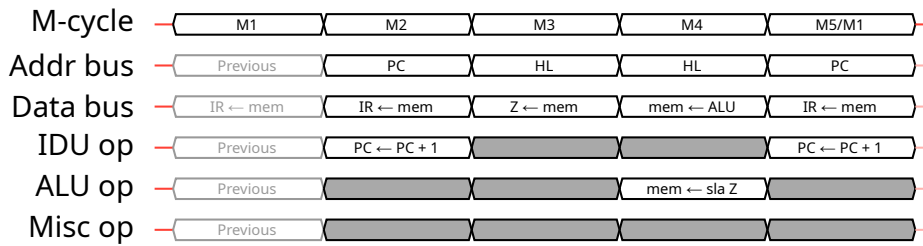
```
# M2
if IR == 0xCB:
  cb_mode = 1
  IR = fetch_cycle(addr=PC); PC = PC + 1
  # M3
  if cb_mode and IR == 0x26:
    Z = read_memory(addr=HL)
    # M4
    b7 = Z[7]
    result = from_bits(7..1=Z[6..0], 0=0)
    flags.Z = 1 if result == 0 else 0
    flags.N = 0
    flags.H = 0
    flags.C = 1 if b7 else 0
    write_memory(addr=HL, data=result)
    # M5/M1
    IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

SRA r: Shift right arithmetic (register)

Shifts the 8-bit register `r` value right by one bit using an arithmetic shift.

Bit 7 retains its value, and bit 0 is shifted to the carry flag.

```
                  Register r              Carry
Before    b7 b6 b5 b4 b3 b2 b1 b0          C

 After    b7 b7 b6 b5 b4 b3 b2 b1          b0
```

Opcode `0b00101xxx`/various
Length 2 bytes: CB prefix + opcode

Duration 2 machine cycles
Flags Z = ★, N = 0, H = 0, C = ★

Simple timing and pseudocode

```
M-cycle     ⟨   M1   ⟩⟨   M2   ⟩
Mem R/W     ⟨ CB prefix ⟩⟨ opcode ⟩
```

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xCB: # CB prefix
  opcode = read_memory(addr=PC); PC = PC + 1
  if opcode == 0x28: # example: SRA B
    b0 = B[0]
    B = from_bits(7=B[7], 6..0=B[7..1])
    flags.Z = 1 if B == 0 else 0
    flags.N = 0
    flags.H = 0
    flags.C = 1 if b0 else 0
```

Detailed timing and pseudocode

```
M-cycle     ⟨   M1   ⟩⟨   M2   ⟩⟨  M3/M1  ⟩
Addr bus    ⟨ Previous ⟩⟨   PC   ⟩⟨   PC   ⟩
Data bus    ⟨ IR ← mem ⟩⟨ IR ← mem ⟩⟨ IR ← mem ⟩
IDU op      ⟨ Previous ⟩⟨ PC ← PC + 1 ⟩⟨ PC ← PC + 1 ⟩
ALU op      ⟨ Previous ⟩⟨         ⟩⟨ r ← sra r ⟩
Misc op     ⟨ Previous ⟩⟨         ⟩⟨         ⟩
```

```
# M2
if IR == 0xCB:
  cb_mode = 1
  IR = fetch_cycle(addr=PC); PC = PC + 1
  # M3/M1
  if cb_mode and IR == 0x28: # example: SRA B
    b0 = B[0]
    result = from_bits(7=B[7], 6..0=B[7..1])
    B = result
    flags.Z = 1 if result == 0 else 0
    flags.N = 0
    flags.H = 0
    flags.C = 1 if b0 else 0
    IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

SRA (HL): Shift right arithmetic (indirect HL)

Shifts, the 8-bit value at the address specified by the HL register, right by one bit using an arithmetic shift.

Bit 7 is set to a fixed value of 0, and bit 0 is shifted to the carry flag.

```
              Data at address HL      Carry
Before  b7 b6 b5 b4 b3 b2 b1 b0        C

 After  0 b7 b6 b5 b4 b3 b2 b1         b0
```

Opcode 0x2E
Length 2 bytes: CB prefix + opcode

Duration 4 machine cycles
Flags Z = ★, N = 0, H = 0, C = ★

Simple timing and pseudocode

```
M-cycle  —⟨   M1   ⟩⟨   M2   ⟩⟨   M3   ⟩⟨   M4   ⟩—
Mem R/W  —⟨ CB prefix ⟩⟨ opcode ⟩⟨ R: data ⟩⟨ W: data ⟩—
```

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xCB: # CB prefix
  opcode = read_memory(addr=PC); PC = PC + 1
  if opcode == 0x2E:
    data = read_memory(addr=HL)
    b0 = data[0]
    result = from_bits(7=0, 6..0=data[7..1])
    data = result
    flags.Z = 1 if result == 0 else 0
    flags.N = 0
    flags.H = 0
    flags.C = 1 if b0 else 0
```

Detailed timing and pseudocode

M-cycle	M1	M2	M3	M4	M5/M1
Addr bus	Previous	PC	HL	HL	PC
Data bus	IR ← mem	IR ← mem	Z ← mem	mem ← ALU	IR ← mem
IDU op	Previous	PC ← PC + 1			PC ← PC + 1
ALU op	Previous			mem ← sra Z	
Misc op	Previous				

```
# M2
if IR == 0xCB:
  cb_mode = 1
  IR = fetch_cycle(addr=PC); PC = PC + 1
  # M3
  if cb_mode and IR == 0x2E:
    Z = read_memory(addr=HL)
    # M4
    b0 = Z[0]
    result = from_bits(7=0, 6..0=Z[7..1])
    flags.Z = 1 if result == 0 else 0
    flags.N = 0
    flags.H = 0
    flags.C = 1 if b0 else 0
    write_memory(addr=HL, data=result)
    # M5/M1
    IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

SWAP r: Swap nibbles (register)

Swaps the high and low 4-bit nibbles of the 8-bit register `r`.

```
                  Register r
Before  b7  b6  b5  b4  b3  b2  b1  b0

After   b3  b2  b1  b0  b7  b6  b5  b4
```
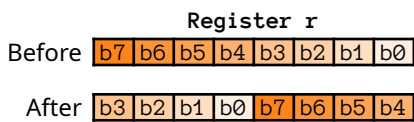
Opcode 0b00110xxx/various
Length 2 bytes: CB prefix + opcode

Duration 2 machine cycles
Flags Z = ★, N = 0, H = 0, C = 0

Simple timing and pseudocode

```
M-cycle    ⟨    M1    ⟩⟨    M2    ⟩
Mem R/W    ⟨  CB prefix ⟩⟨  opcode  ⟩
```

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xCB: # CB prefix
  opcode = read_memory(addr=PC); PC = PC + 1
  if opcode == 0x30: # example: SWAP B
    B = from_bits(7..4=B[3..0], 3..0=B[7..4])
    flags.Z = 1 if B == 0 else 0
    flags.N = 0
    flags.H = 0
    flags.C = 0
```

Detailed timing and pseudocode

```
M-cycle    ⟨   M1    ⟩⟨   M2    ⟩⟨  M3/M1   ⟩
Addr bus   ⟨ Previous ⟩⟨   PC    ⟩⟨   PC    ⟩
Data bus   ⟨ IR ← mem ⟩⟨ IR ← mem ⟩⟨ IR ← mem ⟩
IDU op     ⟨ Previous ⟩⟨ PC ← PC + 1 ⟩⟨ PC ← PC + 1 ⟩
ALU op     ⟨ Previous ⟩⟨          ⟩⟨ r ← swap r ⟩
Misc op    ⟨ Previous ⟩⟨          ⟩⟨          ⟩
```
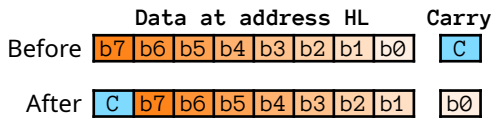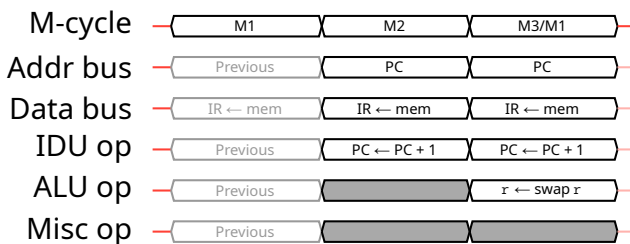
```
# M2
if IR == 0xCB:
  cb_mode = 1
  IR = fetch_cycle(addr=PC); PC = PC + 1
  # M3/M1
  if cb_mode and IR == 0x30: # example: SWAP B
    result = from_bits(7..4=B[3..0], 3..0=B[7..4])
    B = result
    flags.Z = 1 if result == 0 else 0
    flags.N = 0
    flags.H = 0
    flags.C = 0
    IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

SWAP (HL): Swap nibbles (indirect HL)

Swaps the high and low 4-bit nibbles of the 8-bit data at the absolute address specified by the 16-bit register HL.

```
              Data at address HL
Before   b7 b6 b5 b4 b3 b2 b1 b0

After    b3 b2 b1 b0 b7 b6 b5 b4
```
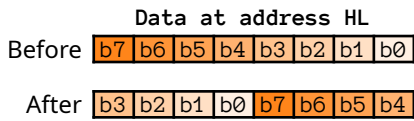
Opcode 0x36
Length 2 bytes: CB prefix + opcode

Duration 4 machine cycles
Flags Z = ★, N = 0, H = 0, C = 0

Simple timing and pseudocode

M-cycle	M1	M2	M3	M4
Mem R/W	CB prefix	opcode	R: data	W: data

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xCB:  # CB prefix
  opcode = read_memory(addr=PC); PC = PC + 1
  if opcode == 0x36:
    data = read_memory(addr=HL)
    result = from_bits(7..4=data[3..0], 3..0=data[7..4])
    flags.Z = 1 if result == 0 else 0
    flags.N = 0
    flags.H = 0
    flags.C = 0
    write_memory(addr=HL, data=result)
```

Detailed timing and pseudocode

M-cycle	M1	M2	M3	M4	M5/M1
Addr bus	Previous	PC	HL	HL	PC
Data bus	IR ← mem	IR ← mem	Z ← mem	mem ← ALU	IR ← mem
IDU op	Previous	PC ← PC + 1			PC ← PC + 1
ALU op	Previous			mem ← swap Z	
Misc op	Previous				
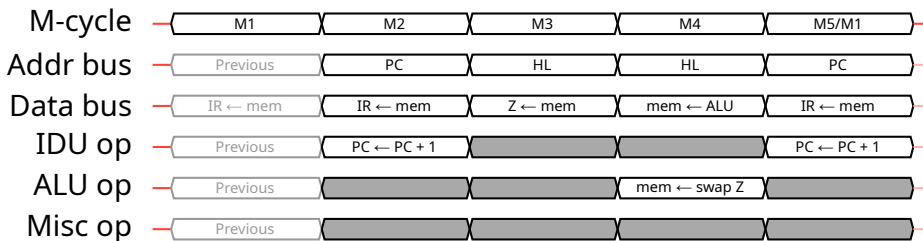
```
# M2
if IR == 0xCB:
  cb_mode = 1
  IR = fetch_cycle(addr=PC); PC = PC + 1
  # M3
  if cb_mode and IR == 0x36:
    Z = read_memory(addr=HL)
    # M4
    result = from_bits(7..4=Z[3..0], 3..0=Z[7..4])
    flags.Z = 1 if result == 0 else 0
    flags.N = 0
    flags.H = 0
    flags.C = 0
    write_memory(addr=HL, data=result)
    # M5/M1
    IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

SRL r: Shift right logical (register)

Shifts the 8-bit register `r` value right by one bit using a logical shift.

Bit 7 is set to a fixed value of 0, and bit 0 is shifted to the carry flag.

Opcode `0b00111xxx`/various
Length 2 bytes: CB prefix + opcode
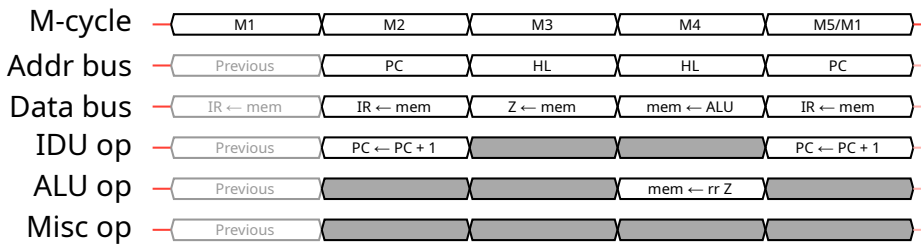
Duration 2 machine cycles
Flags Z = ★, N = 0, H = 0, C = ★

Simple timing and pseudocode


```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xCB: # CB prefix
  opcode = read_memory(addr=PC); PC = PC + 1
  if opcode == 0x28: # example: SRL B
    b0 = B[0]
    B = from_bits(7=0, 6..0=B[7..1])
    flags.Z = 1 if B == 0 else 0
    flags.N = 0
    flags.H = 0
    flags.C = 1 if b0 else 0
```

Detailed timing and pseudocode
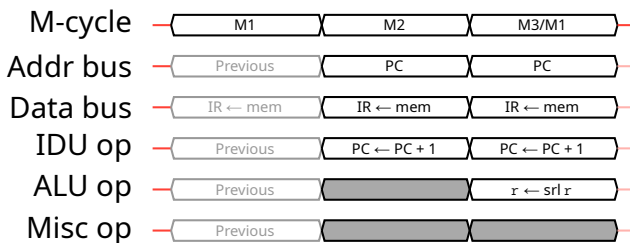

```
# M2
if IR == 0xCB:
  cb_mode = 1
  IR = fetch_cycle(addr=PC); PC = PC + 1
  # M3/M1
  if cb_mode and IR == 0x28: # example: SRL B
    b0 = B[0]
    result = from_bits(7=0, 6..0=B[7..1])
    B = result
    flags.Z = 1 if result == 0 else 0
    flags.N = 0
    flags.H = 0
    flags.C = 1 if b0 else 0
    IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

SRL (HL): Shift right logical (indirect HL)

Shifts, the 8-bit value at the address specified by the HL register, right by one bit using a logical shift.

Bit 7 is set to a fixed value of 0, and bit 0 is shifted to the carry flag.

```
              Data at address HL      Carry
Before  b7 b6 b5 b4 b3 b2 b1 b0        C

After   0  b7 b6 b5 b4 b3 b2 b1       b0
```

Opcode 0x3E
Length 2 bytes: CB prefix + opcode

Duration 4 machine cycles
Flags Z = ★, N = 0, H = 0, C = ★

Simple timing and pseudocode

```
M-cycle  —  M1        M2        M3        M4
Mem R/W  —  CB prefix opcode    R: data   W: data
```

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xCB: # CB prefix
  opcode = read_memory(addr=PC); PC = PC + 1
  if opcode == 0x3E:
    data = read_memory(addr=HL)
    b0 = data[0]
    result = from_bits(7=0, 6..0=data[7..1])
    flags.Z = 1 if result == 0 else 0
    flags.N = 0
    flags.H = 0
    flags.C = 1 if b0 else 0
    write_memory(addr=HL, data=result)
```

Detailed timing and pseudocode

M-cycle	M1	M2	M3	M4	M5/M1
Addr bus	Previous	PC	HL	HL	PC
Data bus	IR ← mem	IR ← mem	Z ← mem	mem ← ALU	IR ← mem
IDU op	Previous	PC ← PC + 1			PC ← PC + 1
ALU op	Previous			mem ← srl Z	
Misc op	Previous				
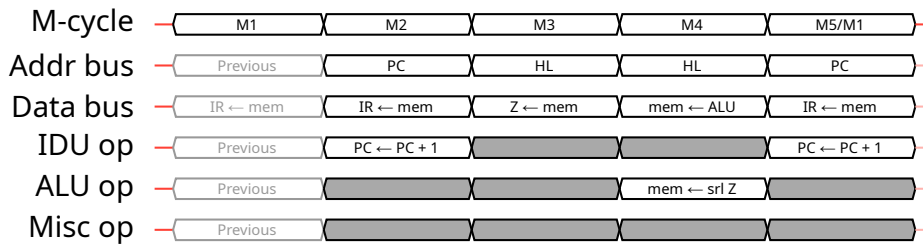
```
# M2
if IR == 0xCB:
  cb_mode = 1
  IR = fetch_cycle(addr=PC); PC = PC + 1
  # M3
  if cb_mode and IR == 0x3E:
    Z = read_memory(addr=HL)
    # M4
    b0 = Z[0]
    result = from_bits(7=0, 6..0=Z[7..1])
    flags.Z = 1 if result == 0 else 0
    flags.N = 0
    flags.H = 0
    flags.C = 1 if b0 else 0
    write_memory(addr=HL, data=result)
    # M5/M1
    IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```
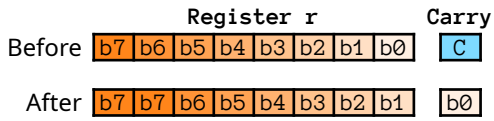
BIT b, r: Test bit (register)

Tests the bit b of the 8-bit register r.

The zero flag is set to 1 if the chosen bit is 0, and 0 otherwise.

Opcode 0b01xxxxxx/various
Length 2 bytes: CB prefix + opcode

Duration 2 machine cycles
Flags Z = ★, N = 0, H = 1

Simple timing and pseudocode

M-cycle	M1	M2
Mem R/W	CB prefix	opcode

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xCB: # CB prefix
  opcode = read_memory(addr=PC); PC = PC + 1
  if opcode == 0x40: # example: BIT 0, B
    flags.Z = 1 if B[0] == 0 else 0
    flags.N = 0
    flags.H = 1
```

Detailed timing and pseudocode

M-cycle	M1	M2	M3/M1
Addr bus	Previous	PC	PC
Data bus	IR ← mem	IR ← mem	IR ← mem
IDU op	Previous	PC ← PC + 1	PC ← PC + 1
ALU op	Previous		bit b, r
Misc op	Previous		
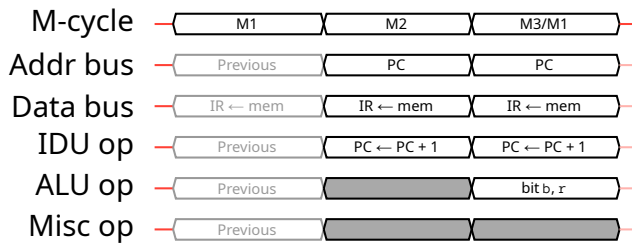
```
# M2
if IR == 0xCB:
  cb_mode = 1
  IR = fetch_cycle(addr=PC); PC = PC + 1
  # M3/M1
  if cb_mode and IR == 0x40: # example: BIT 0, B
    flags.Z = 1 if B[0] == 0 else 0
    flags.N = 0
    flags.H = 1
    IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

BIT b, (HL): Test bit (indirect HL)

Tests the bit b of the 8-bit data at the absolute address specified by the 16-bit register HL.

The zero flag is set to 1 if the chosen bit is 0, and 0 otherwise.

Opcode 0b01xxx110/various **Duration** 3 machine cycles
Length 2 bytes: CB prefix + opcode **Flags** Z = ★, N = 0, H = 1

Simple timing and pseudocode

M-cycle	M1	M2	M3
Mem R/W	CB prefix	opcode	R: data

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xCB: # CB prefix
  opcode = read_memory(addr=PC); PC = PC + 1
  if opcode == 0x46: # example: BIT 0, (HL)
    data = read_memory(addr=HL)
    flags.Z = 1 if data[0] == 0 else 0
    flags.N = 0
    flags.H = 1
```

Detailed timing and pseudocode

M-cycle	M1	M2	M3	M4/M1
Addr bus	Previous	PC	HL	PC
Data bus	IR ← mem	IR ← mem	Z ← mem	IR ← mem
IDU op	Previous	PC ← PC + 1		PC ← PC + 1
ALU op	Previous			bit b, Z
Misc op	Previous			
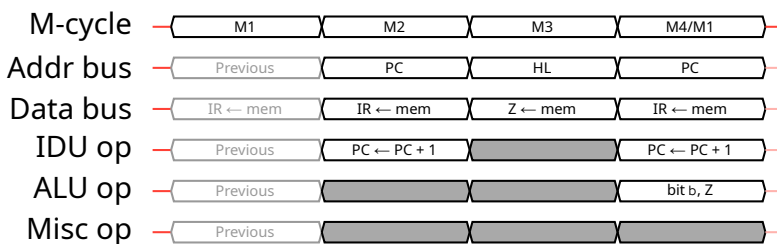
```
# M2
if IR == 0xCB:
  cb_mode = 1
  IR = fetch_cycle(addr=PC); PC = PC + 1
  # M3
  if cb_mode and IR == 0x46: # example: BIT 0, (HL)
    Z = read_memory(addr=HL)
    # M4/M1
    flags.Z = 1 if Z[0] == 0 else 0
    flags.N = 0
    flags.H = 1
    IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

RES b, r: Reset bit (register)

Resets the bit b of the 8-bit register r to 0.

Opcode 0b10xxxxxx/various   **Duration** 2 machine cycles
Length 2 bytes: CB prefix + opcode   **Flags** -
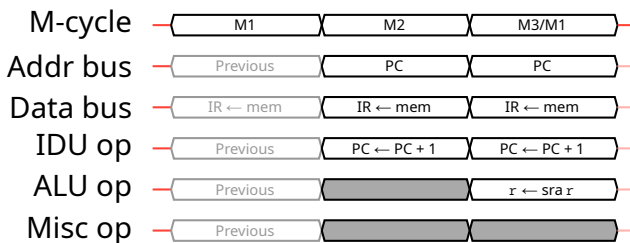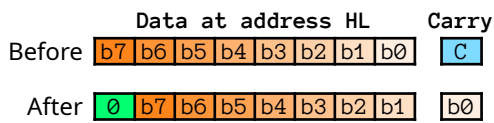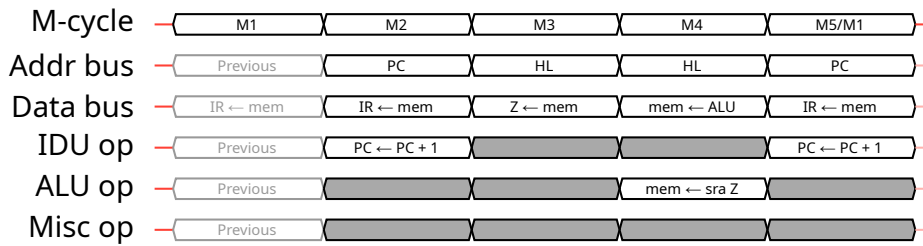**Simple timing and pseudocode**


```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xCB: # CB prefix
  opcode = read_memory(addr=PC); PC = PC + 1
  if opcode == 0x80: # example: RES 0, B
    B = from_bits(7..1=B[7..1], 0=0)
```

Detailed timing and pseudocode
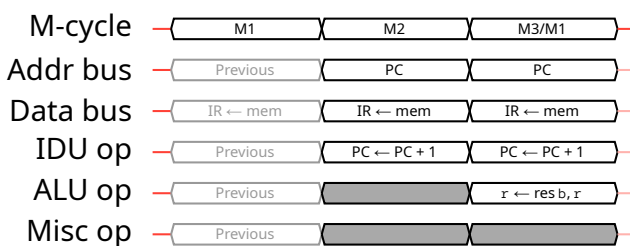

```
# M2
if IR == 0xCB:
  cb_mode = 1
  IR = fetch_cycle(addr=PC); PC = PC + 1
  # M3/M1
  if cb_mode and IR == 0x80: # example: RES 0, B
    B = from_bits(7..1=B[7..1], 0=0)
    IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

RES b, (HL): Reset bit (indirect HL)

Resets the bit b of the 8-bit data at the absolute address specified by the 16-bit register HL, to 0.

Opcode 0b10xxx110/various   **Duration** 4 machine cycles
Length 2 bytes: CB prefix + opcode   **Flags**   -
Simple timing and pseudocode

M-cycle	M1	M2	M3	M4
Mem R/W	CB prefix	opcode	R: data	W: data

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xCB: # CB prefix
  opcode = read_memory(addr=PC); PC = PC + 1
  if opcode == 0x86: # example: RES 0, (HL)
    data = read_memory(addr=HL)
    result = from_bits(7..1=data[7..1], 0=0)
    write_memory(addr=HL, data=result)
```

Detailed timing and pseudocode

M-cycle	M1	M2	M3	M4	M5/M1
Addr bus	Previous	PC	HL	HL	PC
Data bus	IR ← mem	IR ← mem	Z ← mem	mem ← ALU	IR ← mem
IDU op	Previous	PC ← PC + 1			PC ← PC + 1
ALU op	Previous			mem ← res b, Z	
Misc op	Previous				
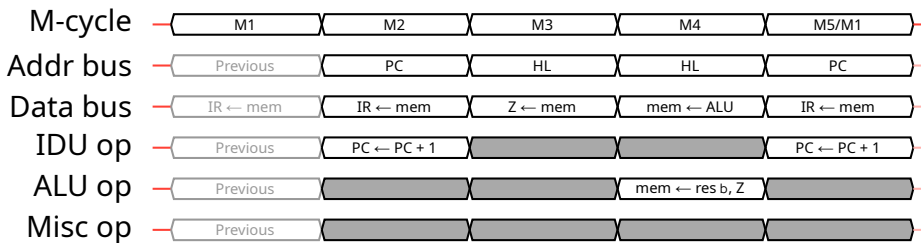
```
# M2
if IR == 0xCB:
  cb_mode = 1
  IR = fetch_cycle(addr=PC); PC = PC + 1
  # M3
  if cb_mode and IR == 0x86: # example: RES 0, (HL)
    Z = read_memory(addr=HL)
    # M4
    result = from_bits(7..1=Z[7..1], 0=0)
    write_memory(addr=HL, data=result)
    # M5/M1
    IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

SET b, r: Set bit (register)

Sets the bit b of the 8-bit register r to 1.

Opcode 0b11xxxxxx/various   **Duration** 2 machine cycles
Length 2 bytes: CB prefix + opcode   **Flags**   -
Simple timing and pseudocode

```
M-cycle  ─<    M1    ><    M2    >─
Mem R/W  ─<  CB prefix  ><  opcode  >─
```

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xCB: # CB prefix
  opcode = read_memory(addr=PC); PC = PC + 1
  if opcode == 0xC0: # example: SET 0, B
    B = from_bits(7..1=B[7..1], 0=1)
```

Detailed timing and pseudocode

```
M-cycle  ─<   M1    ><   M2    ><  M3/M1  >─
Addr bus ─< Previous ><   PC    ><   PC    >─
Data bus ─< IR ← mem >< IR ← mem >< IR ← mem >─
 IDU op  ─< Previous >< PC ← PC + 1 >< PC ← PC + 1 >─
 ALU op  ─< Previous ><        ><  r ← set b, r >─
Misc op  ─< Previous ><        ><        >─
```
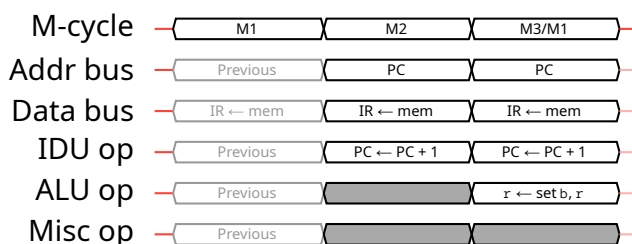
```
# M2
if IR == 0xCB:
  cb_mode = 1
  IR = fetch_cycle(addr=PC); PC = PC + 1
  # M3/M1
  if cb_mode and IR == 0xC0: # example: SET 0, B
    B = from_bits(7..1=B[7..1], 0=1)
    IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

SET b, (HL): Set bit (indirect HL)

Sets the bit b of the 8-bit data at the absolute address specified by the 16-bit register HL, to 1.

Opcode `0b11xxx110/various`   **Duration** 4 machine cycles
Length 2 bytes: CB prefix + opcode   **Flags**   -
Simple timing and pseudocode

M-cycle	M1	M2	M3	M4
Mem R/W	CB prefix	opcode	R: data	W: data

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xCB: # CB prefix
  opcode = read_memory(addr=PC); PC = PC + 1
  if opcode == 0xC6: # example: SET 0, (HL)
    data = read_memory(addr=HL)
    result = from_bits(7..1=data[7..1], 0=1)
    write_memory(addr=HL, data=result)
```

Detailed timing and pseudocode

M-cycle	M1	M2	M3	M4	M5/M1
Addr bus	Previous	PC	HL	HL	PC
Data bus	IR ← mem	IR ← mem	Z ← mem	mem ← ALU	IR ← mem
IDU op	Previous	PC ← PC + 1			PC ← PC + 1
ALU op	Previous			mem ← set b, Z	
Misc op	Previous				
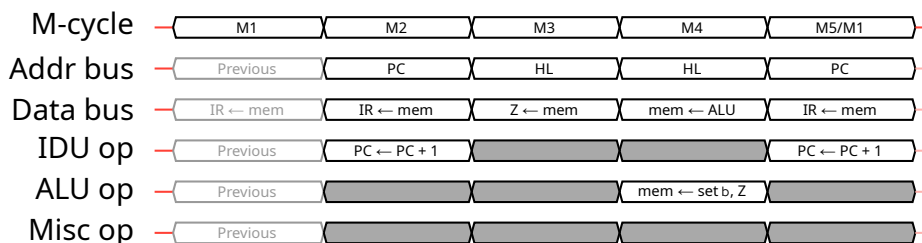
```
# M2
if IR == 0xCB:
  cb_mode = 1
  IR = fetch_cycle(addr=PC); PC = PC + 1
  # M3
  if cb_mode and IR == 0xC6: # example: SET 0, (HL)
    Z = read_memory(addr=HL)
    # M4
    result = from_bits(7..1=Z[7..1], 0=1)
    write_memory(addr=HL, data=result)
    # M5/M1
    IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

6.7 Control flow instructions

JP nn: Jump

Unconditional jump to the absolute address specified by the 16-bit immediate operand nn.

Opcode 0b11000011/0xC3   **Duration** 4 machine cycles
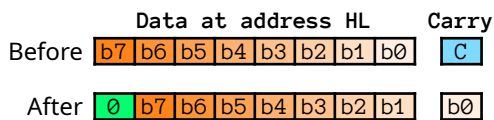**Length** 3 bytes: opcode + LSB(nn) + MSB(nn)   **Flags**   -
Simple timing and pseudocode


```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xC3:
  nn_lsb = read_memory(addr=PC); PC = PC + 1
  nn_msb = read_memory(addr=PC); PC = PC + 1
  nn = unsigned_16(lsb=nn_lsb, msb=nn_msb)
  PC = nn
```

Detailed timing and pseudocode
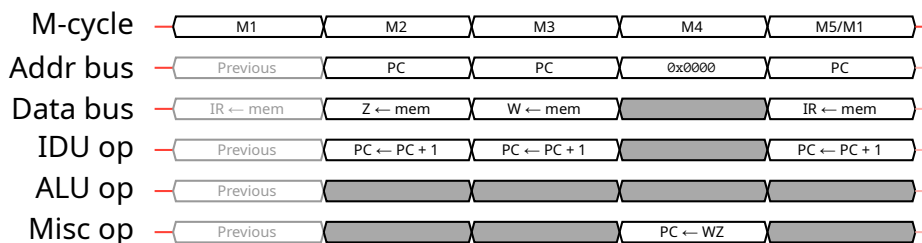

```
# M2
if IR == 0xC3:
  Z = read_memory(addr=PC); PC = PC + 1
  # M3
  W = read_memory(addr=PC); PC = PC + 1
  # M4
  PC = WZ
  # M5/M1
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

JP HL: Jump to HL

Unconditional jump to the absolute address specified by the 16-bit register HL.

Opcode 0b11101001/0xE9   **Duration** 1 machine cycle
Length 1 byte: opcode   **Flags**   -

Simple timing and pseudocode

M-cycle ─⟨ M1 ⟩─

Mem R/W ─⟨ opcode ⟩─

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xE9:
  PC = HL
```

Detailed timing and pseudocode

M-cycle ─⟨ M1 ⟩⟨ M2/M1 ⟩─
Addr bus ─⟨ Previous ⟩⟨ HL ⟩─
Data bus ─⟨ IR ← mem ⟩⟨ IR ← mem ⟩─
IDU op ─⟨ Previous ⟩⟨ PC ← HL + 1 ⟩─
ALU op ─⟨ Previous ⟩▨─
Misc op ─⟨ Previous ⟩▨─

```
# M2/M1
if IR == 0xE9:
  IR, intr = fetch_cycle(addr=HL); PC = HL + 1
```

JP cc, nn: Jump (conditional)

Conditional jump to the absolute address specified by the 16-bit operand `nn`, depending on the condition `cc`.

Note that the operand (absolute address) is read even when the condition is false!

Opcode `0b110xx010`/various   **Duration** 4 machine cycles (cc=true)
                                                3 machine cycles (cc=false)

Length 3 bytes: opcode + LSB(nn) + MSB(nn)   **Flags** -

Simple timing and pseudocode
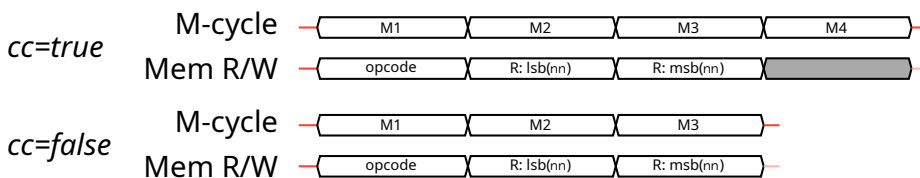

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xC2: # example: JP NZ, nn
  nn_lsb = read_memory(addr=PC); PC = PC + 1
  nn_msb = read_memory(addr=PC); PC = PC + 1
  nn = unsigned_16(lsb=nn_lsb, msb=nn_msb)
  if !flags.Z: # cc=true
    PC = nn
```

Detailed timing and pseudocode

cc=true

M-cycle	M1	M2	M3	M4	M5/M1
Addr bus	Previous	PC	PC	0x0000	PC
Data bus	IR ← mem	Z ← mem	W ← mem		IR ← mem
IDU op	Previous	PC ← PC + 1	PC ← PC + 1		PC ← PC + 1
ALU op	Previous				
Misc op	Previous		cc check	PC ← WZ	

cc=false

M-cycle	M1	M2	M3	M4/M1
Addr bus	Previous	PC	PC	PC
Data bus	IR ← mem	Z ← mem	W ← mem	IR ← mem
IDU op	Previous	PC ← PC + 1	PC ← PC + 1	PC ← PC + 1
ALU op	Previous			
Misc op	Previous		cc check	
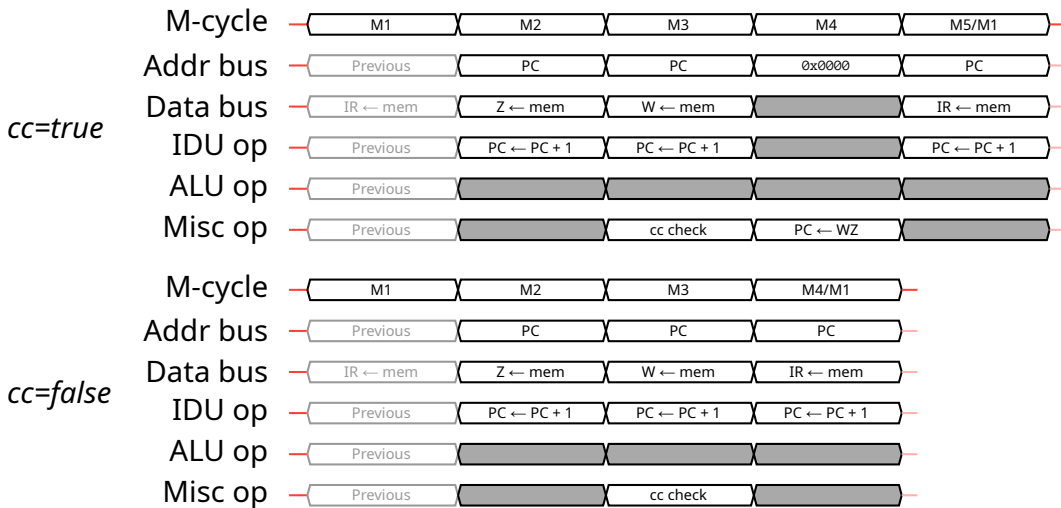
```
# M2
if IR == 0xC2: # example: JP NZ, nn
  Z = read_memory(addr=PC); PC = PC + 1
  # M3
  W = read_memory(addr=PC); PC = PC + 1
  if !flags.Z: # cc=true
    # M4
    PC = WZ
    # M5/M1
    IR, intr = fetch_cycle(addr=PC); PC = PC + 1
  else: # cc=false
    # M4/M1
    IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

JR e: Relative jump

Unconditional jump to the relative address specified by the signed 8-bit operand e.

Opcode 0b00011000/0x18   **Duration** 3 machine cycles
Length 2 bytes: opcode + e   **Flags** -

Simple timing and pseudocode


```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0x18:
  e = signed_8(read_memory(addr=PC)); PC = PC + 1
  PC = PC + e
```

Detailed timing and pseudocode
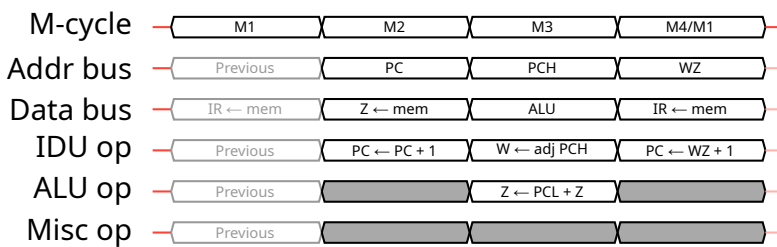

```
# M2
if IR == 0x18:
  Z = read_memory(addr=PC); PC = PC + 1
  # M3
  Z_sign = bit(7, Z)
  result, carry_per_bit = Z + lsb(PC)
  Z = result
  adj = 1 if carry_per_bit[7] and not Z_sign else
       -1 if not carry_per_bit[7] and Z_sign else
        0
  W = msb(PC) + adj
  # M4/M1
  IR, intr = fetch_cycle(addr=WZ); PC = WZ + 1
```

JR cc, e: Relative jump (conditional)

Conditional jump to the relative address specified by the signed 8-bit operand `e`, depending on the condition `cc`.

Note that the operand (relative address offset) is read even when the condition is false!

Opcode `0b001xx000`/various   **Duration** 3 machine cycles (cc=true)
                                                     2 machine cycles (cc=false)

Length 2 bytes: opcode + `e`   **Flags**   -

Simple timing and pseudocode

cc=true

M-cycle	M1	M2	M3
Mem R/W	opcode	R: e	

cc=false

M-cycle	M1	M2
Mem R/W	opcode	R: e
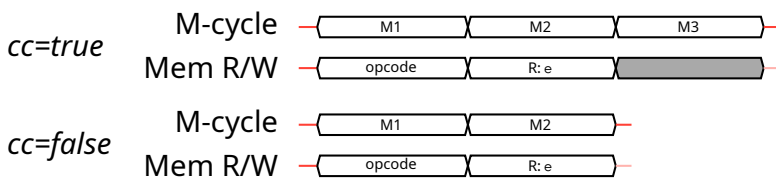
```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0x20:
  e = signed_8(read_memory(addr=PC)); PC = PC + 1
  if !flags.Z: # cc=true
    PC = PC + e
```

Detailed timing and pseudocode

cc=true

M-cycle	M1	M2	M3	M4/M1
Addr bus	Previous	PC	PCH	WZ
Data bus	IR ← mem	Z ← mem	ALU	IR ← mem
IDU op	Previous	PC ← PC + 1	W ← adj PCH	PC ← WZ + 1
ALU op	Previous		Z ← PCL + Z	
Misc op	Previous	cc check		

cc=false

M-cycle	M1	M2	M3/M1
Addr bus	Previous	PC	PC
Data bus	IR ← mem	Z ← mem	IR ← mem
IDU op	Previous	PC ← PC + 1	PC ← PC + 1
ALU op	Previous		
Misc op	Previous	cc check	
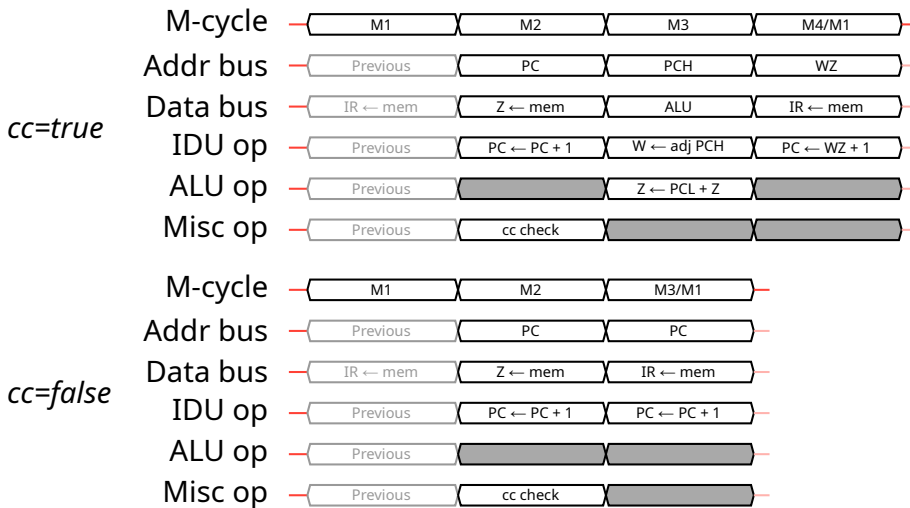
```
# M2
if IR == 0x20:
  Z = read_memory(addr=PC); PC = PC + 1
  if !flags.Z: # cc=true
    # M3
    Z_sign = bit(7, Z)
    result, carry_per_bit = Z + lsb(PC)
    Z = result
    adj = 1 if carry_per_bit[7] and not Z_sign else
         -1 if not carry_per_bit[7] and Z_sign else
          0
    W = msb(PC) + adj
    # M4/M1
    IR, intr = fetch_cycle(addr=WZ); PC = WZ + 1
  else: # cc=false
    # M3/M1
    IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

CALL nn: Call function

Unconditional function call to the absolute address specified by the 16-bit operand nn.

Opcode 0b11001101/0xCD **Duration** 6 machine cycles
Length 3 bytes: opcode + LSB(nn) + MSB(nn) **Flags** -

Simple timing and pseudocode

M-cycle	M1	M2	M3	M4	M5	M6
Mem R/W	opcode	R: lsb(nn)	R: msb(nn)		W: msb(PC$_0$+3)	W: lsb(PC$_0$+3)

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xCD:
  nn_lsb = read_memory(addr=PC); PC = PC + 1
  nn_msb = read_memory(addr=PC); PC = PC + 1
  nn = unsigned_16(lsb=nn_lsb, msb=nn_msb)
  SP = SP - 1
  write_memory(addr=SP, data=msb(PC)); SP = SP - 1
  write_memory(addr=SP, data=lsb(PC))
  PC = nn
```

Detailed timing and pseudocode

M-cycle	M1	M2	M3	M4	M5	M6	M7/M1
Addr bus	Previous	PC	PC	SP	SP	SP	PC
Data bus	IR ← mem	Z ← mem	W ← mem		mem ← PCH	mem ← PCL	IR ← mem
IDU op	Previous	PC ← PC + 1	PC ← PC + 1	SP ← SP - 1	SP ← SP - 1	SP ← SP	PC ← PC + 1
ALU op	Previous						
Misc op	Previous					PC ← WZ	
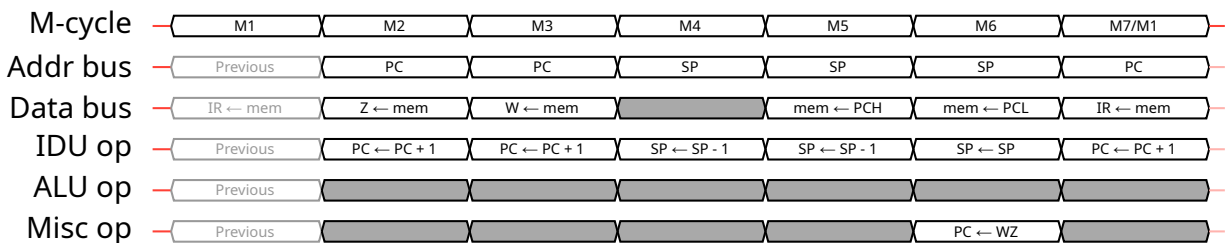
```
# M2
if IR == 0xCD:
  Z = read_memory(addr=PC); PC = PC + 1
  # M3
  W = read_memory(addr=PC); PC = PC + 1
  # M4
  SP = SP - 1
  # M5
  write_memory(addr=SP, data=msb(PC)); SP = SP - 1
  # M6
  write_memory(addr=SP, data=lsb(PC)); PC = WZ
  # M7/M1
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

CALL cc, nn: Call function (conditional)

Conditional function call to the absolute address specified by the 16-bit operand nn, depending on the condition cc.

Note that the operand (absolute address) is read even when the condition is false!

Opcode 0b110xx100/various   **Duration** 6 machine cycles (cc=true)
                                                    3 machine cycles (cc=false)

Length 3 bytes: opcode + LSB(nn) + MSB(nn) **Flags**   -

Simple timing and pseudocode
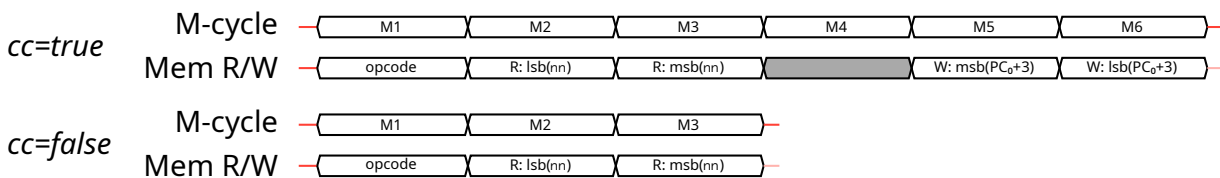

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xC4: # example: CALL NZ, nn
  nn_lsb = read_memory(addr=PC); PC = PC + 1
  nn_msb = read_memory(addr=PC); PC = PC + 1
  nn = unsigned_16(lsb=nn_lsb, msb=nn_msb)
  if !flags.Z: # cc=true
    SP = SP - 1
    write_memory(addr=SP, data=msb(PC)); SP = SP - 1
    write_memory(addr=SP, data=lsb(PC))
    PC = nn
```

Detailed timing and pseudocode

cc=true

M-cycle	M1	M2	M3	M4	M5	M6	M7/M1
Addr bus	Previous	PC	PC	SP	SP	SP	PC
Data bus	IR ← mem	Z ← mem	W ← mem		mem ← PCH	mem ← PCL	IR ← mem
IDU op	Previous	PC ← PC + 1	PC ← PC + 1	SP ← SP - 1	SP ← SP - 1	SP ← SP	PC ← PC + 1
ALU op	Previous						
Misc op	Previous		cc check			PC ← WZ	

cc=false

M-cycle	M1	M2	M3	M4/M1
Addr bus	Previous	PC	PC	PC
Data bus	IR ← mem	Z ← mem	W ← mem	IR ← mem
IDU op	Previous	PC ← PC + 1	PC ← PC + 1	PC ← PC + 1
ALU op	Previous			
Misc op	Previous		cc check	
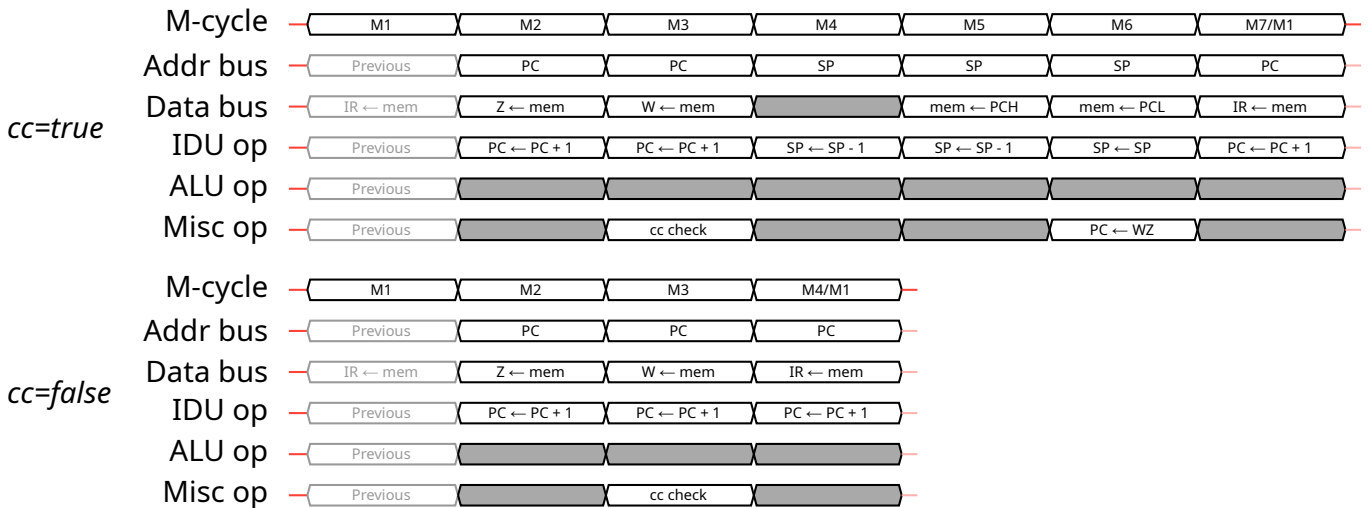
```
# M2
if IR == 0xC4: # example: CALL NZ, nn
  Z = read_memory(addr=PC); PC = PC + 1
  # M3
  W = read_memory(addr=PC); PC = PC + 1
  if !flags.Z: # cc=true
    # M4
    SP = SP - 1
    # M5
    write_memory(addr=SP, data=msb(PC)); SP = SP - 1
    # M6
    write_memory(addr=SP, data=lsb(PC)); PC = WZ
    # M7/M1
    IR, intr = fetch_cycle(addr=PC); PC = PC + 1
  else: # cc=false
    # M4/M1
    IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

RET: Return from function

Unconditional return from a function.

Opcode 0b11001001/0xC9   **Duration** 4 machine cycles
Length 1 byte: opcode   **Flags** -

Simple timing and pseudocode

M-cycle	M1	M2	M3	M4
Mem R/W	opcode	R: lsb(PC)	R: msb(PC)	

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xC9:
  lsb = read_memory(addr=SP); SP = SP + 1
  msb = read_memory(addr=SP); SP = SP + 1
  PC = unsigned_16(lsb=lsb, msb=msb)
```

Detailed timing and pseudocode

M-cycle	M1	M2	M3	M4	M5/M1
Addr bus	Previous	SP	SP	0x0000	PC
Data bus	IR ← mem	Z ← mem	W ← mem		IR ← mem
IDU op	Previous	SP ← SP + 1	SP ← SP + 1		PC ← PC + 1
ALU op	Previous				
Misc op	Previous			PC ← WZ	
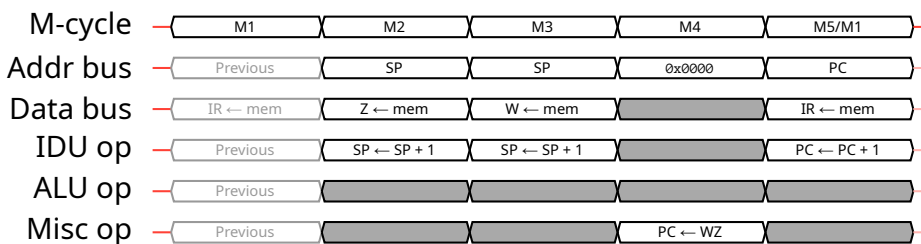
```
# M2
if IR == 0xC9:
  Z = read_memory(addr=SP); SP = SP + 1
  # M3
  W = read_memory(addr=SP); SP = SP + 1
  # M4
  PC = WZ
  # M5/M1
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

RET cc: Return from function (conditional)

Conditional return from a function, depending on the condition `cc`.

Opcode `0b110xx000/various`   **Duration** 5 machine cycles (cc=true)
                                              2 machine cycles (cc=false)

Length 1 byte: opcode   **Flags**   -

Simple timing and pseudocode


```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xC0: # example: RET NZ
  if !flags.Z: # cc=true
    lsb = read_memory(addr=SP); SP = SP + 1
    msb = read_memory(addr=SP); SP = SP + 1
    PC = unsigned_16(lsb=lsb, msb=msb)
```

Detailed timing and pseudocode
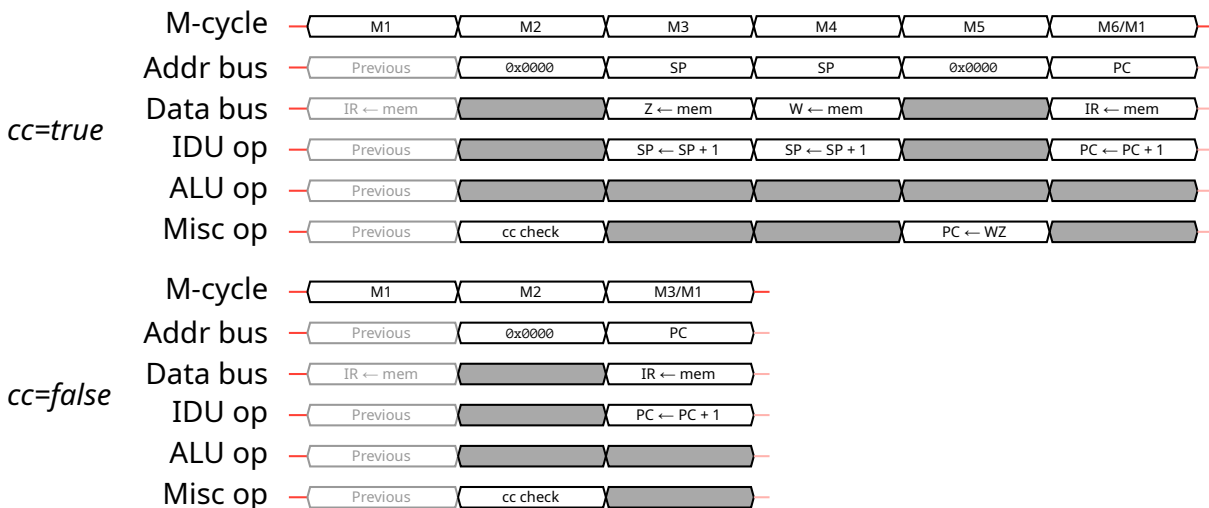

```
# M2
if IR == 0xC0: # example: RET NZ
  if !flags.Z: # cc=true
    # M3
    Z = read_memory(addr=SP); SP = SP + 1
    # M4
    W = read_memory(addr=SP); SP = SP + 1
    # M5
    PC = WZ
    # M6/M1
    IR, intr = fetch_cycle(addr=PC); PC = PC + 1
  else: # cc=false
    # M3
    IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

RETI: Return from interrupt handler

Unconditional return from a function. Also enables interrupts by setting IME=1.

Opcode 0b11011001/0xD9   **Duration** 4 machine cycles
Length 1 byte: opcode   **Flags** -

Simple timing and pseudocode

M-cycle — M1 | M2 | M3 | M4

Mem R/W — opcode | R: lsb(PC) | R: msb(PC) |

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xD9:
  lsb = read_memory(addr=SP); SP = SP + 1
  msb = read_memory(addr=SP); SP = SP + 1
  PC = unsigned_16(lsb=lsb, msb=msb)
  IME = 1
```

Detailed timing and pseudocode

M-cycle	M1	M2	M3	M4	M5/M1
Addr bus	Previous	SP	SP	0x0000	PC
Data bus	IR ← mem	Z ← mem	W ← mem		IR ← mem
IDU op	Previous	SP ← SP + 1	SP ← SP + 1		PC ← PC + 1
ALU op	Previous				
Misc op	Previous			PC ← WZ, IME ← 1	
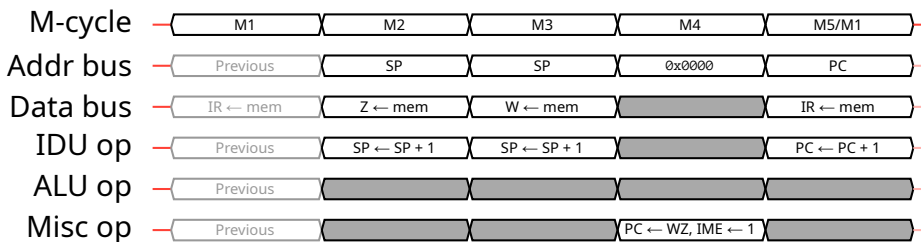
```
# M2
if IR == 0xD9:
  Z = read_memory(addr=SP); SP = SP + 1
  # M3
  W = read_memory(addr=SP); SP = SP + 1
  # M4
  PC = WZ; IME = 1
  # M5/M1
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

RST n: Restart / Call function (implied)

Unconditional function call to the absolute fixed address defined by the opcode.

Opcode `0b11xxx111`/various   **Duration** 4 machine cycles
Length 1 byte: opcode   **Flags** -
Simple timing and pseudocode

M-cycle	M1	M2	M3	M4
Mem R/W	opcode		W: msb PC	W: lsb PC

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xDF: # example: RST 0x18
  n = 0x18
  SP = SP – 1
  write_memory(addr=SP, data=msb(PC)); SP = SP – 1
  write_memory(addr=SP, data=lsb(PC))
  PC = unsigned_16(lsb=n, msb=0x00)
```

Detailed timing and pseudocode

M-cycle	M1	M2	M3	M4	M5/M1
Addr bus	Previous	SP	SP	SP	PC
Data bus	IR ← mem		mem ← PCH	mem ← PCL	IR ← mem
IDU op	Previous	SP ← SP - 1	SP ← SP - 1	SP ← SP	PC ← PC + 1
ALU op	Previous				
Misc op	Previous			PC ← addr	
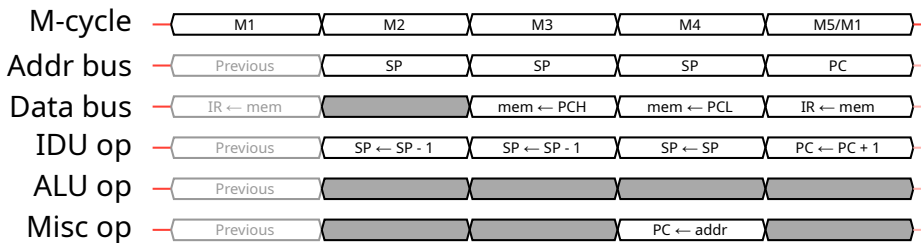
```
# M2
if IR == 0xDF: # example: RST 0x18
  SP = SP – 1
  # M3
  write_memory(addr=SP, data=msb(PC)); SP = SP – 1
  # M4
  write_memory(addr=SP, data=lsb(PC)); PC = 0x0018
  # M5/M1
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

6.8 Miscellaneous instructions

HALT: Halt system clock

TODO

STOP: Stop system and main clocks

TODO

DI: Disable interrupts

Disables interrupt handling by setting IME=0 and cancelling any scheduled effects of the EI instruction if any.

Opcode 0b11110011/0xF3 **Duration** 1 machine cycle
Length 1 byte: opcode **Flags** -

Simple timing and pseudocode

```
M-cycle   ─⟨     M1     ⟩─
Mem R/W   ─⟨   opcode   ⟩─
```

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xF3:
  IME = 0
```

Detailed timing and pseudocode

```
M-cycle   ─⟨   M1    ⟩⟨   M2/M1   ⟩─
Addr bus  ─⟨ Previous ⟩⟨    PC     ⟩─
Data bus  ─⟨ IR ← mem ⟩⟨ IR ← mem  ⟩─
IDU op    ─⟨ Previous ⟩⟨ PC ← PC + 1⟩─
ALU op    ─⟨ Previous ⟩⟨███████████⟩─
Misc op   ─⟨ Previous ⟩⟨  IME ← 0  ⟩─
```
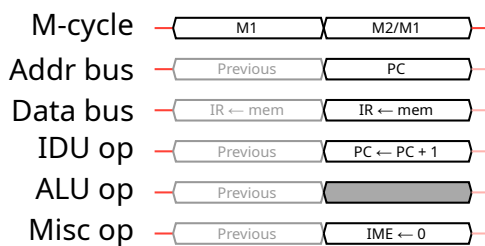
```
# M2/M1
if IR == 0xF3:
  # interrupt checking is suppressed so fetch_cycle(..) is not used
  IR = read_memory(addr=PC); PC = PC + 1; IME = 0
```

EI: Enable interrupts

Schedules interrupt handling to be enabled after the next machine cycle.

Opcode 0b11111011/0xFB **Duration** 1 machine cycle
Length 1 byte: opcode **Flags** -

Simple timing and pseudocode

M-cycle —〈 M1 〉—
Mem R/W —〈 opcode 〉—

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0xFB:
  IME_next = 1
```

Detailed timing and pseudocode

M-cycle —〈 M1 〉〈 M2/M1 〉—
Addr bus —〈 Previous 〉〈 PC 〉—
Data bus —〈 IR ← mem 〉〈 IR ← mem 〉—
IDU op —〈 Previous 〉〈 PC ← PC + 1 〉—
ALU op —〈 Previous 〉〈 〉—
Misc op —〈 Previous 〉〈 IME ← 1 〉—

```
# M2/M1
if IR == 0xFB:
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1; IME = 1
```

NOP: No operation

No operation. This instruction doesn't do anything, but can be used to add a delay of one machine cycle and increment PC by one.

Opcode 0b00000000/0x00   **Duration** 1 machine cycle
Length 1 byte: opcode   **Flags** -

Simple timing and pseudocode

M-cycle — M1 —
Mem R/W — opcode —

```
opcode = read_memory(addr=PC); PC = PC + 1
if opcode == 0x00:
  # nothing
```

Detailed timing and pseudocode

M-cycle — M1 | M2/M1 —
Addr bus — Previous | PC —
Data bus — IR ← mem | IR ← mem —
IDU op — Previous | PC ← PC + 1 —
ALU op — Previous | —
Misc op — Previous | —
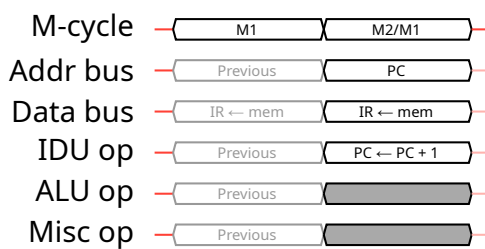
```
# M2/M1
if IR == 0x00:
  IR, intr = fetch_cycle(addr=PC); PC = PC + 1
```

Part III

Game Boy SoC peripherals and features

Chapter 7
Boot ROM

The Game Boy SoC includes a small embedded boot ROM, which can be mapped to the `0x0000–0x00FF` memory area. While mapped, all reads from this area are handled by the boot ROM instead of the external cartridge, and all writes to this area are ignored and cannot be seen by external hardware (e.g. the cartridge MBC).

The boot ROM is enabled by default, so when the system exits the reset state and the CPU starts execution from address `0x0000`, it executes the boot ROM instead of instructions from the cartridge ROM. The boot ROM is responsible for showing the initial logo, and checking that a valid cartridge is inserted into the system. If the cartridge is valid, the boot ROM unmaps itself before execution of the cartridge ROM starts at `0x0100`. The cartridge ROM has no chance of executing any instructions before the boot ROM is unmapped, which prevents the boot ROM from being read byte by byte in normal conditions.

> **⚠ Warning**
>
> Don't confuse the boot ROM with the additional SNES ROM in SGB/SGB2 that is executed by the SNES CPU.

Register 7.1: `0xFF50` - BOOT - Boot ROM lock register

U	U	U	U	U	U	U	R/W–0
							BOOT_OFF
bit 7	6	5	4	3	2	1	bit 0

bit 7-1 **Unimplemented**: Ignored during writes, reads are undefined

bit 0 **BOOT_OFF**: Boot ROM lock bit
`0b1` = Boot ROM is disabled and `0x0000–0x00FF` works normally.
`0b0` = Boot ROM is active and intercepts accesses to `0x0000–0x00FF`.

BOOT_OFF can only transition from `0b0` to `0b1`, so once `0b1` has been written, the boot ROM is permanently disabled until the next system reset. Writing `0b0` when BOOT_OFF is `0b0` has no effect and doesn't lock the boot ROM.

The 1-bit BOOT register controls mapping of the boot ROM. Once `0b1` has been written to it to unmap the boot ROM, it can only be mapped again by resetting the system.

7.1 Boot ROM types

Type	CRC32	MD5	SHA1
DMG	59c8598e	32fbbd84168d3482956eb3c5051637f5	4ed31ec6b0b175bb109c0eb5fd3d193da823339f
MGB	e6920754	71a378e71ff30b2d8a1f02bf5c7896aa	4e68f9da03c310e84c523654b9026e51f26ce7f0
SGB	ec8a83b9	d574d4f9c12f305074798f54c091a8b4	aa2f50a77dfb4823da96ba99309085a3c6278515
SGB2	53d0dd63	e0430bca9925fb9882148fd2dc2418c1	93407ea10d2f30ab96a314d8eca44fe160aea734
DMG0	c2f5cc97	a8f84a0ac44da5d3f0ee19f9cea80a8c	8bd501e31921e9601788316dbd3ce9833a97bcbc

Table 7.1: Summary of boot ROM file hashes

DMG boot ROM

The most common boot ROM is the DMG boot ROM used in almost all original Game Boy units. If a valid cartridge is inserted, the boot ROM scrolls a logo to the center of the screen, and plays a "di-ding" sound recognizable by most people who have used Game Boy consoles.

This boot ROM was originally dumped by neviksti in 2003 by decapping the Game Boy SoC and visually inspecting every single bit.

MGB boot ROM

This boot ROM was originally dumped by Bennvenn in 2014 by using a simple clock glitching method that only requires one wire.

SGB boot ROM

This boot ROM was originally dumped by Costis Sideris in 2009 by using an FPGA-based clock glitching method [4].

SGB2 boot ROM

This boot ROM was originally dumped by gekkio in 2015 by using a Teensy 3.1 -based clock glitching method [5].

Early DMG boot ROM ("DMG0")

Very early original Game Boy units released in Japan (often called "DMG0") included the launch version "DMG-CPU" SoC chip, which used a different boot ROM than later units.

This boot ROM was originally dumped by gekkio in 2016 by using a clock glitching method invented by BennVenn.

136

Chapter 8
DMA (Direct Memory Access)

8.1 Object Attribute Memory (OAM) DMA

OAM DMA is a high-throughput mechanism for copying data to the OAM area (a.k.a. Object Attribute Memory, a.k.a. sprite memory). It can copy one byte per machine cycle without involving the CPU at all, which is much faster than the fastest possible `memcpy` routine that can be written with the SM83 instruction set. However, a transfer cannot be cancelled and the transfer length cannot be controlled, so the DMA transfer always updates the entire OAM area (= 160 bytes) even if you actually want to just update the first couple of bytes.

The Game Boy CPU chip contains a DMA controller that coordinates transfers between a **source area** and the **OAM area** independently of the CPU. While a transfer is in progress, it takes control of the source bus and the OAM area, so some precaution is needed with memory accesses (including instruction fetches) to avoid OAM DMA bus conflicts. OAM DMA uses a different address decoding scheme than normal memory accesses, so the source bus is always either the external bus or the video RAM bus, and the contents normally visible to the CPU in the `0xFE00–0xFFFF` address range cannot be used as a source for OAM DMA transfers.

The upper 8 bits of the OAM DMA source address are stored in the DMA register, while the lower 8 bits used by both the source and target address are stored in the DMA controller and are not accessible directly. A transfer always begins with `0x00` in the lower bits and copies exactly 160 bytes, so the lower bits are never in the `0xA0–0xFF` range.

Writing to the DMA register updates the upper bits of the DMA source address and also triggers an OAM DMA transfer request, although the DMA transfer does not begin immediately.

Register 8.1: `0xFF46` - DMA - OAM DMA control register

R/W–x	R/W–x	R/W–x	R/W–x	R/W–x	R/W–x	R/W–x	R/W–x
DMA<7:0>							
bit 7	6	5	4	3	2	1	bit 0

bit 7-0   DMA<7:0>: OAM DMA source address
Specifies the top 8 bits of the OAM DMA source address.

Writing to this register requests an OAM DMA transfer, but it's just a request and the actual DMA transfer starts with a delay.

Reading this register returns the value that was previously written to the register. The stored value is not cleared on reset, so the initial value before the first write is unknown and should not be relied on.

> ⚠ **Warning**
>
> Avoid writing `0xE0–0xFF` to the DMA register, because some poorly designed flash carts can trigger bus conflicts or other dangerous behaviour.

OAM DMA address decoding

The OAM DMA controller uses a simplified address decoding scheme, which leads to some addresses being unusable as source addresses. Unlike normal memory accesses, OAM DMA transfers interpret all accesses in the `0xA000–0xFFFF` range as external RAM transfers. For example, if the OAM DMA wants to read `0xFF00`, it will output `0xFF00` on the external address bus and will assert the external RAM chip select signal. The P1 register which is normally at `0xFF00` is not involved at all, because OAM DMA address decoding only uses the external bus and the video RAM bus. Instead, the resulting behaviour depends on several factors, including the connected cartridge. Some flash carts are not prepared for this unexpected scenario, and a bus conflict or worse behaviour can happen.

DMA register value	Used bus	Asserted chip select signal
`0x00–0x7F`	external bus	external ROM (A15)
`0x80–0x9F`	video RAM bus	video RAM (MCS)
`0xA0–0xFF`	external bus	external RAM (CS)

Table 8.1: OAM DMA address decoding scheme

OAM DMA transfer timing

TODO

OAM DMA bus conflicts

TODO

Chapter 9
PPU (Picture Processing Unit)

Register 9.1: `0xFF40` - LCDC - PPU control register

R/W–0	R/W–0	R/W–0	R/W–0	R/W–0	R/W–0	R/W–0	R/W–0
LCD_EN	WIN_MAP	WIN_EN	TILE_SEL	BG_MAP	OBJ_SIZE	OBJ_EN	BG_EN
bit 7	6	5	4	3	2	1	bit 0

Register 9.2: `0xFF41` - STAT - PPU status register

U	R/W–0	R/W–0	R/W–0	R/W–0	R–0	R–0	R–0
	INTR_LYC	INTR_M2	INTR_M1	INTR_M0	LYC_STAT	LCD_MODE<1:0>	
bit 7	6	5	4	3	2	1	bit 0

Register 9.3: `0xFF42` - SCY - Vertical scroll register

R/W–0	R/W–0	R/W–0	R/W–0	R/W–0	R/W–0	R/W–0	R/W–0
SCY<7:0>							
bit 7	6	5	4	3	2	1	bit 0

Register 9.4: `0xFF43` - SCX - Horizontal scroll register

R/W–0	R/W–0	R/W–0	R/W–0	R/W–0	R/W–0	R/W–0	R/W–0
SCX<7:0>							
bit 7	6	5	4	3	2	1	bit 0

Register 9.5: `0xFF44` - LY - Scanline register

R–0	R–0	R–0	R–0	R–0	R–0	R–0	R–0
LY<7:0>							
bit 7	6	5	4	3	2	1	bit 0

Register 9.6: `0xFF45` - LYC - Scanline compare register

R/W–0	R/W–0	R/W–0	R/W–0	R/W–0	R/W–0	R/W–0	R/W–0
LYC<7:0>							
bit 7	6	5	4	3	2	1	bit 0

Chapter 10
Port P1 (Joypad, Super Game Boy communication)

Register 10.1: `0xFF00` - P1 - Joypad/Super Game Boy communication register

U	U	W—0	W—0	R—x	R—x	R—x	R—x
		P15	P14	P13	P12	P11	P10
bit 7	6	5	4	3	2	1	bit 0

bit 7-6　**Unimplemented**: Ignored during writes, reads are undefined

bit 5　**P15**

bit 4　**P14**

bit 3　**P13**

bit 2　**P12**

bit 1　**P11**

bit 0　**P10**

Chapter 11
Serial communication

Register 11.1: `0xFF01` - SB - Serial data register

R/W–0	R/W–0	R/W–0	R/W–0	R/W–0	R/W–0	R/W–0	R/W–0
SB<7:0>							
bit 7	6	5	4	3	2	1	bit 0

bit 7-0   SB<7:0>: Serial data

Register 11.2: `0xFF02` - SC - Serial control register

R/W–0	U	U	U	U	U	U	R/W–0
SIO_EN							SIO_CLK
bit 7	6	5	4	3	2	1	bit 0

bit 7   SIO_EN

bit 6-1   Unimplemented: Ignored during writes, reads are undefined

bit 0   SIO_CLK

Part IV

Game Boy game cartridges

Chapter 12
MBC1 mapper chip

The majority of games for the original Game Boy use the MBC1 chip. MBC1 supports ROM sizes up to 16 Mbit (128 banks of `0x4000` bytes) and RAM sizes up to 256 Kbit (4 banks of `0x2000` bytes). The information in this section is based on my MBC1 research, Tauwasser's research notes [6], and Pan Docs [7].

12.1 MBC1 registers

> **ⓘ Caveat**
>
> These registers don't have any standard names and are usually referred to using their address ranges or purposes instead. This document uses names to clarify which register is meant when referring to one.

The MBC1 chip includes four registers that affect the behaviour of the chip. Of the cartridge bus address signals, only A13-A15 are connected to the MBC, so lower address bits don't matter when the CPU is accessing the MBC and all registers are effectively mapped to address ranges instead of single addresses. All registers are smaller than 8 bits, and unused bits are simply ignored during writes. The registers are not directly readable.

Register 12.1: `0x0000–0x1FFF` - RAMG - MBC1 RAM gate register

U	U	U	U	W–0	W–0	W–0	W–0
				RAMG<3:0>			
bit 7	6	5	4	3	2	1	bit 0

bit 7-4 **Unimplemented**: Ignored during writes

bit 3-0 **RAMG<3:0>**: RAM gate register
`0b1010` = enable access to chip RAM
All other values disable access to chip RAM

The RAMG register is used to enable access to the cartridge SRAM if one exists on the cartridge circuit board. RAM access is disabled by default but can be enabled by writing to the `0x0000–0x1FFF` address range a value with the bit pattern `0b1010` in the lower nibble. Upper bits don't matter, but any other bit pattern in the lower nibble disables access to RAM.

When RAM access is disabled, all writes to the external RAM area `0xA000–0xBFFF` are ignored, and reads return undefined values. Pan Docs recommends disabling RAM when it's not being accessed to protect the contents [7].

Register 12.2: `0x2000–0x3FFF` - BANK1 - MBC1 bank register 1

U	U	U	W–0	W–0	W–0	W–0	W–1
			BANK1<4:0>				
bit 7	6	5	4	3	2	1	bit 0

bit 7-5 **Unimplemented**: Ignored during writes

bit 4-0 **BANK1<4:0>**: Bank register 1
Never contains the value `0b00000`.
If `0b00000` is written, the resulting value will be `0b00001` instead.

The 5-bit BANK1 register is used as the lower 5 bits of the ROM bank number when the CPU accesses the `0x4000–0x7FFF` memory area.

MBC1 doesn't allow the BANK1 register to contain zero (bit pattern `0b00000`), so the initial value at reset is `0b00001` and attempting to write `0b00000` will write `0b00001` instead. This makes it impossible to read banks `0x00`, `0x20`, `0x40` and `0x60` from the `0x4000–0x7FFF` memory area, because those bank numbers have `0b00000` in the lower bits. Due to the zero value adjustment, requesting any of these banks actually requests the next bank (e.g. `0x21` instead of `0x20`).

Register 12.3: `0x4000–0x5FFF` - BANK2 - MBC1 bank register 2

U	U	U	U	U	U	W–0	W–0
						BANK2<1:0>	
bit 7	6	5	4	3	2	1	bit 0

bit 7-2 **Unimplemented**: Ignored during writes

bit 1-0 **BANK2<1:0>**: Bank register 2

The 2-bit BANK2 register can be used as the upper bits of the ROM bank number, or as the 2-bit RAM bank number. Unlike BANK1, BANK2 doesn't disallow zero, so all 2-bit values are possible.

Register 12.4: `0x6000–0x7FFF` - MODE - MBC1 mode register

U	U	U	U	U	U	U	W–0
							MODE
bit 7	6	5	4	3	2	1	bit 0

bit 7-1 Unimplemented: Ignored during writes

bit 0   MODE: Mode register
        `0b1` = BANK2 affects accesses to `0x0000–0x3FFF`, `0x4000–0x7FFF`, `0xA000–0xBFFF`
        `0b0` = BANK2 affects only accesses to `0x4000–0x7FFF`

The MODE register determines how the BANK2 register value is used during memory accesses.

> ⊘ **Warning**
>
> Most documentation, including Pan Docs [7], calls value `0b0` ROM banking mode, and value `0b1` RAM banking mode. This terminology reflects the common use cases, but "RAM banking" is slightly misleading because value `0b1` also affects ROM reads in multicart cartridges and cartridges that have a 8 or 16 Mbit ROM chip.

12.2 ROM in the `0x0000–0x7FFF` area

In MBC1 cartridges, the A0-A13 cartridge bus signals are connected directly to the corresponding ROM pins, and the remaining ROM pins (A14-A20) are controlled by the MBC1. These remaining pins form the ROM bank number.

When the `0x0000–0x3FFF` address range is accessed, the effective bank number depends on the MODE register. In MODE `0b0` the bank number is always 0, but in MODE `0b1` it's formed by shifting the BANK2 register value left by 5 bits.

When the `0x4000–0x7FFF` addess range is accessed, the effective bank number is always a combination of BANK1 and BANK2 register values.

If the cartridge ROM is smaller than 16 Mbit, there are less ROM address pins to connect to and therefore some bank number bits are ignored. For example, 4 Mbit ROMs only need a 5-bit bank number, so the BANK2 register value is always ignored because those bits are simply not connected to the ROM.

Accessed address	ROM address bits		
	Bank number		Address within bank
	20-19	18-14	13-0
`0x0000–0x3FFF`, MODE = `0b0`	0b00	0b00000	A<13:0>
`0x0000–0x3FFF`, MODE = `0b1`	BANK2	0b00000	A<13:0>
`0x4000–0x7FFF`	BANK2	BANK1	A<13:0>

Table 12.1: Mapping of physical ROM address bits in MBC1 carts

ROM banking example 1

Let's assume we have previously written `0x12` to the BANK1 register and `0b01` to the BANK2 register. The effective bank number during ROM reads depends on which address range we read and on the value of the MODE register:

Value of the BANK 1 register	0b10010
Value of the BANK 2 register	0b01
Effective ROM bank number (reading `0x4000–0x7FFF`)	0b0110010 (= 50 = 0x32)
Effective ROM bank number (reading `0x0000–0x3FFF`, **MODE = 0b0**)	0b0000000 (= 0 = 0x00)
Effective ROM bank number (reading `0x0000–0x3FFF`, **MODE = 0b1**)	0b0100000 (= 32 = 0x20)

ROM banking example 2

Let's assume we have previously requested ROM bank number 68, MBC1 mode is `0b0`, and we are now reading a byte from `0x72A7`. The actual physical ROM address that will be read is going to be `0x1132A7` and is constructed in the following way:

Value of the BANK 1 register	0b00100
Value of the BANK 2 register	0b10
ROM bank number	0b1000100 (= 68 = 0x44)
Address being read	0b0111 0010 1010 0111 (= 0x72A7)
Actual physical ROM address	0b1 0001 0011 0010 1010 0111 (= 0x1132A7)

12.3 RAM in the `0xA000–0xBFFF` area

Some MBC1 carts include SRAM, which is mapped to the `0xA000–0xBFFF` area. If no RAM is present, or RAM is not enabled with the RAMG register, all reads return undefined values and writes have no effect.

On boards that have RAM, the A0-A12 cartridge bus signals are connected directly to the corresponding RAM pins, and pins A13-A14 are controlled by the MBC1. Most of the time the RAM size is 64 Kbit, which corresponds to a single bank of `0x2000` bytes. With larger RAM sizes the BANK2 register value can be used for RAM banking to provide the two high address bits.

In MODE `0b0` the BANK2 register value is not used, so the first RAM bank is always mapped to the `0xA000–0xBFFF` area. In MODE `0b1` the BANK2 register value is used as the bank number.

	RAM address bits	
Accessed address	Bank number	Address within bank
	14-13	12-0
`0xA000–0xBFFF`, MODE = `0b0`	0b00	A<12:0>
`0xA000–0xBFFF`, MODE = `0b1`	BANK2	A<12:0>

Table 12.2: Mapping of physical RAM address bits in MBC1 carts

RAM banking example 1

Let's assume we have previously written `0b10` to the BANK2 register, MODE is `0b1`, RAMG is `0b1010` and we are now reading a byte from `0xB123`. The actual physical RAM address that will be read is going to be `0x5123` and is constructed in the following way:

Value of the BANK 2 register	0b**10**
Address being read	0b1011 0001 0010 0011 (= 0xB123)
Actual physical RAM address	0b**101** 0001 0010 0011 (= 0x5123)

12.4 MBC1 multicarts ("MBC1M")

MBC1 is also used in a couple of "multicart" cartridges, which include more than one game on the same cartridge. These cartridges use the same regular MBC1 chip, but the circuit board is wired a bit differently. This alternative wiring is sometimes called "MBC1M", but technically the mapper chip is the same. All known MBC1 multicarts use 8 Mbit ROMs, so there's no definitive wiring for other ROM sizes.

In MBC1 multicarts bit 4 of the BANK1 register is not physically connected to anything, so it's skipped. This means that the bank number is actually a 6-bit number. In all known MBC1 multi-carts the games reserve 16 banks each, so BANK2 can actually be considered "game number", while BANK1 is the internal bank number within the selected game. At reset BANK2 is 0b00, and the "game" in this slot is actually a game selection menu. The menu code selects MODE 0b1 and writes the game number to BANK2 once the user selects a game.

From a ROM banking point of view, multicarts simply skip bit 4 of the BANK1 register, but otherwise the behaviour is the same. MODE 0b1 guarantees that all ROM accesses, including accesses to 0x0000-0x3FFF, use the BANK2 register value.

Accessed address	ROM address bits		
	Bank number		Address within bank
	19-18	17-14	13-0
0x0000-0x3FFF, MODE = 0b0	0b00	0b0000	A<13:0>
0x0000-0x3FFF, MODE = 0b1	BANK2	0b0000	A<13:0>
0x4000-0x7FFF	BANK2	BANK1<3:0>	A<13:0>

Table 12.3: Mapping of physical ROM address bits in MBC1 multicarts

ROM banking example 1

Let's assume we have previously requested "game number" 3 (= 0b11) and ROM bank number 29 (= 0x1D), MBC1 mode is 0b1, and we are now reading a byte from 0x6C15. The actual physical ROM address that will be read is going to be 0xF6C15 and is constructed in the following way:

Value of the BANK 1 register	0b1**1101**
Value of the BANK 2 register	0b**11**
ROM bank number	0b**11**1101 (= 61 = 0x3D)
Address being read	0b0110 1100 0001 0101 (= 0x6C15)
Actual physical ROM address	0b**1111** 0110 1100 0001 0101 (= 0xF6C15)

Detecting multicarts

MBC1 multicarts are not detectable by simply looking at the ROM header, because the ROM type value is just one of the normal MBC1 values. However, detection is possible by going through BANK2 values and looking at "bank 0" of each multicart game and doing some heuristics based

on the header data. All the included games, including the game selection menu, have proper header data. One example of a good heuristic is logo data verification.

So, if you have a 8 Mbit cart with MBC1, first assume that it's a multicart and bank numbers are 6-bit values. Set BANK1 to zero and loop through the four possible BANK2 values while checking the data at `0x0104–0x0133`. In other words, check logo data starting from physical ROM locations `0x00104`, `0x40104`, `0x80104`, and `0xC0104`. If proper logo data exists with most of the BANK2 values, the cart is most likely a multicart. Note that multicarts can just have two actual games, so one of the locations might not have the header data in place.

12.5 Dumping MBC1 carts

MBC1 cartridge dumping is fairly straightforward with the right hardware. The total number of banks is read from the header, and each bank is read one byte at a time. However, BANK1 register zero-adjustment and multicart cartridges need to be considered in ROM dumping code.

Banks `0x20`, `0x40` and `0x60` can only be read from the `0x0000–0x3FFF` memory area and only when MODE register value is `0b1`. Using MODE `0b1` has no undesirable effects when doing ROM dumping, so using it at all times is recommended for simplicity.

Multicarts should be detected using the logo check described earlier, and if a multicart is detected, BANK1 should be considered a 4-bit register in the dumping code.

```python
BANK1 = 0x2000
BANK2 = 0x4000
MODE = 0x6000
write_byte(MODE, 0x01)
for bank in range(0, num_banks):
    write_byte(BANK1, bank)
    if is_multicart:
        write_byte(BANK2, bank >> 4)
        bank_start = 0x4000 if bank & 0x0f else 0x0000
    else:
        write_byte(BANK2, bank >> 5)
        bank_start = 0x4000 if bank & 0x1f else 0x0000
    for addr in range(bank_start, bank_start + 0x4000):
        buf += read_byte(addr)
```
Listing 12.1: Python pseudo-code for MBC1 ROM dumping

Chapter 13
MBC2 mapper chip

MBC2 supports ROM sizes up to 2 Mbit (16 banks of `0x4000` bytes) and includes an internal 512x4 bit RAM array, which is its unique feature. The information in this section is based on my MBC2 research, Tauwasser's research notes [8], and Pan Docs [7].

> **🧩 Speculation**
>
> MBC1 is strictly more powerful than MBC2 because it supports more ROM and RAM. This raises a very important question: why does MBC2 exist? It's possible that Nintendo tried to integrate a small amount of RAM on the MBC chip for cost reasons, but it seems that this didn't work out very well since all later MBCs revert this design decision and use separate RAM chips.

13.1 MBC2 registers

> **ⓘ Caveat**
>
> These registers don't have any standard names and are usually referred to using one of their addresses or purposes instead. This document uses names to clarify which register is meant when referring to one.

The MBC2 chip includes two registers that affect the behaviour of the chip. The registers are mapped a bit differently compared to other MBCs. Both registers are accessible within `0x0000–0x3FFF`, and within that range, the register is chosen based on the A8 address signal. In practice, this means that the registers are mapped to memory in an alternating pattern. For example, `0x0000`, `0x2000` and `0x3000` are RAMG, and `0x0100`, `0x2100` and `0x3100` are ROMB. Both registers are smaller than 8 bits, and unused bits are simply ignored during writes. The registers are not directly readable.

Register 13.1: `0x0000–0x3FFF` when A8=0b0 - RAMG - MBC2 RAM gate register

U	U	U	U	W–0	W–0	W–0	W–0
				RAMG<3:0>			
bit 7	6	5	4	3	2	1	bit 0

bit 7-4   **Unimplemented**: Ignored during writes

bit 3-0   **RAMG<3:0>**: RAM gate register
       `0b1010` = enable access to chip RAM
       All other values disable access to chip RAM

The 4-bit MBC2 RAMG register works in a similar manner as MBC1 RAMG, so the upper bits don't matter and only the bit pattern `0b1010` enables access to RAM.

When RAM access is disabled, all writes to the external RAM area `0xA000–0xBFFF` are ignored, and reads return undefined values. Pan Docs recommends disabling RAM when it's not being accessed to protect the contents [7].

> 🧩 **Speculation**
>
> We don't know the physical implementation of RAMG, but it's certainly possible that the `0b1010` bit pattern check is done at write time and the register actually consists of just a single bit.

Register 13.2: `0x0000–0x3FFF` when A8=`0b1` - ROMB - MBC2 ROM bank register

U	U	U	U	W–0	W–0	W–0	W–1
				ROMB<3:0>			
bit 7	6	5	4	3	2	1	bit 0

bit 3-0 ROMB<3:0>: ROM bank register
Never contains the value `0b0000`.
If `0b0000` is written, the resulting value will be `0b0001` instead.

The 4-bit ROMB register is used as the ROM bank number when the CPU accesses the `0x4000–0x7FFF` memory area.

Like MBC1 BANK1, the MBC2 ROMB register doesn't allow zero (bit pattern `0b0000`) in the register, so any attempt to write `0b0000` writes `0b0001` instead.

13.2 ROM in the `0x0000–0x7FFF` area

In MBC2 cartridges, the A0-A13 cartridge bus signals are connected directly to the corresponding ROM pins, and the remaining ROM pins (A14-A17) are controlled by the MBC2. These remaining pins form the ROM bank number.

When the `0x0000–0x3FFF` address range is accessed, the effective bank number is always 0.

When the `0x4000–0x7FFF` address range is accessed, the effective bank number is the current ROMB register value.

	ROM address bits	
Accessed address	Bank number	Address within bank
	17-14	13-0
0x0000–0x3FFF	0b0000	A<13:0>
0x4000–0x7FFF	ROMB	A<13:0>

Table 13.1: Mapping of physical ROM address bits in MBC2 carts

13.3 RAM in the `0xA000–0xBFFF` area

All MBC2 carts include SRAM, because it is located directly inside the MBC2 chip. These cartridges never use a separate RAM chip, but battery backup circuitry and a battery are optional. If RAM is not enabled with the RAMG register, all reads return undefined values and writes have no effect.

MBC2 RAM is only 4-bit RAM, so the upper 4 bits of data do not physically exist in the chip. When writing to it, the upper 4 bits are ignored. When reading from it, the upper 4 data signals are not driven by the chip, so their content is undefined and should not be relied on.

MBC2 RAM consists of 512 addresses, so only A0-A8 matter when accessing the RAM region. There is no banking, and the `0xA000–0xBFFF` area is larger than the RAM, so the addresses wrap around. For example, accessing `0xA000` is the same as accessing `0xA200`, so it is possible to write to the former address and later read the written data using the latter address.

Accessed address	RAM address bits
	8-0
0xA000–0xBFFF	A<8:0>

Table 13.2: Mapping of physical RAM address bits in MBC2 carts

13.4 Dumping MBC2 carts

MBC2 cartridges are very simple to dump. The total number of banks is read from the header, and each bank is read one byte at a time. ROMB zero adjustment must be considered in the ROM dumping code, but this only means that bank 0 should be read from `0x0000–0x3FFF` and not from `0x4000–0x7FFF` like other banks.

```python
ROMB = 0x2100
for bank in range(0, num_banks):
    write_byte(ROMB, bank)
    bank_start = 0x4000 if bank > 0 else 0x0000
    for addr in range(bank_start, bank_start + 0x4000):
        buf += read_byte(addr)
```

Listing 13.2: Python pseudo-code for MBC2 ROM dumping

Chapter 14
MBC3 mapper chip

MBC3 supports ROM sizes up to 16 Mbit (128 banks of `0x4000` bytes), and RAM sizes up to 256 Kbit (4 banks of `0x2000` bytes). It also includes a real-time clock (RTC) that can be clocked with a quartz crystal on the cartridge even when the Game Boy is powered down. The information in this section is based on my MBC3 research, and Pan Docs [7].

Chapter 15
MBC30 mapper chip

MBC30 is a variant of MBC3 used by Japanese Pokemon Crystal to support a larger ROM chip and a larger RAM chip. Featurewise MBC30 is almost identical to MBC3, but supports ROM sizes up to 32 Mbit (256 banks of `0x4000` bytes), and RAM sizes up to 512 Kbit (8 banks of `0x2000` bytes). Information in this section is based on my MBC30 research.

> ⚠ **Warning**
>
> The circuit board of Japanese Pokemon Crystal includes a 1 Mbit RAM chip, but MBC30 is limited to 512 Kbit RAM. One of the RAM address pins is unused, so half of the RAM is wasted and is inaccessible without modifications. So, the game only uses 512 Kbit and there is a mismatch between accessible and the physical amounts of RAM.

Chapter 16
MBC5 mapper chip

The majority of games for Game Boy Color use the MBC5 chip. MBC5 supports ROM sizes up to 64 Mbit (512 banks of `0x4000` bytes), and RAM sizes up to 1 Mbit (16 banks of `0x2000` bytes). The information in this section is based on my MBC5 research, and The Cycle-Accurate Game Boy Docs [9].

16.1 MBC5 registers

Register 16.1: `0x0000–0x1FFF` - RAMG - MBC5 RAM gate register

W–0	W–0	W–0	W–0	W–0	W–0	W–0	W–0
RAMG<7:0>							
bit 7	6	5	4	3	2	1	bit 0

bit 7-0 RAMG<7:0>: RAM gate register
    `0b00001010` = enable access to cartridge RAM
    All other values disable access to cartridge RAM

The 8-bit MBC5 RAMG register works in a similar manner as MBC1 RAMG, but it is a full 8-bit register so upper bits matter when writing to it. Only `0b00001010` enables RAM access, and all other values (including `0b10001010` for example) disable access to RAM.

When RAM access is disabled, all writes to the external RAM area `0xA000–0xBFFF` are ignored, and reads return undefined values. Pan Docs recommends disabling RAM when it's not being accessed to protect the contents [7].

> 🧩 **Speculation**
>
> We don't know the physical implementation of RAMG, but it's certainly possible that the `0b00001010` bit pattern check is done at write time and the register actually consists of just a single bit.

Register 16.2: `0x2000–0x2FFF` - ROMB0 - MBC5 lower ROM bank register

W–0	W–0	W–0	W–0	W–0	W–0	W–0	W–1
ROMB0<7:0>							
bit 7	6	5	4	3	2	1	bit 0

bit 7-0 ROMB0<7:0>: Lower ROM bank register

The 8-bit ROMB0 register is used as the lower 8 bits of the ROM bank number when the CPU accesses the `0x4000–0x7FFF` memory area.

Register 16.3: `0x3000-0x3FFF` - ROMB1 - MBC5 upper ROM bank register

U	U	U	U	U	U	U	W-0
							ROMB1
bit 7	6	5	4	3	2	1	bit 0

bit 7-1   Unimplemented: Ignored during writes

bit 0   ROMB1: Upper ROM bank register

The 1-bit ROMB1 register is used as the most significant bit (bit 9) of the ROM bank number when the CPU accesses the `0x4000-0x7FFF` memory area.

Register 16.4: `0x4000-0x5FFF` - RAMB - MBC5 RAM bank register

U	U	U	U	W-0	W-0	W-0	W-0
				RAMB<3:0>			
bit 7	6	5	4	3	2	1	bit 0

bit 7-4   Unimplemented: Ignored during writes

bit 3-0   RAMB<3:0>: RAM bank register

The 4-bit RAMB register is used as the RAM bank number when the CPU accesses the `0xA000-0xBFFF` memory area.

Chapter 17
MBC6 mapper chip

MBC6 supports ROM sizes up to 16 Mbit (256 banks of `0x2000` bytes), and RAM sizes up to 4 Mbit (128 banks of `0x1000` bytes). The information in this section is based on my MBC6 research.

Chapter 18

MBC7

TODO.

Chapter 19
HuC-1 mapper chip

HuC-1 supports ROM sizes up to 8 Mbit (64 banks of `0x4000` bytes), and RAM sizes up to 256 Kbit (4 banks of `0x2000` bytes). It also includes a sensor and a LED for infrared communication. The information in this section is based on my HuC-1 research.

Chapter 20
HuC-3 mapper chip

HuC-3 supports ROM sizes up to 16 Mbit (128 banks of `0x4000` bytes), and RAM sizes up to 1 Mbit (16 banks of `0x2000` bytes). Like HuC-1, it includes support for infrared communication, but also includes a real-time-clock (RTC) and output pins used to control a piezoelectric buzzer. The information in this section is based on my HuC-3 research.

Chapter 21
MMM01

TODO.

Chapter 22
TAMA5

TODO.

Appendices

Appendix A
Instruction set tables

These tables include all the opcodes in the Sharp SM83 instruction set. The style and layout of these tables was inspired by the opcode tables available at pastraiser.com [10].

	x0	x1	x2	x3	x4	x5	x6	x7	x8	x9	xa	xb	xc	xd	xe	xf
0x	NOP	LD BC,nn	LD (BC),A	INC BC	INC B	DEC B	LD B,n	RLCA	LD (nn),SP	ADD HL,BC	LD A,(BC)	DEC BC	INC C	DEC C	LD C,n	RRCA
1x	STOP	LD DE,nn	LD (DE),A	INC DE	INC D	DEC D	LD D,n	RLA	JR e	ADD HL,DE	LD A,(DE)	DEC DE	INC E	DEC E	LD E,n	RRA
2x	JR NZ,e	LD HL,nn	LD (HL+),A	INC HL	INC H	DEC H	LD H,n	DAA	JR Z,e	ADD HL,HL	LD A,(HL+)	DEC HL	INC L	DEC L	LD L,n	CPL
3x	JR NC,e	LD SP,nn	LD (HL-),A	INC SP	INC (HL)	DEC (HL)	LD (HL),n	SCF	JR C,e	ADD HL,SP	LD A,(HL-)	DEC SP	INC A	DEC A	LD A,n	CCF
4x	LD B,B	LD B,C	LD B,D	LD B,E	LD B,H	LD B,L	LD B,(HL)	LD B,A	LD C,B	LD C,C	LD C,D	LD C,E	LD C,H	LD C,L	LD C,(HL)	LD C,A
5x	LD D,B	LD D,C	LD D,D	LD D,E	LD D,H	LD D,L	LD D,(HL)	LD D,A	LD E,B	LD E,C	LD E,D	LD E,E	LD E,H	LD E,L	LD E,(HL)	LD E,A
6x	LD H,B	LD H,C	LD H,D	LD H,E	LD H,H	LD H,L	LD H,(HL)	LD H,A	LD L,B	LD L,C	LD L,D	LD L,E	LD L,H	LD L,L	LD L,(HL)	LD L,A
7x	LD (HL),B	LD (HL),C	LD (HL),D	LD (HL),E	LD (HL),H	LD (HL),L	HALT	LD (HL),A	LD A,B	LD A,C	LD A,D	LD A,E	LD A,H	LD A,L	LD A,(HL)	LD A,A
8x	ADD B	ADD C	ADD D	ADD E	ADD H	ADD L	ADD (HL)	ADD A	ADC B	ADC C	ADC D	ADC E	ADC H	ADC L	ADC (HL)	ADC A
9x	SUB B	SUB C	SUB D	SUB E	SUB H	SUB L	SUB (HL)	SUB A	SBC B	SBC C	SBC D	SBC E	SBC H	SBC L	SBC (HL)	SBC A
ax	AND B	AND C	AND D	AND E	AND H	AND L	AND (HL)	AND A	XOR B	XOR C	XOR D	XOR E	XOR H	XOR L	XOR (HL)	XOR A
bx	OR B	OR C	OR D	OR E	OR H	OR L	OR (HL)	OR A	CP B	CP C	CP D	CP E	CP H	CP L	CP (HL)	CP A
cx	RET NZ	POP BC	JP NZ,nn	JP nn	CALL NZ,nn	PUSH BC	ADD n	RST 0x00	RET Z	RET	JP Z,nn	CB op	CALL Z,nn	CALL nn	ADC n	RST 0x08
dx	RET NC	POP DE	JP NC,nn	–	CALL NC,nn	PUSH DE	SUB n	RST 0x10	RET C	RETI	JP C,nn	–	CALL C,nn	–	SBC n	RST 0x18
ex	LDH (n),A	POP HL	LDH (C),A	–	–	PUSH HL	AND n	RST 0x20	ADD SP,e	JP HL	LD (nn),A	–	–	–	XOR n	RST 0x28
fx	LDH A,(n)	POP AF	LDH A,(C)	DI	–	PUSH AF	OR n	RST 0x30	LD HL,SP+e	LD SP,HL	LD A,(nn)	EI	–	–	CP n	RST 0x38

Table A.1: Sharp SM83 instruction set

Legend:

| 8-bit loads | 16-bit loads | 8-bit arithmetic/logical | 16-bit arithmetic | Rotates, shifts, and bit operations | Control flow | Miscellaneous |

| Undefined |

n   unsigned 8-bit immediate data

nn   unsigned 16-bit immediate data

e   signed 8-bit immediate data

	x0	x1	x2	x3	x4	x5	x6	x7	x8	x9	xa	xb	xc	xd	xe	xf
0x	RLC B	RLC C	RLC D	RLC E	RLC H	RLC L	RLC (HL)	RLC A	RRC B	RRC C	RRC D	RRC E	RRC H	RRC L	RRC (HL)	RRC A
1x	RL B	RL C	RL D	RL E	RL H	RL L	RL (HL)	RL A	RR B	RR C	RR D	RR E	RR H	RR L	RR (HL)	RR A
2x	SLA B	SLA C	SLA D	SLA E	SLA H	SLA L	SLA (HL)	SLA A	SRA B	SRA C	SRA D	SRA E	SRA H	SRA L	SRA (HL)	SRA A
3x	SWAP B	SWAP C	SWAP D	SWAP E	SWAP H	SWAP L	SWAP (HL)	SWAP A	SRL B	SRL C	SRL D	SRL E	SRL H	SRL L	SRL (HL)	SRL A
4x	BIT 0,B	BIT 0,C	BIT 0,D	BIT 0,E	BIT 0,H	BIT 0,L	BIT 0,(HL)	BIT 0,A	BIT 1,B	BIT 1,C	BIT 1,D	BIT 1,E	BIT 1,H	BIT 1,L	BIT 1,(HL)	BIT 1,A
5x	BIT 2,B	BIT 2,C	BIT 2,D	BIT 2,E	BIT 2,H	BIT 2,L	BIT 2,(HL)	BIT 2,A	BIT 3,B	BIT 3,C	BIT 3,D	BIT 3,E	BIT 3,H	BIT 3,L	BIT 3,(HL)	BIT 3,A
6x	BIT 4,B	BIT 4,C	BIT 4,D	BIT 4,E	BIT 4,H	BIT 4,L	BIT 4,(HL)	BIT 4,A	BIT 5,B	BIT 5,C	BIT 5,D	BIT 5,E	BIT 5,H	BIT 5,L	BIT 5,(HL)	BIT 5,A
7x	BIT 6,B	BIT 6,C	BIT 6,D	BIT 6,E	BIT 6,H	BIT 6,L	BIT 6,(HL)	BIT 6,A	BIT 7,B	BIT 7,C	BIT 7,D	BIT 7,E	BIT 7,H	BIT 7,L	BIT 7,(HL)	BIT 7,A
8x	RES 0,B	RES 0,C	RES 0,D	RES 0,E	RES 0,H	RES 0,L	RES 0,(HL)	RES 0,A	RES 1,B	RES 1,C	RES 1,D	RES 1,E	RES 1,H	RES 1,L	RES 1,(HL)	RES 1,A
9x	RES 2,B	RES 2,C	RES 2,D	RES 2,E	RES 2,H	RES 2,L	RES 2,(HL)	RES 2,A	RES 3,B	RES 3,C	RES 3,D	RES 3,E	RES 3,H	RES 3,L	RES 3,(HL)	RES 3,A
ax	RES 4,B	RES 4,C	RES 4,D	RES 4,E	RES 4,H	RES 4,L	RES 4,(HL)	RES 4,A	RES 5,B	RES 5,C	RES 5,D	RES 5,E	RES 5,H	RES 5,L	RES 5,(HL)	RES 5,A
bx	RES 6,B	RES 6,C	RES 6,D	RES 6,E	RES 6,H	RES 6,L	RES 6,(HL)	RES 6,A	RES 7,B	RES 7,C	RES 7,D	RES 7,E	RES 7,H	RES 7,L	RES 7,(HL)	RES 7,A
cx	SET 0,B	SET 0,C	SET 0,D	SET 0,E	SET 0,H	SET 0,L	SET 0,(HL)	SET 0,A	SET 1,B	SET 1,C	SET 1,D	SET 1,E	SET 1,H	SET 1,L	SET 1,(HL)	SET 1,A
dx	SET 2,B	SET 2,C	SET 2,D	SET 2,E	SET 2,H	SET 2,L	SET 2,(HL)	SET 2,A	SET 3,B	SET 3,C	SET 3,D	SET 3,E	SET 3,H	SET 3,L	SET 3,(HL)	SET 3,A
ex	SET 4,B	SET 4,C	SET 4,D	SET 4,E	SET 4,H	SET 4,L	SET 4,(HL)	SET 4,A	SET 5,B	SET 5,C	SET 5,D	SET 5,E	SET 5,H	SET 5,L	SET 5,(HL)	SET 5,A
fx	SET 6,B	SET 6,C	SET 6,D	SET 6,E	SET 6,H	SET 6,L	SET 6,(HL)	SET 6,A	SET 7,B	SET 7,C	SET 7,D	SET 7,E	SET 7,H	SET 7,L	SET 7,(HL)	SET 7,A

Table A.2: Sharp SM83 CB-prefixed instructions

Appendix B
Memory map tables

	bit 7	6	5	4	3	2	1	bit 0
0xFF00 P1			P15 buttons	P14 d-pad	P13 ⊕ start	P12 ⊕ select	P11 ⊕ B	P10 ⊕ A
0xFF01 SB				SB<7:0>				
0xFF02 SC	SIO_EN						SIO_FAST	SIO_CLK
0xFF03								
0xFF04 DIV				DIVH<7:0>				
0xFF05 TIMA				TIMA<7:0>				
0xFF06 TMA				TMA<7:0>				
0xFF07 TAC						TAC_EN	TAC_CLK<1:0>	
0xFF08								
0xFF09								
0xFF0A								
0xFF0B								
0xFF0C								
0xFF0D								
0xFF0E								
0xFF0F IF				IF_JOYPAD	IF_SERIAL	IF_TIMER	IF_STAT	IF_VBLANK
0xFF10 NR10								
0xFF11 NR11								
0xFF12 NR12								
0xFF13 NR13								
0xFF14 NR14								
0xFF15								
0xFF16 NR21								
0xFF17 NR22								
0xFF18 NR23								
0xFF19 NR24								
0xFF1A NR30								
0xFF1B NR31								
0xFF1C NR32								
0xFF1D NR33								
0xFF1E NR34								
0xFF1F								
	bit 7	6	5	4	3	2	1	bit 0

Table B.3: `0xFFxx` registers: `0xFF00–0xFF1F`

	bit 7	6	5	4	3	2	1	bit 0
0xFF20 NR41								
0xFF21 NR42								
0xFF22 NR43								
0xFF23 NR44								
0xFF24 NR50								
0xFF25 NR51								
0xFF26 NR52								
0xFF27								
0xFF28								
0xFF29								
0xFF2A								
0xFF2B								
0xFF2C								
0xFF2D								
0xFF2E								
0xFF2F								
0xFF30 WAV00								
0xFF31 WAV01								
0xFF32 WAV02								
0xFF33 WAV03								
0xFF34 WAV04								
0xFF35 WAV05								
0xFF36 WAV06								
0xFF37 WAV07								
0xFF38 WAV08								
0xFF39 WAV09								
0xFF3A WAV10								
0xFF3B WAV11								
0xFF3C WAV12								
0xFF3D WAV13								
0xFF3E WAV14								
0xFF3F WAV15								
	bit 7	6	5	4	3	2	1	bit 0

Table B.4: 0xFFxx registers: 0xFF20–0xFF3F

	bit 7	6	5	4	3	2	1	bit 0
0xFF40 LCDC	LCD_EN	WIN_MAP	WIN_EN	TILE_SEL	BG_MAP	OBJ_SIZE	OBJ_EN	BG_EN
0xFF41 STAT		INTR_LYC	INTR_M2	INTR_M1	INTR_M0	LYC_STAT	LCD_MODE<1:0>	
0xFF42 SCY								
0xFF43 SCX								
0xFF44 LY								
0xFF45 LYC								
0xFF46 DMA	DMA<7:0>							
0xFF47 BGP								
0xFF48 OBP0								
0xFF49 OBP1								
0xFF4A WY								
0xFF4B WX								
0xFF4C ????								
0xFF4D KEY1	KEY1_FAST							KEY1_EN
0xFF4E								
0xFF4F VBK							VBK<1:0>	
0xFF50 BOOT								BOOT_OFF
0xFF51 HDMA1								
0xFF52 HDMA2								
0xFF53 HDMA3								
0xFF54 HDMA4								
0xFF55 HDMA5								
0xFF56 RP								
0xFF57								
0xFF58								
0xFF59								
0xFF5A								
0xFF5B								
0xFF5C								
0xFF5D								
0xFF5E								
0xFF5F								
	bit 7	6	5	4	3	2	1	bit 0

Table B.5: `0xFFxx` registers: `0xFF40–0xFF5F`

	bit 7	6	5	4	3	2	1	bit 0
0xFF60 ????								
0xFF61								
0xFF62								
0xFF63								
0xFF64								
0xFF65								
0xFF66								
0xFF67								
0xFF68 BCPS								
0xFF69 BPCD								
0xFF6A OCPS								
0xFF6B OCPD								
0xFF6C ????								
0xFF6D								
0xFF6E								
0xFF6F								
0xFF70 SVBK							SVBK<1:0>	
0xFF71								
0xFF72 ????								
0xFF73 ????								
0xFF74 ????								
0xFF75 ????								
0xFF76 PCM12	PCM12_CH2				PCM12_CH1			
0xFF77 PCM34	PCM34_CH4				PCM34_CH3			
0xFF78								
0xFF79								
0xFF7A								
0xFF7B								
0xFF7C								
0xFF7D								
0xFF7E								
0xFF7F								
0xFFFF IE	IE_UNUSED<2:0>			IE_JOYPAD	IE_SERIAL	IE_TIMER	IE_STAT	IE_VBLANK
	bit 7	6	5	4	3	2	1	bit 0

Table B.6: `0xFFxx` registers: `0xFF60–0xFF7F`, `0xFFFF`

Appendix C
Game Boy external bus

C.1 Bus timings
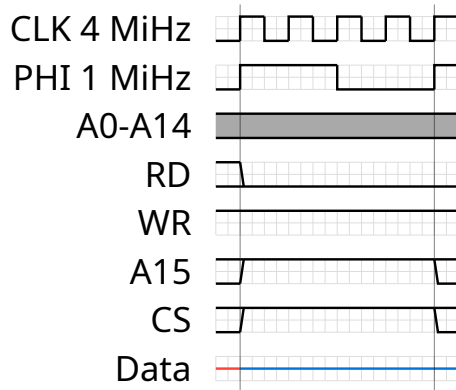
Figure C.5: External bus idle machine cycle
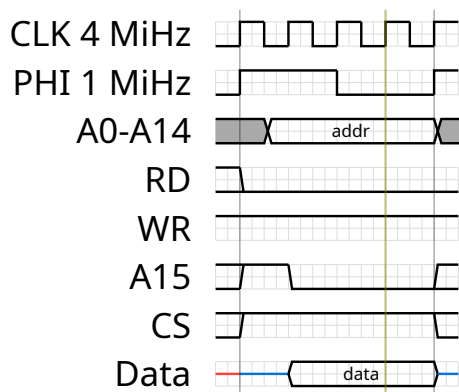
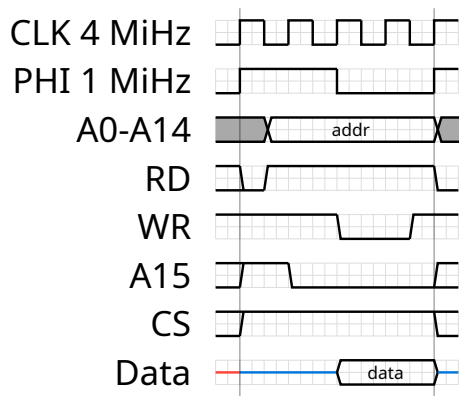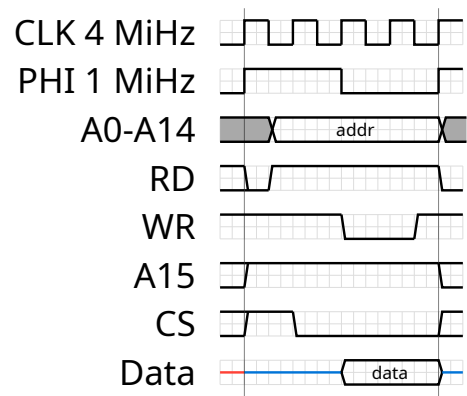a) `0x0000–0x7FFF`[1]
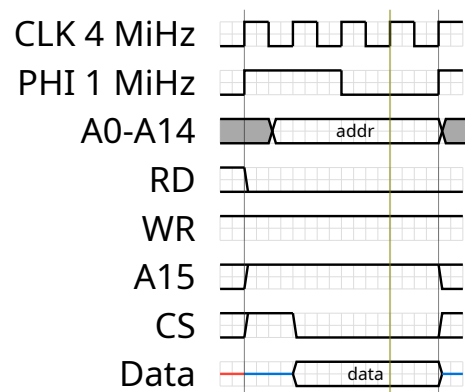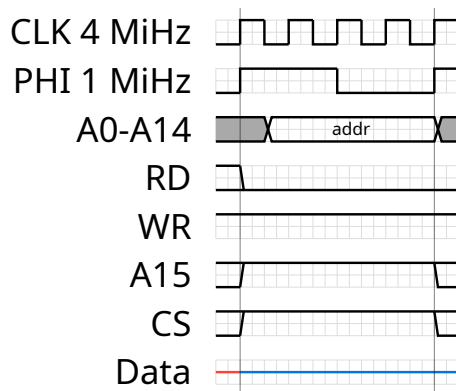
b) `0xA000–0xFDFF`

c) `0xFE00–0xFFFF`
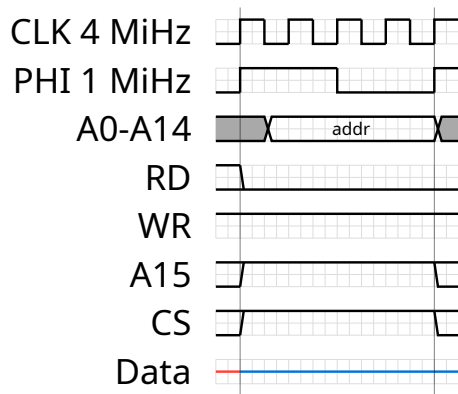
Figure C.6: External bus CPU read machine cycles

---

[1]Does not apply to `0x0000–0x00FF` accesses while the boot ROM is enabled. Boot ROM accesses do not affect the external bus, so it is in the idle state.
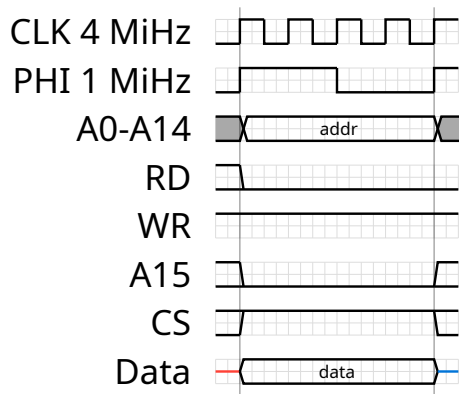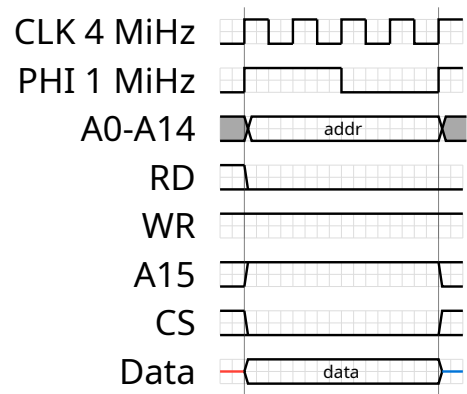
a) `0x0000–0x7FFF`[1]

b) `0xA000–0xFDFF`

c) `0xFE00–0xFFFF`

Figure C.7: External bus CPU write machine cycles

a) `0x0000–0x7FFF`[1]

b) `0xA000–0xFFFF`

Figure C.8: External bus timings for OAM DMA read machine cycles

Appendix D
Chip pinouts

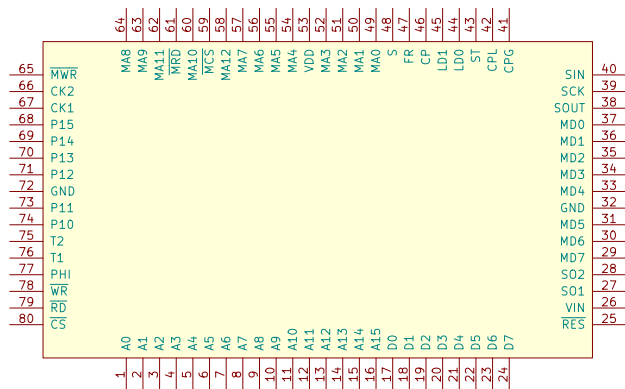## D.1 CPU chips
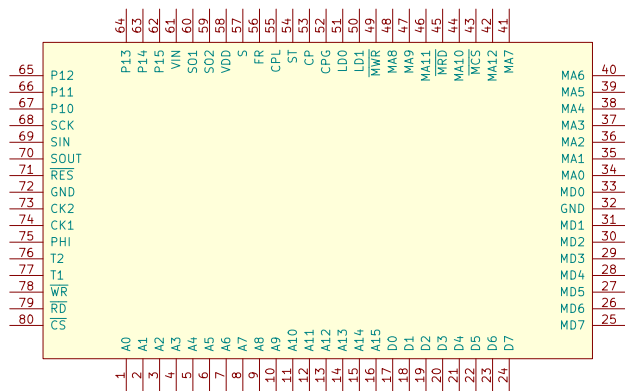
Figure D.9: DMG/SGB CPU (Sharp QFP080-P-1420)

Figure D.10: MGB/SGB2 CPU (Sharp QFP080-P-1420)

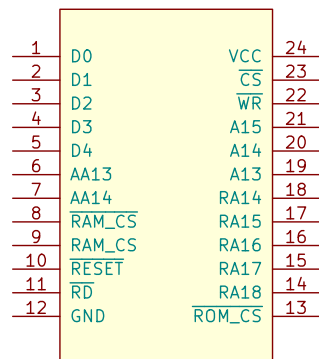## D.2 Cartridge chips

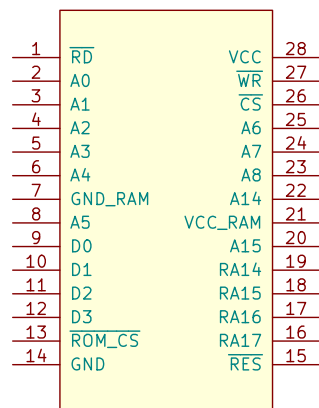Figure D.11: MBC1 (Sharp SOP24-P-450) [6]

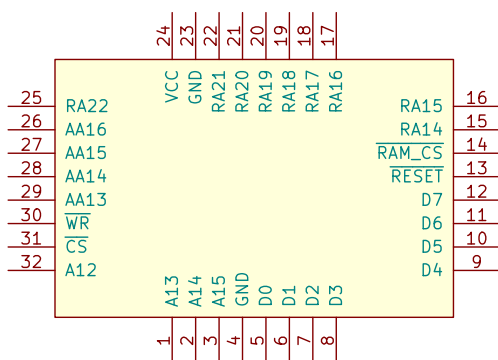Figure D.12: MBC2 (Sharp SOP28-P-450) [8]

Figure D.13: MBC5 (Sharp QFP32-P-0707)

Bibliography

[1]   "Microcomputers Data Book (1990)." Sharp Corporation. [Online]. Available: https://archive.org/details/bitsavers_sharpdataBomputersDataBook_31076011

[2]   "Microcomputer Data Book (1996)." Sharp Corporation. [Online]. Available: https://archive.org/details/bitsavers_sharpdataBomputerDataBook_13840187

[3]   "SM8311/SM8313/SM8314/SM8315 - 8-Bit Single-Chip Microcomputers (Controllers For Home Appliances)." Sharp Corporation.

[4]   Costis Sideris, "The quest for dumping GameBoy Boot ROMs!." [Online]. Available: http://www.its.caltech.edu/~costis/sgb_hack/

[5]   gekkio, "Dumping the Super Game Boy 2 boot ROM." [Online]. Available: https://gekkio.fi/blog/2015/dumping-the-super-game-boy-2-boot-rom/

[6]   Tauwasser, "MBC1 - Tauwasser's Wiki." [Online]. Available: https://wiki.tauwasser.eu/view/MBC1

[7]   Pan of ATX, M. Fayzullin, P. Felber, P. Robson, and M. Korth, "Pan Docs - Everything You Always Wanted To Know About GAMEBOY." [Online]. Available: http://bgb.bircd.org/pandocs.htm

[8]   Tauwasser, "MBC2 - Tauwasser's Wiki." [Online]. Available: https://wiki.tauwasser.eu/view/MBC2

[9]   Antonio Niño Díaz (AntonioND), "The Cycle-Accurate Game Boy Docs." [Online]. Available: https://github.com/AntonioND/giibiiadvance/tree/master/docs

[10] "Gameboy CPU (LR35902) instruction set." [Online]. Available: http://www.pastraiser.com/cpu/gameboy/gameboy_opcodes.html