
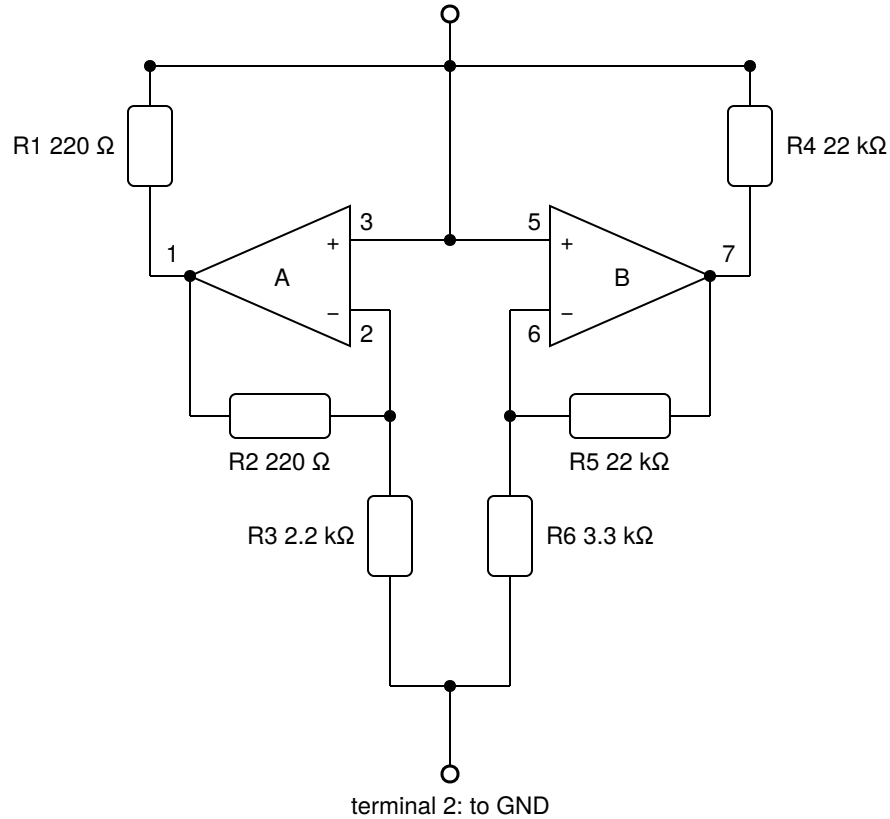


Chua diode N_R (dual op-amp, pins shown)

terminal 1: v

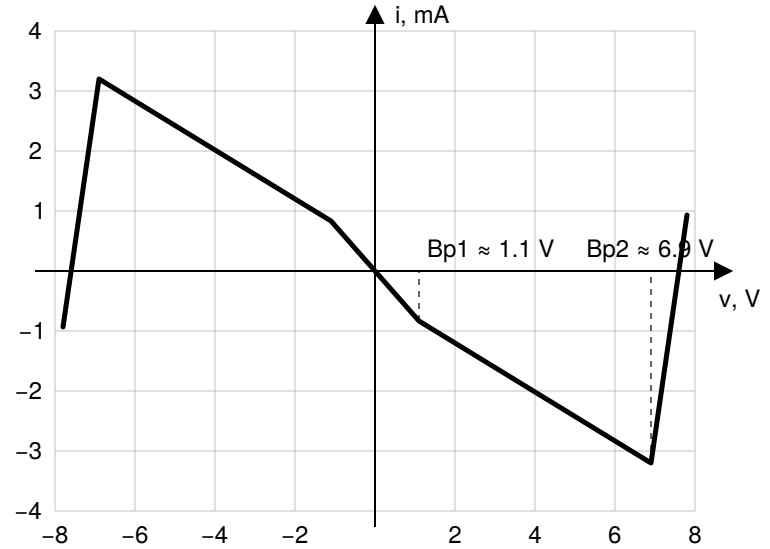

Expected V-I characteristic $i(v)$


$$R_a = -(R3 \parallel R6) \approx -1.32 \text{ k}\Omega \text{ (inner segment, } |v| < Bp1)$$
$$R_b = -R_3 \cdot R_4 / (R_4 - R_3) \approx -2.44 \text{ k}\Omega \text{ (middle segments)}$$

outer segments (op-amp saturation): $\approx +R1 \parallel R4 \approx +220 \Omega$

Supply decoupling (TL082, shared pins 8 / 4)

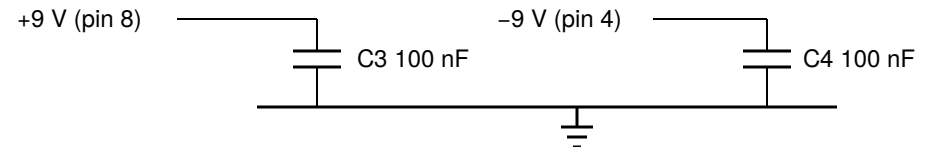


Fig. 1. Chua diode as a two-terminal element: circuit, expected piecewise-linear V-I curve, and supply decoupling.