





Performance curve

ISO9906 Annex A 3500rpm

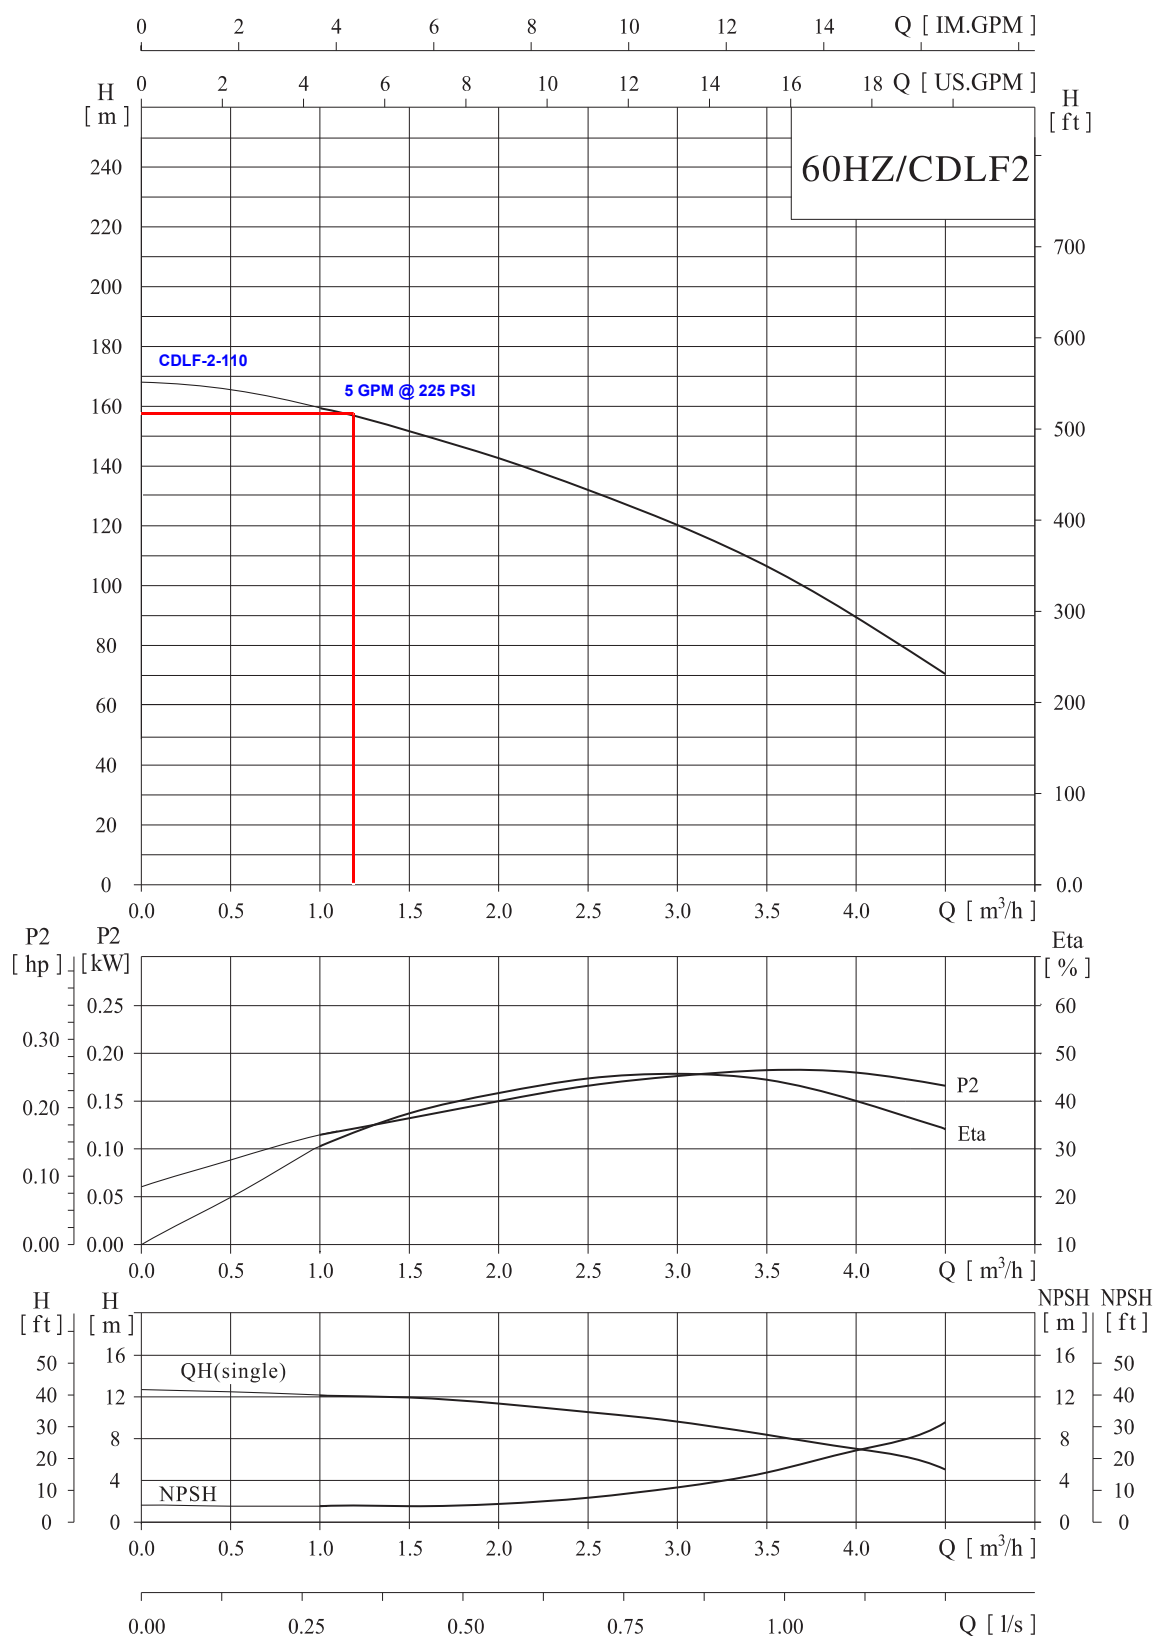

Installation sketch

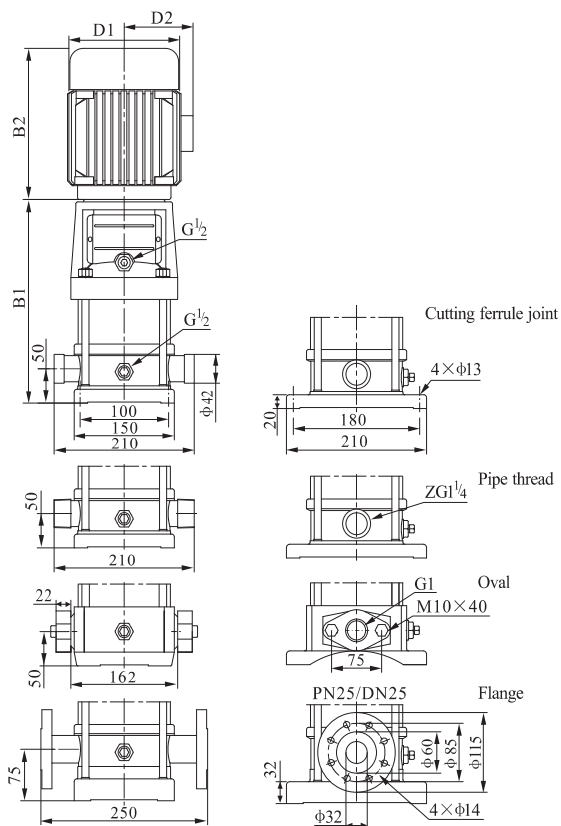

Size and weight

Model	Size (mm)					Weight (kg)
	B1	B2	B1+B2	D1	D2	
CDLF2-20	258	210	468	148	117	21
CDLF2-30	286	245	531	170	142	24
CDLF2-40	304	245	549	170	142	25
CDLF2-50	322	245	567	170	142	26
CDLF2-60	340	245	585	170	142	26
CDLF2-70	368	290	658	190	155	32
CDLF2-90	404	290	694	190	155	36
CDLF2-110	440	290	730	190	155	37
CDLF2-130	486	315	801	197	165	44
CDLF2-150	522	315	837	197	165	45
CDLF2-180	576	335	911	230	188	54

The overall dimensions of the single-phase motor and explosion-proof motor are a little different. Pls contact us for details.