




### 103(DWG.J282)

**Pressure Reducing Device Angle Valve**  
175 Lb. Rated Adjustable restriction of residual pressure up to 175 lb. Locking pin device restricts full opening of valve by untrained personnel, pin may be removed by firefighters to allow full opening of valve.  
**FEMALE x MALE**

Standard equipment:  
Female NPT inlet x male hose thread outlet forged brass valve Red hand wheel

Optional Finishes:  
**PB-Polished Brass**  
**RC-Rough Chrome Plated**  
**PC-Polished Chrome Plated**

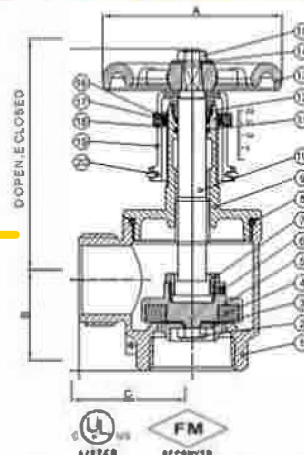

|                 | A   | B  | C  | D     | E   |
|-----------------|-----|----|----|-------|-----|
| 1 1/2" x 1 1/2" | 100 | 50 | 63 | 127.5 | 193 |
| 2" x 2 1/2"     | 125 | 68 | 79 | 162   | 205 |


| NO | DESCRIPTION | MATERIALS        | NO | DESCRIPTION  | MATERIALS        |
|----|-------------|------------------|----|--------------|------------------|
| 1  | BODY        | ASTM B283 C37700 | 11 | LOCK NUT     | ASTM B283 C37700 |
| 2  | WHEEL NUT   | ASTM B283 C37700 | 12 | ORING        | NBR              |
| 3  | WASHER      | SS304            | 13 | HANDLE WHEEL | DUCTILE IRON     |
| 4  | SEAT SEAL   | NBR              | 14 | WHEEL WASHER | SS304            |
| 5  | HOLDER      | ASTM B283 C37700 | 15 | WHEEL NUT    | ASTM B283 C37700 |
| 6  | SETSCREW    | SS304            | 16 | COLLAR       | ASTM B283 C37700 |
| 7  | LOCK NUT    | ASTM B283 C37700 | 17 | WASHER       | PA6              |
| 8  | ORING       | NBR              | 18 | SETSCREW     | ASTM B283 C37700 |
| 9  | BONNET      | ASTM B283 C37700 | 19 | SET NUMBERS  | ASTM B283 C37700 |
| 10 | STEM        | ASTM B283 C37700 | 20 | WIRE         | SS304            |

### 104(DWG.J282)

**Pressure Reducing Device Angle Valve 175 Lb.**  
Rated Adjustable restriction of residual pressure up to 175 lb. Locking pin device restricts full opening of valve by untrained personnel, pin may be removed by firefighters to allow full opening of valve.

**DOUBLE FEMALE**  
Standard equipment:  
Female NPT inlet and outlet forged brass valve  
Red hand wheel

Optional Finishes:  
**PB-Polished Brass**  
**RC-Rough Chrome Plated**  
**PC-Polished Chrome Plated**

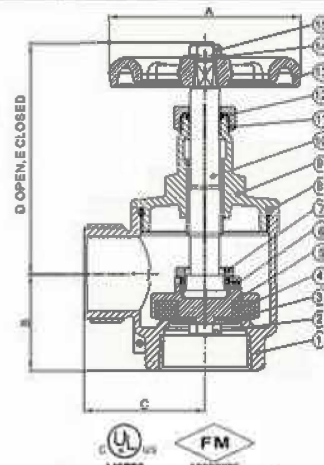

|                 | A   | B  | C  | D     | E   |
|-----------------|-----|----|----|-------|-----|
| 1 1/2" x 1 1/2" | 100 | 50 | 63 | 119.5 | 145 |
| 2" x 2 1/2"     | 125 | 68 | 79 | 157   | 200 |

| NO | DESCRIPTION | MATERIALS        | NO | DESCRIPTION  | MATERIALS        |
|----|-------------|------------------|----|--------------|------------------|
| 1  | BODY        | ASTM B283 C37700 | 11 | LOCK NUT     | ASTM B283 C37700 |
| 2  | WHEEL NUT   | ASTM B283 C37700 | 12 | ORING        | NBR              |
| 3  | WASHER      | SS304            | 13 | HANDLE WHEEL | DUCTILE IRON     |
| 4  | SEAT SEAL   | NBR              | 14 | WHEEL WASHER | SS304            |
| 5  | HOLDER      | ASTM B283 C37700 | 15 | WHEEL NUT    | ASTM B283 C37700 |
| 6  | SETSCREW    | SS304            | 16 | COLLAR       | ASTM B283 C37700 |
| 7  | LOCK NUT    | ASTM B283 C37700 | 17 | WASHER       | PA6              |
| 8  | ORING       | NBR              | 18 | SETSCREW     | ASTM B283 C37700 |
| 9  | BONNET      | ASTM B283 C37700 | 19 | SET NUMBERS  | ASTM B283 C37700 |
| 10 | STEM        | ASTM B283 C37700 | 20 | WIRE         | SS304            |