



K Circular Duct Fans

High Quality radial fan for circular ducts

- Available with AC and EC motors
- Indoor and outdoor installation
- Reliable and airtight
- Mounting bracket included
- Noise and energy optimized impeller

[Find more details in our online catalogue](#)

Flexibility

The K fans are intended to use for **supply** or **extract** air, designed to be installed in **any position**. This ensures that the fans can be used in a variety of **commercial** and **domestic** applications.

Reliability

The unit's **airtight casing** and corrosion resistance permits **outdoor** and **indoor** use. The combination of reliable casing and motor construction ensures, to minimize the need for maintenance of the fans and allows long **continuous operation**.

Performance

Sound optimized radial impeller together with **high efficient** external rotor motor are designed to ensure high-level performance to **minimize power consumption** and **maximize efficiency**.

Accessories

K fans can be selected together with variety types of **accessories** as fast clamps, heaters, filters, dampers, etc.

Certifications



AMCA Worldwide Certified Ratings: Sound and Air Performance

Systemair certifies that the model shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program. Check the AMCA Certified and Listed Product Search for our products
<https://www.amca.org/certify/#certified-product-search>



Ecodesign (ErP) compliant

Compliant with today's and tomorrow's European Union rules and requirements for energy labelling and ecodesign for Energy-related Products (ErP).



Eco Platform: EPD Verified

This product comes with an Environmental Product Declaration (EPD), published by EPD Norway, a global EPD program operator and member of the ECO Platform (<https://www.eco-platform.org/who-is-participating.html>). Compliant with ISO 14025 and EN 15804, Systemair EPDs support Life Cycle Assessments (LCAs) in all markets where the product is used. Scroll down to download the EPDs.

Features

Construction

Casing made of **galvanised sheet steel**, corrosion **class C3** is fully **air tight class C** according to EN1751. The fans are equipped with an external **terminal box** with protection class **IP55**.

Impeller

K fans use backward curved **radial** impellers. These are from lightweight, hard-wearing fiberglass reinforced **polyamide**, dynamically **balanced** and paired with corresponding external rotor motors.

Motor

Depending on type, K fans are equipped with **AC** or high efficient **EC** external rotor motors. All motors are suitable for **50Hz** and **60Hz**.

Motor protection

Fans with **AC** motors have **integrated** thermal protection with manual (electrical) reset. Size 100 and 125 has an impedance motor protection.

Fans with **EC** motors have an **integrated** electronic **thermal protection** including **locked-rotor protection** and **soft-start**.

Control

EC motor with **built-in potentiometer** to adjust working point can be also controlled by external **signal 0-10V**.

AC motor can be controlled by **5-step** or **stepless** speed regulator.

Installation

K fans can be installed in **any** position **indoor** and **outdoor** by included **mounting brackets**. All models have a spigot with 25 mm length which is perfectly designed to connect circular duct by **fast clamps preventing vibration** to the duct. Installation can be combined with filter boxes, sound attenuators, and other mechanical accessories from recommended list.

Technical parameters

Nominal data

Voltage (nominal)	230	V
Frequency	60	Hz
Phases	1~	
Input power	138	W
Input power kW	0.138	kW
Input current	0.606	A
Impeller speed	2,625	rpm
Air flow	max 871	m³/h
Capacitance of capacitor	2.5	µF
Temperature of transported air	max 70	°C
Max temperature of transported air, when speed controlled	70	°C
Missing DictionaryId: Motor power	M	

Sound data

Sound pressure level at 3m (20m² Sabin)	44	dB(A)
---	----	-------

Protection/Classification

Enclosure class, motor	IP44
Insulation class	F

Data according to ErP

ErP ready	ErP 2016; ErP 2018
-----------	--------------------

Dimensions and weights


Duct dimension; Circular, inlet	250	mm
Duct dimension; Circular, outlet	250	mm
Weight	3.9	kg

Others

Duct connection type	Circular
Motor type	AC

Performance

Performance curve

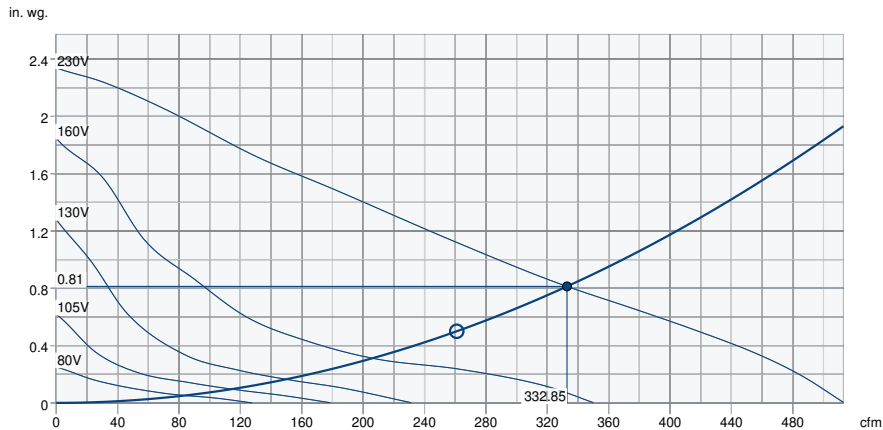

Hydraulic data

Required air flow	261.00 cfm
Required static pressure	0.50 in. wg.
Working air flow	332.85 cfm
Working static pressure	0.81 in. wg.
Air density	1.204 kg/m ³
Power	138.2 W
Fan control - RPM	2,628 rpm
Current	0.61 A
SFP	0.880 kW/m ³ /s
Control voltage	230.0 V
Supply voltage	230 V

Sound power level		63	125	250	500	1k	2k	4k	8k	Total
Inlet	dB(A)	44	63	63	62	62	59	55	52	69
Outlet	dB(A)	46	64	64	62	63	62	55	51	70
Surrounding	dB(A)	11	31	37	45	43	39	37	34	49
Sound pressure level at 3m (20m ² Sabine)	dB(A)	-	-	-	-	-	-	-	-	42
Sound pressure level at 3m free field	dB(A)	-	-	-	-	-	-	-	-	28


AMCA Certified Rating statements

- AMCA Worldwide Certified
Ratings: Sound and Air Performance
- Catalogue Version: 2025-02
- Performance certified is for installation type D – Ducted inlet, Ducted outlet.
- The sound power level ratings shown are in decibels, referred to 10⁻¹² watts, calculated per AMCA Standard 301.
- The A-weighted sound power ratings shown have been calculated per AMCA Standard 301.
- Sound pressure level at 3m (20m³ Sabin) dB(A) & Sounds pressure level at 3m free field dB(A) are not licensed by AMCA International.
- Surrounding dB(A) is not licensed by AMCA International.
- Ratings include the effects of duct end correction.
- Values shown are for inlet dB(A) sound power levels for Installation Type D: ducted inlet, ducted outlet.
- Only full speed is certified data.


Ecodesign

Product		
Trade name	Systemair	
Product name	K 250 M Sileo	
Ecodesign		
ErP compliance	2016	
Unit category	NRVU	
Drive	External MSD or VSD	
Unit type	UVU	
Heat recovery type	None	
Temperature ratio (UVU)	Not applicable	
qv nom	0.1089	m³/s
P nom	0.136	kW
Ps nom	313	Pa
Fan efficiency	25	%
External Leakage	0	%
Sound power (LWA)	43	dB(A)

Dimension

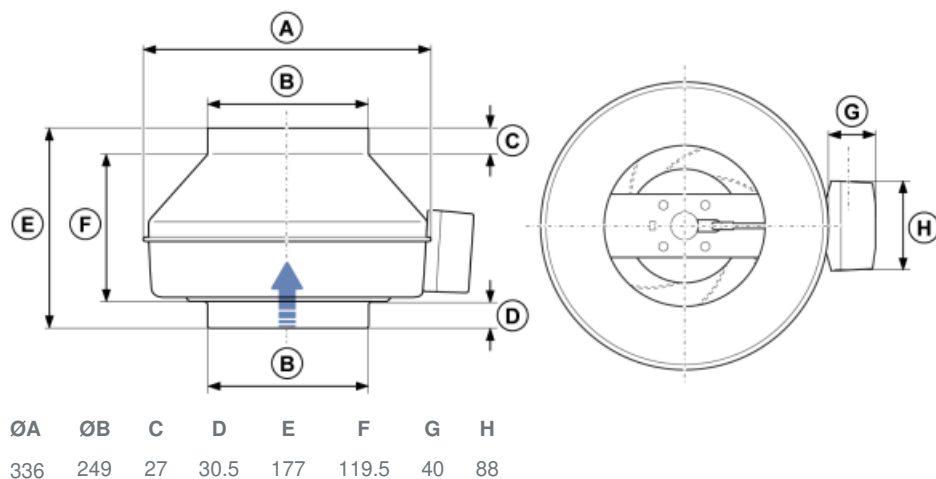

Wiring

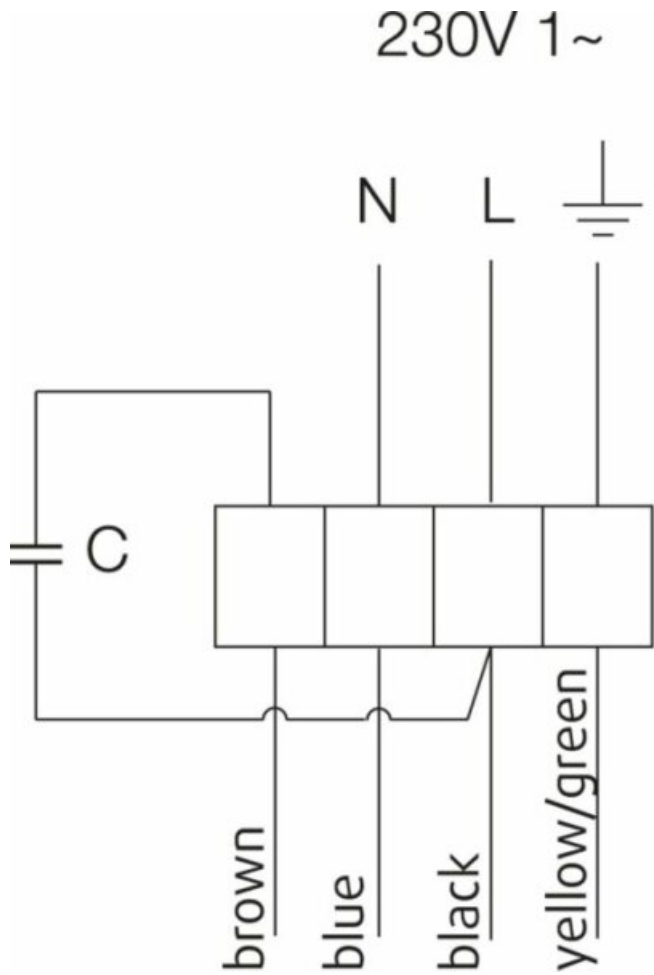

Accessories

- Frequency converter FRQ5SE-6A (37421)
- REE 1 Speed control (5314)
- RETP 6 Temp/Pressure regulator (32293)
- REV-3POL/03-7,5kW R/Y (33978)
- VKK-250 Back draft damper (1627)
- DTV500A (96807)
- HR1 Room Humidistat (215150)
- RT 0-30 Room Thermostat (5151)
- T 120 Timer (5165)
- CB 250-9,0 400V/3 Duct heater (5373)
- CBMF 250-3,0 230V/1 Duct heater (12248)
- CWK 250-3-2,5 Duct cooler, circ (30024)
- FGR 250 Filter cassette (1815)
- LDC 250-900 Silencer (5196)
- VBC 250-2 Water heating batt (5460)
- VBF 250 Water heating battery (1733)
- Room hygrostat HR-S (286251)
- RE 1,5 Speed control (5000)
- REPT 6 Digital regulator (5698)
- REU 1.5 Speed control (5004)
- SG 250 Protection guard (5610)
- CB 250-6,0 400V/2 Duct heater (5372)
- Frequency converter FRQSE-6A (37419)
- Presence detector/IR24-P (6995)
- Safety switch 2-pole grey (210679)
- CB 250-3,0 230V/1 Duct heater (5385)
- CBM 250-6,0 400V/2 Duct heater (9089)
- CBMF 250-6,0 400V/2 Duct heater (12249)
- FFR 250 Filter cassette (1776)
- FK 250 Fast clamp (1612)
- RSK-250 Back draft damper (5603)
- VBC 250-3 Water heating batt (9843)
- VK-25 Louvre shutter (5640)

Documents

- [INSTALLATION__OPERATION_AND_MAINTENANCE_INSTRUCTION_K__KV__PRIO__EN_20250306_145834193.PDF](#)
- [COMMISSIONING_RECORD_FANS__EN.PDF](#)
- [EPD_728857_Systemair_K_100_M_sileo__pdf](#)
- [EPD_728857_Systemair_K_100_M_sileo__json](#)
- [K fan mounting.wmv](#)