



GLOBE VALVE


SB-ATI-VD008

TYPE D 62

RATING	BODY 800#			ASSEMBLING BODY BONNET	SCREWED BONNET	<input checked="" type="checkbox"/>	INSIDE SCREW	<input checked="" type="checkbox"/>
	ASSEMBLING SOCKET WELDED				BOLTED BONNET	<input type="checkbox"/>	OUTSIDE SCREW	<input type="checkbox"/>
MATERIALS	BODY AISI 316				STEM AISI 316			
	SEATS AISI 316				DISC AISI 316			
OPERATING CONDITIONS	P	12 Bar	T	250° C	USE :	/		

NOTES:

- (1) All gaskets have to be asbestos free
- (2) All dimensions are in mm
- (3) Face to Face dimensions in according to "DIN 3202-M3"
- (4) On lines conveying dangerous or toxic media, a cutoff valve with perfect sealing has to be installed upstream this valve

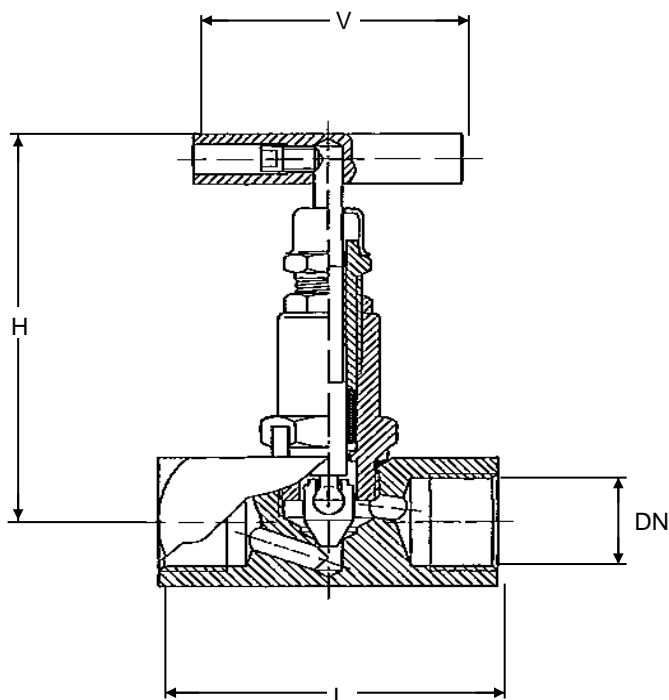

INCH.	1/8"	1/4"	3/8"	1/2"	3/4"	1"									
DN	6	8	10	15	20	25									
L (3)	50	50	60	75	80	90									
H	100	100	100	110	135	145									
V	70	70	70	70	95	100									
Weight Kg.	0,56	0,56	0,56	0,75	1,65	2,65									

1	REVISED	ATI	21/11/06	The master version of this document is stored as a digital file in a software archive - Approval process is digitally managed, details do not show on paper copies.
0	ISSUED	ATI	31/01/05	
Rev.	Description	Author	Date	

We reserve the ownership under the law of this document with prohibition of even partial reproduction and to make it known to third persons without our written authorization