



Ci riserviamo la proprietà' a termine di legge di questo disegno con divieto di riprodurlo anche in parte o di renderlo noto a terzi senza nostra autorizzazione scritta.




We reserve the ownership under the law of this drawing with prohibition of even partial reproduction and to make it known to third persons without our written authorization.

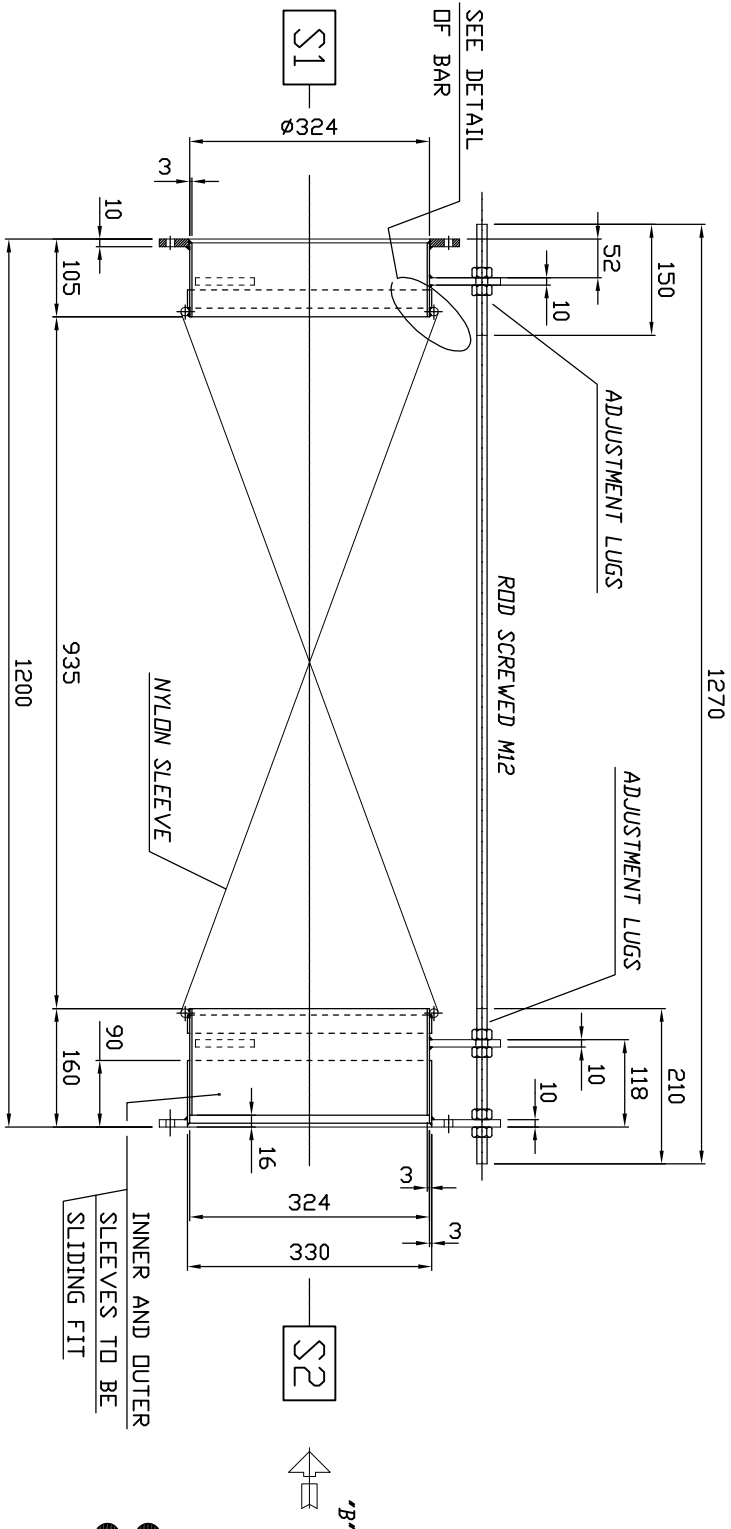

PROVIDE SELF ADHESIVE NAME-PLATE

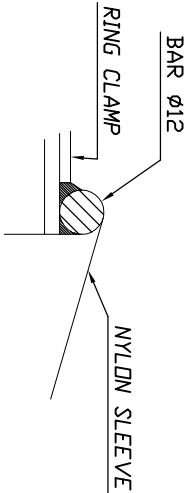

DETAIL OF BAR

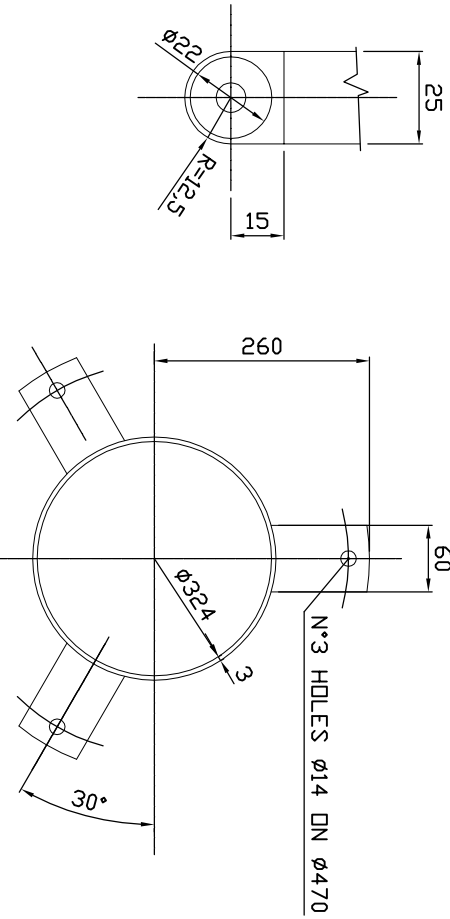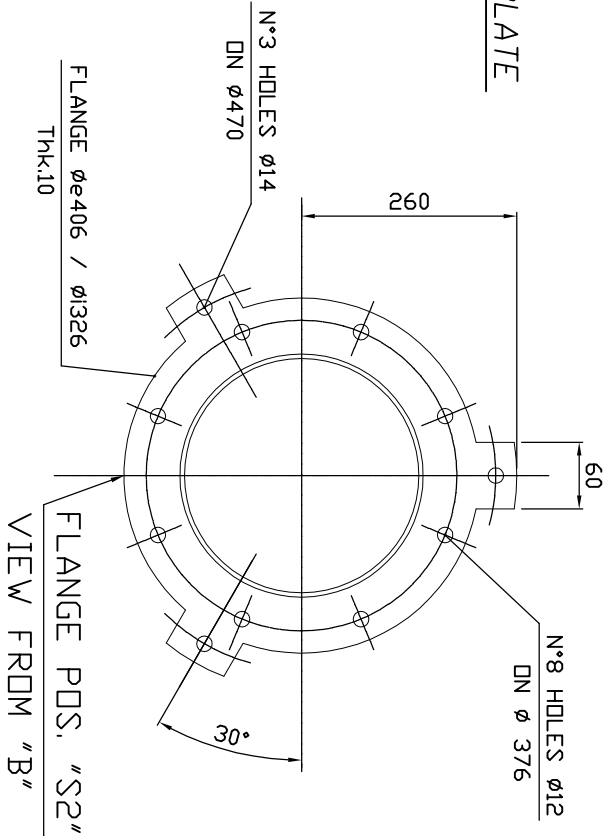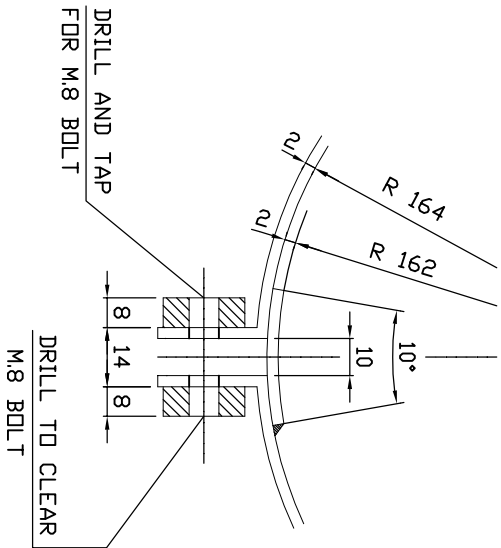

RING CLAMP DETAIL

DETAIL OF ADJUSTMENT LUGS

<div></div>		ITEM 64WG1		CUSTOMER		DWG. 2F11 . 35 . 135	
desmet ballestra		N°REQUIRED 1		PLANT SABIZ		DISCHARGE VALVE	
Rev. 0		Date 23.02.12		Drawn T.T.		ISSUED FOR INFORMATION	
1							
2							
3							
4							
5							
THE MASTER VERSION OF THIS DOCUMENT IS STORED AS A DIGITAL FILE IN A DATABASE - APPROVAL PROCESS IS DIGITALLY MANAGED, AND NO SIGNATURE IS VISIBLE ON THE DOCUMENT							
NOZZLES				DESIGN DATA			
POS.	SIZE	RATING	N°	SERVICE	THK.	NOZZLES ORIENT.	
S1	300	SB-ATI-PF001	1	PRODUCT INLET	3	-	OPERATING PRESSURE mbar (g) -12
S2	300	SB-ATI-PF001	1	PRODUCT OUTLET	3	-	DESIGN PRESSURE mbar (g) -35
							HYDROSTATIC TEST PRESSURE Bar (g) -
							PNEUMATIC TEST PRESSURE Bar (g) -
							OPERATING TEMPERATURE °C 40
							DESIGN TEMPERATURE °C 60
							FLUID/SPECIFIC WEIGHT 025 - 04 kg/dm3 DETERG. POWDER
							HEAT EXCHANGE SURFACE m2 -
							HEAT TREATMENT -
							X-RAY TEST -
							PENETRATING LIQUIDS TEST -
							JOINT EFFICIENCY -
							CORROSION ALLOWANCE mm -
							GEOMETRIC CAPACITY litri -
							INSPECTION INSTITUTE
							BALLESTRA S.p.A.
							CODE
							STD. BALLESTRA
							WEIGHTS
							EMPTY 40~ kg
							OPERATING ~ kg
							WATER FILLED ~ kg
NAME PLATE POSITION				-			
MATERIALS				STD. DETAILS			
BODY				A 283 C			
FLANGES				A 105			
BOLTS				A 307 B			
SUPPORT				A 283 C			
GASKETS				See SP. 1444/1			
SLEEVE				NYLON			