




GLOBE VALVE

SB-ATI-VD034

TYPE D 86

| | | | | | | | | |
|-------------------------|---------------|-----------------------|---|---------------------------|----------------|-------------------------------------|---------------|-------------------------------------|
| RATING | BODY150# | | | ASSEMBLING BODY BONNET | SCREWED BONNET | <input type="checkbox"/> | INSIDE SCREW | <input type="checkbox"/> |
| | ASSEMBLING | ASME B16.5 150# RF | | | BOLTED BONNET | <input checked="" type="checkbox"/> | OUTSIDE SCREW | <input checked="" type="checkbox"/> |
| MATERIALS | BODYA 216 WCB | | | | STEM | A 182 F6 | | |
| | SEATSA 182 F6 | | | | DISC | A 182 F6 | | |
| OPERATING CONDITIONS | P | / | T | / | USE : | / | | |

- NOTES:**
- (1) All gaskets have to be asbestos free
 - (2) All dimensions are in mm
 - (3) Face to Face dimensions in according to "ASME B16.10"
 - (4) "H" and "V" values are given as max. and indicative values

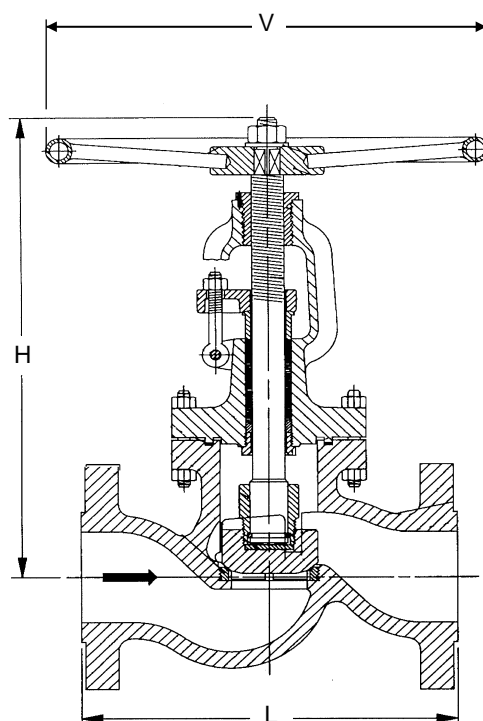

| INCH. | 1½" | 2" | 2½" | 3" | 4" | 5" | 6" | 8" | 10" | 12" | | | | | |
|-----------------------|------|------|------|------|------|------|-------|-------|-------|-------|--|--|--|--|--|
| L (3) | 165 | 203 | 216 | 241 | 292 | 356 | 406 | 495 | 622 | 699 | | | | | |
| H | 358 | 390 | 446 | 480 | 561 | 624 | 678 | 813 | 925 | 1087 | | | | | |
| V | 175 | 200 | 200 | 225 | 250 | 300 | 350 | 425 | 500 | 575 | | | | | |
| Weight Kg. | 16,0 | 21,0 | 30,0 | 37,0 | 60,0 | 90,0 | 108,0 | 167,0 | 238,0 | 408,0 | | | | | |

| 1 | REVISED | ATI | 21/11/06 | The master version of this document is stored as a digital file in a software archive - Approval process is digitally managed, details do not show on paper copies. |
|------|-------------|--------|----------|---|
| 0 | ISSUED | ATI | 31/01/05 | |
| Rev. | Description | Author | Date | |

We reserve the ownership under the law of this document with prohibition of even partial reproduction and to make it known to third persons without our written authorization