




GLOBE VALVE

SB-ATI-VD022

TYPE D 79

RATING	BODY 150#			ASSEMBLING BODY BONNET	SCREWED BONNET <input type="checkbox"/>	INSIDE SCREW <input type="checkbox"/>
	ASSEMBLING	ASME B16.5 150# RF			BOLTED BONNET <input checked="" type="checkbox"/>	OUTSIDE SCREW <input checked="" type="checkbox"/>
MATERIALS	BODY A 216 WCB				STEM	A 182 F6
	SEATS A 182 F6				DISC	A 182 F6 (STELLIT.)
OPERATING CONDITIONS	P	13 Bar	T	200° C	USE :	SATURATED STEAM & CONDENSATE

- NOTES:**
- (1) All gaskets have to be asbestos free
 - (2) All dimensions are in mm
 - (3) Face to Face dimensions in according to "ANSI B16.10"
 - (4) "H" and "V" values are given as max. and indicative values

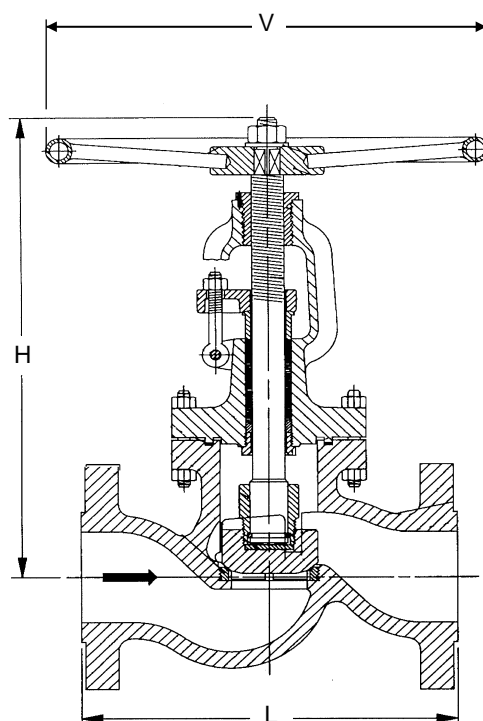

INCH.	1½"	2"	2½"	3"	4"	5"	6"	8"	10"	12"					
L (3)	165	203	216	241	292	356	406	495	622	699					
H	358	390	446	480	561	624	678	813	925	1087					
V	175	200	200	225	250	300	350	425	500	575					
Weight Kg.	16,0	21,0	30,0	37,0	60,0	90,0	108,0	167,0	238,0	408,0					

1	REVISED	ATI	21/11/06	The master version of this document is stored as a digital file in a software archive - Approval process is digitally managed, details do not show on paper copies.
0	ISSUED	ATI	31/01/05	
Rev.	Description	Author	Date	

We reserve the ownership under the law of this document with prohibition of even partial reproduction and to make it known to third persons without our written authorization