




GLOBE VALVE

SB-ATI-VD080

TYPE D 102

RATING	BODY	150#	ASSEMBLING BODY BONNET	SCREWED BONNET	<input type="checkbox"/>	INSIDE SCREW	<input type="checkbox"/>
	ASSEMBLING	ASME B16.5 150# RF		BOLTED BONNET	<input checked="" type="checkbox"/>	OUTSIDE SCREW	<input checked="" type="checkbox"/>
ERIALS	BODY	AISI 316	STEM	ASTM A 182 F316			
	SEATS	A 182 F316	WEDGE	ASTM A 182 F316			
OPERATING CONDITIONS	P	/	T	/	USE :	/	

- NOTES:**
- (1) All gaskets have to be asbestos free
 - (2) All dimensions are in mm
 - (3) Face to Face dimensions in according to "ANSI B16.10"

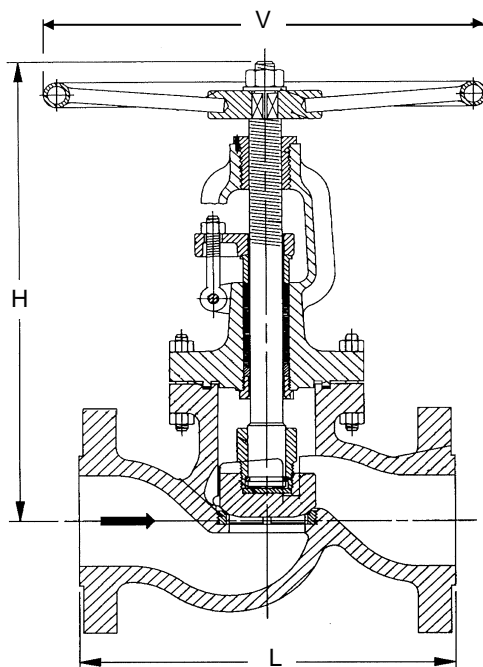

INCH.	1½"	2"	2½"	3"	4"	5"	6"	8"	10"	12"					
L (3)	165	203	216	241	292	356	406	495	622	699					
H	358	390	446	480	561	624	678	813	925	1087					
V	175	200	200	225	250	300	350	425	500	575					
Weight Kg.	16,0	21,0	30,0	37,0	60,0	90,0	108,0	167,0	238,0	408,0					

0	ISSUED	ATI	21/11/06	The master version of this document is stored as a digital file in a software archive - Approval process is digitally managed, details do not show on paper copies.
Rev.	Description	Author	Date	

We reserve the ownership under the law of this document with prohibition of even partial reproduction and to make it known to third persons without written our authorization