



STEAM TRAP THERMODYNAMIC

SB-ATI-VT005


TYPE T 66

RATING	BODY PN 63			ASSEMBLING BODY BONNET	SCREWED BONNET	<input checked="" type="checkbox"/>	INSIDE SCREW	<input type="checkbox"/>
	ASSEMBLING SOCKET WELDED				BOLTED BONNET	<input type="checkbox"/>	OUTSIDE SCREW	<input type="checkbox"/>
MATERIALS	BODY ASTM A 105				COVER	STAINLESS STEEL		
	STRAINER SCREEN STAINLESS STEEL				GASKET	STAINLESS STEEL		
	DISC STAINLESS STEEL							
OPERATING CONDITIONS	P	(5)	T	194° C use max	USE :	SATURATED STEAM		

NOTES:

- (1) All gaskets have to be asbestos free
- (2) All dimensions are in mm
- (3) All dimensions are indicatives and have to be checked with the supplier
- (4) Horizontal assembly is preferred
- (5) **DISCHARGE DELIVERIES (APPROX) Kg/h**

DIFFERENTIAL PRESSURE	4 Bar	8 Bar	12 Bar	
INCH. 1/2"	250	400	500	
INCH. 3/4"	450	600	750	
INCH. 1"	750	1100	1500	

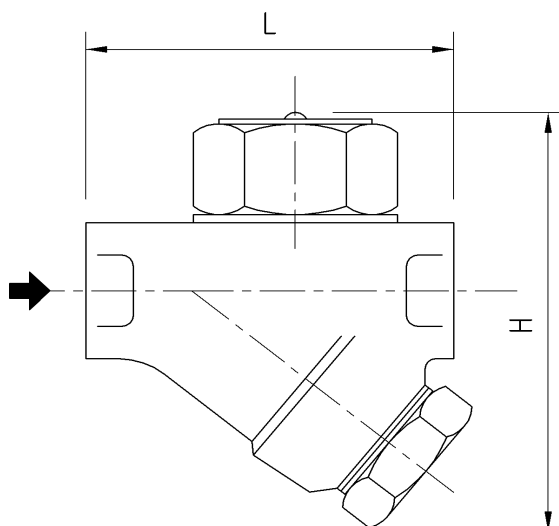

INCH.	1/2"	3/4"	1"												
DN	15	20	25												
L	78	90	95												
H	137	152	158												
Weight Kg.	0,8	0,95	1,5												

1	REVISED	ATI	21/11/06	The master version of this document is stored as a digital file in a software archive - Approval process is digitally managed, details do not show on paper copies.
0	ISSUED	ATI	31/01/05	
Rev.	Description	Author	Date	

We reserve the ownership under the law of this document with prohibition of even partial reproduction and to make it known to third persons without our written authorization