




BALL VALVE

SB-ATI-VS020

TYPE S 99

RATING	BODY	800#	FULL BORE	ASSEMBLING BODY BONNET	SCREWED BONNET	<input type="checkbox"/>
	ASSEMBLING	SCREWED ASME B1.20.1 NPT			BOLTED BONNET	<input type="checkbox"/>
MATERIALS	BODY	AISI 316	STEM	STAINLESS STEEL AISI 316		
	SEATS	TEFLON	BALL	STAINLESS STEEL AISI 316		
OPERATING CONDITIONS	P	/	T	/	USE :	/

- NOTES:**
- (1) All gaskets have to be asbestos free
 - (2) All dimensions are in mm
 - (3) Face to Face dimensions in according to "DIN 3202-F1"
 - (4) **VALVE:** type "ADLER 24K" or equivalent

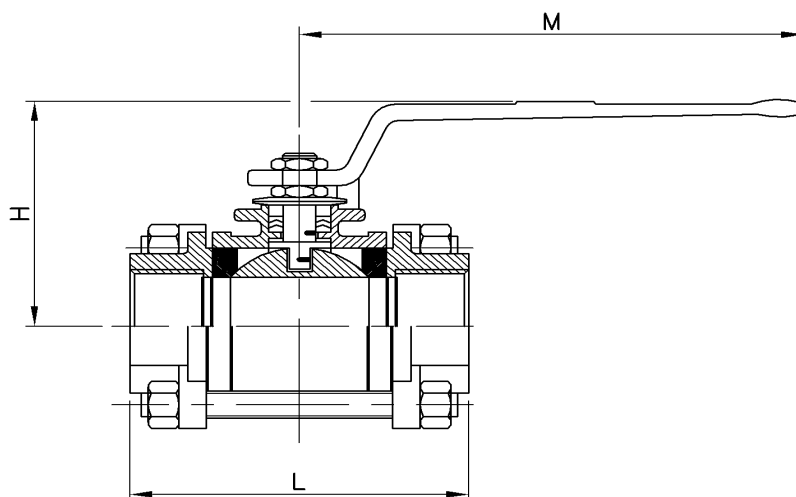

INCH.	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"				
DN	8	10	15	20	25	32	40	50	65	80	100				
L (3)	50	60	75	80	90	110	120	140	185	205	240				
H	45	45	59	62	80	85	103	111	134	142	167				
M	120	120	145	145	185	185	280	280	370	370	470				
Weight Kg.	0,6	0,6	0,7	0,9	1,4	1,9	3,2	5,2	12,5	15,0	24,0				

1	REVISED	ATI	23/11/06	The master version of this document is stored as a digital file in a software archive - Approval process is digitally managed, details do not show on paper copies.
0	ISSUED	ATI	31/01/05	
Rev.	Description	Author	Date	

We reserve the ownership under the law of this document with prohibition of even partial reproduction and to make it known to third persons without our written authorization