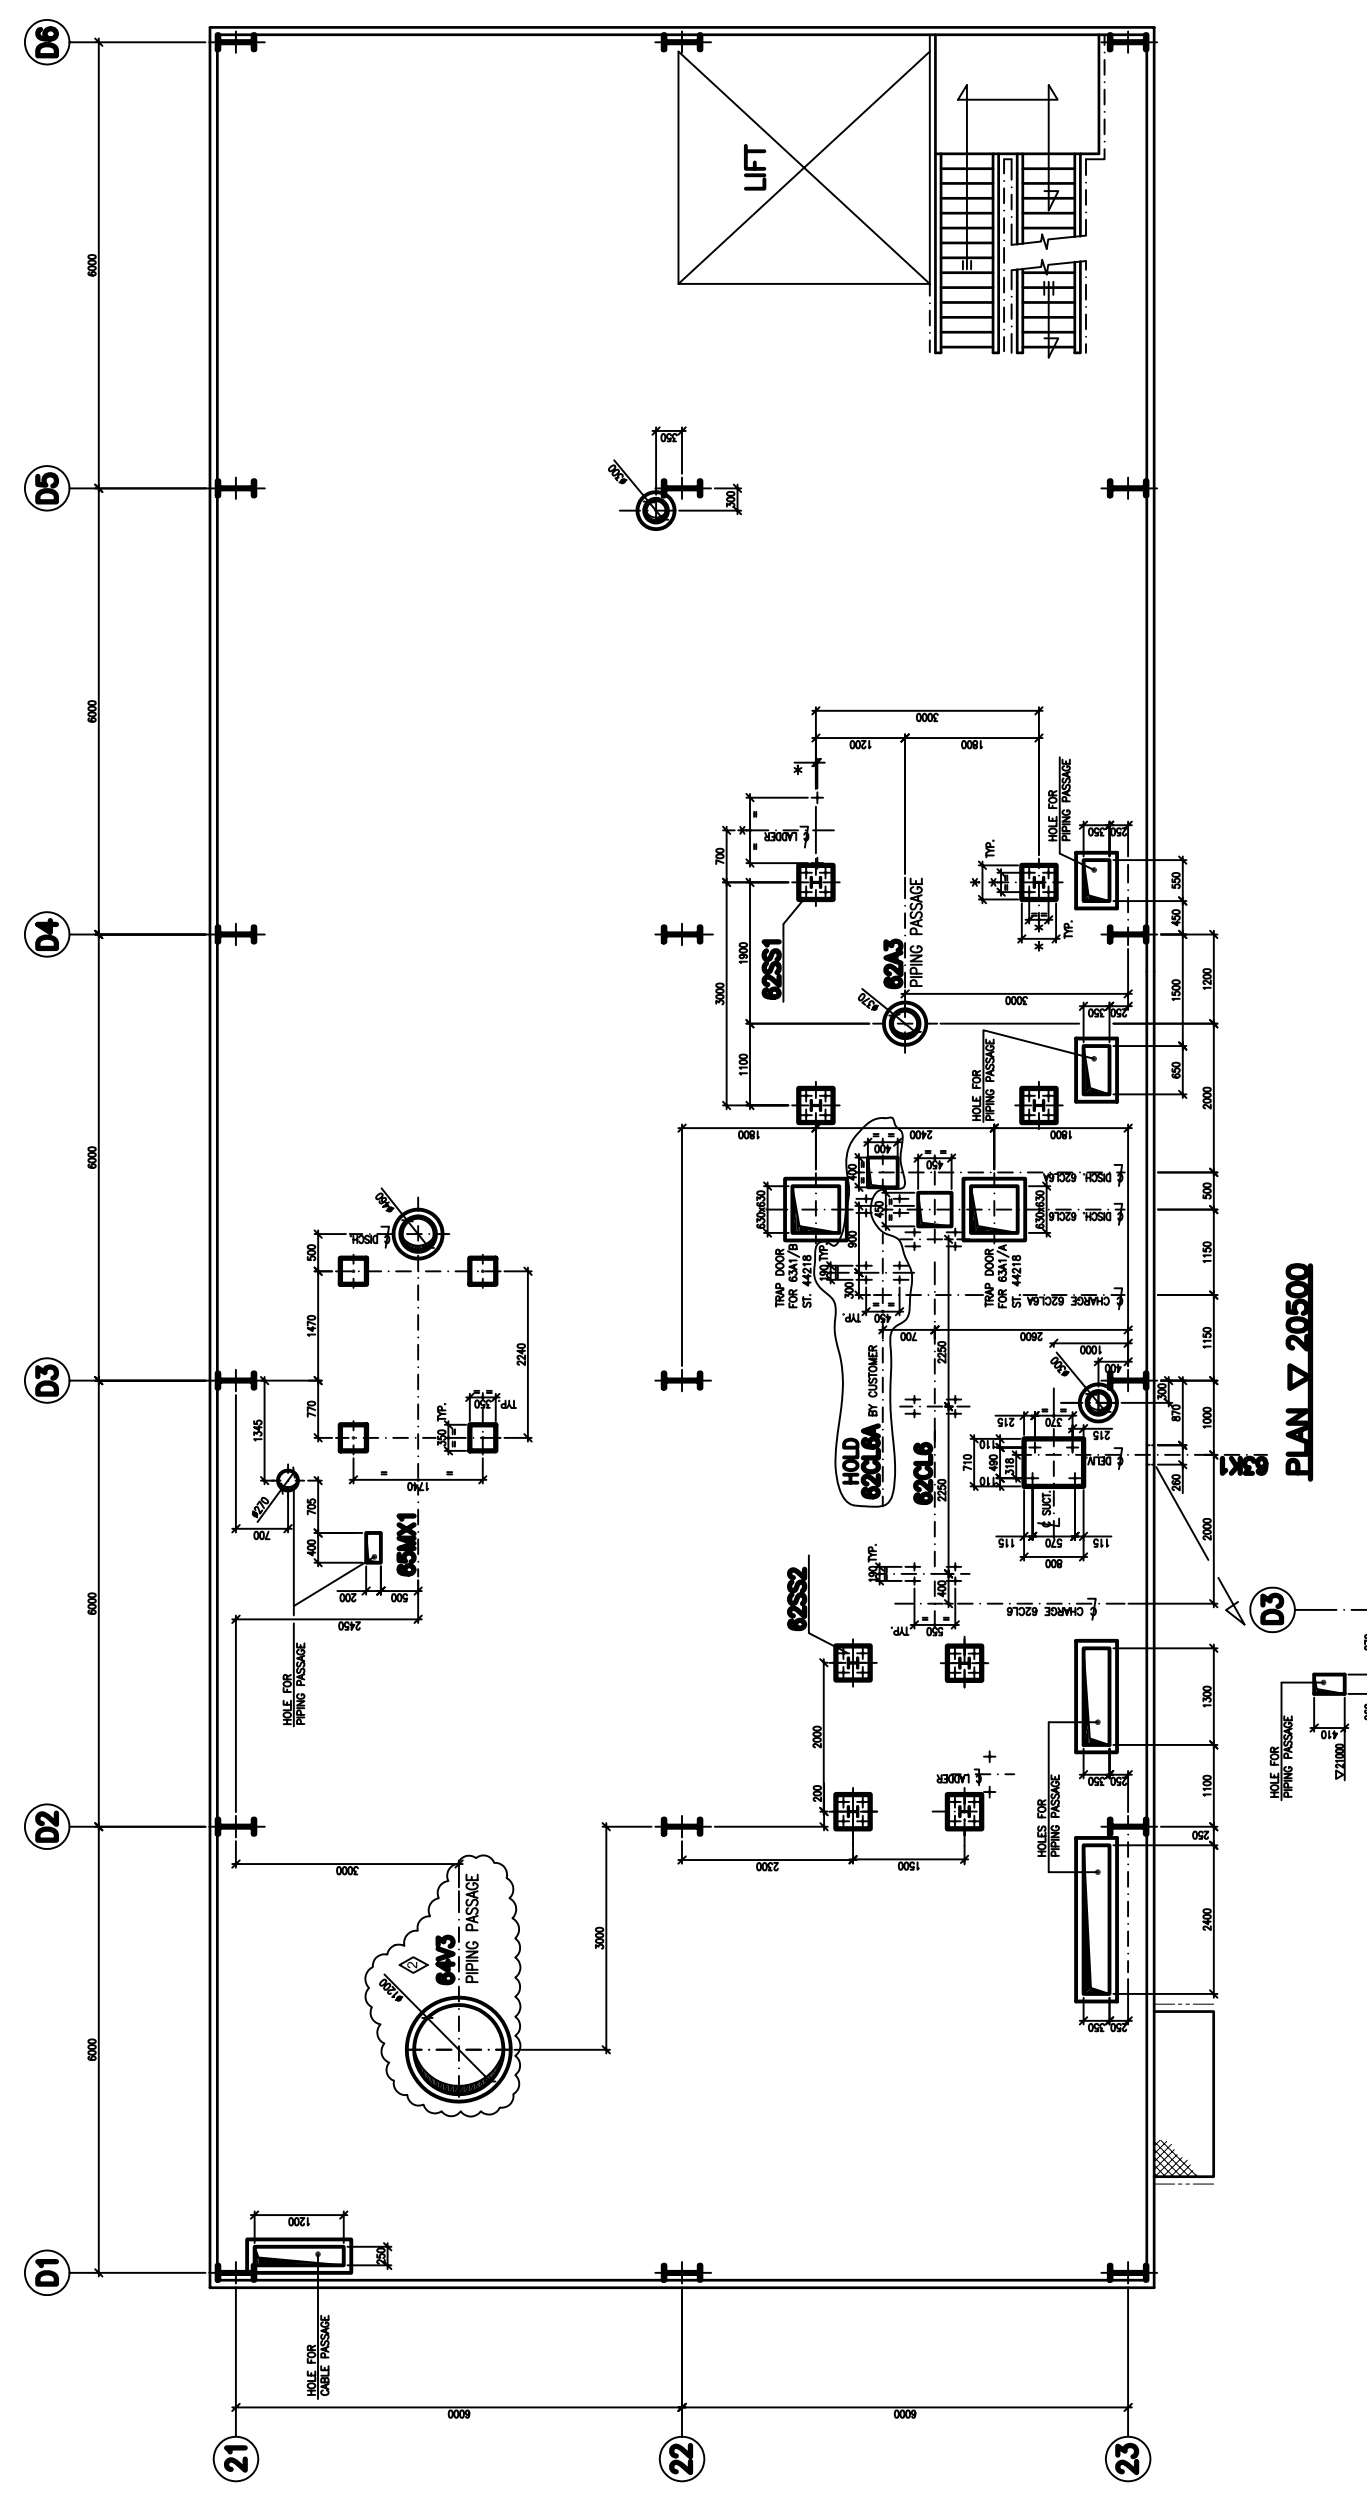


TYPICAL

A PROTECTION CURB TO BE PROVIDED ON ALL THE HOLES CROSSING THE CONCRETE FLOORS .
Ø FOR THE CURBS LOCATED OUTSIDE THE BUILDING IN THE UPPER PART CONSIDER 150 mm .

NOTE GENERALI
GENERAL NOTES

- [illegible]

[illegible]

PLAN V 20500