




GLOBE VALVE

SB-ATI-VD001

TYPE D 51

| | | | | | | | | | |
|-------------------------|------------|---|----------------------|---|---------------------------|---------------------|-------------------------------------|---------------|-------------------------------------|
| RATING | BODY | | 200# | | ASSEMBLING BODY BONNET | SCREWED BONNET | <input checked="" type="checkbox"/> | INSIDE SCREW | <input checked="" type="checkbox"/> |
| | ASSEMBLING | | SCREWED ANSI B2.1 | | | BOLTED BONNET | <input type="checkbox"/> | OUTSIDE SCREW | <input type="checkbox"/> |
| MATERIALS | BODY | | BRONZE | | | STEM | STAINLESS STEEL 13% Cr. | | |
| | SEATS | | BRONZE | | GASKETS | SYNTHETIC RUBBER | | DISC | BRASS |
| OPERATING CONDITIONS | P | / | T | / | USE : | / | | | |

- NOTES:**
- (1) All gaskets have to be asbestos free
 - (2) All dimensions are in mm
 - (3) Face to Face dimensions in according to "DIN 3202-M3"

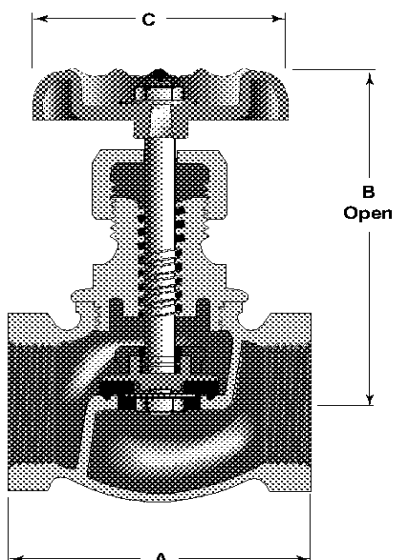

| INCH. | 1/4" | 3/8" | 1/2" | 3/4" | 1" | 1 1/4" | 1 1/2" | 2" | | | | | | | |
|------------|------|------|------|------|-----|--------|--------|-----|--|--|--|--|--|--|--|
| DN | 8 | 10 | 15 | 20 | 25 | 32 | 40 | 50 | | | | | | | |
| A (3) | 50 | 60 | 75 | 80 | 90 | 110 | 120 | 140 | | | | | | | |
| B | 109 | 109 | 115 | 135 | 150 | 200 | 210 | 235 | | | | | | | |
| C | 60 | 60 | 75 | 75 | 80 | 100 | 110 | 110 | | | | | | | |
| Weight Kg. | 0,6 | 0,6 | 0,7 | 0,8 | 1,7 | 3,0 | 3,45 | 4,7 | | | | | | | |

| 1 | REVISED | ATI | 21/11/06 | The master version of this document is stored as a digital file in a software archive - Approval process is digitally managed, details do not show on paper copies. |
|------|-------------|--------|----------|---|
| 0 | ISSUED | ATI | 31/01/05 | |
| Rev. | Description | Author | Date | |

We reserve the ownership under the law of this document with prohibition of even partial reproduction and to make it known to third persons without our written authorization