



GATE VALVE


SB-ATI-VG018

TYPE G 80

RATING	BODY 800#		ASSEMBLING BODY BONNET	SCREWED BONNET	<input type="checkbox"/>	INSIDE SCREW	<input type="checkbox"/>
	ASSEMBLING	SOCKET WELDED (ASME B16.11)		BOLTED BONNET	<input checked="" type="checkbox"/>	OUTSIDE SCREW	<input checked="" type="checkbox"/>
MATERIALS	BODY	ASTM A 105		STEM	ASTM A 182 F6		
	SEATS	ASTM A 182 F6		WEDGE	ASTM A 182 F6 (SINGLE PIECES WEDGE)		
	BODY BONNET GASKET	SPIRAL WOUND					
TEST PRESSURE	BODY	HYDRAULIC 206,8 (Bar)		SEATS & BACK-SEATS	HYDRAULIC 151,7 (Bar)		
	SEATS	PNEUMATIC 6 (Bar)					
OPERATING CONDITIONS	P	/	T	/	USE : (4)		

NOTES:

- (1) All gaskets have to be asbestos free
- (2) All dimensions are in mm
- (3) All dimensions are indicatives and have to be checked with the supplier
- (4) SODIUM SILICATE SOLUTION - FUEL OIL - FUEL GAS - NATURAL GAS - OLEUM - LIQUID RAW MATERIAL and CAUSTIC SODA (from B.L. up to DEPARTMENT FILTERS) - L.P. SLURRY - SO3 LOW TEMPERATURE (up to SO3 FILTERS) - EXHAUST GAS (from CYCLON up to ELECTRIC FILTERS and GAS SCRUBBER)

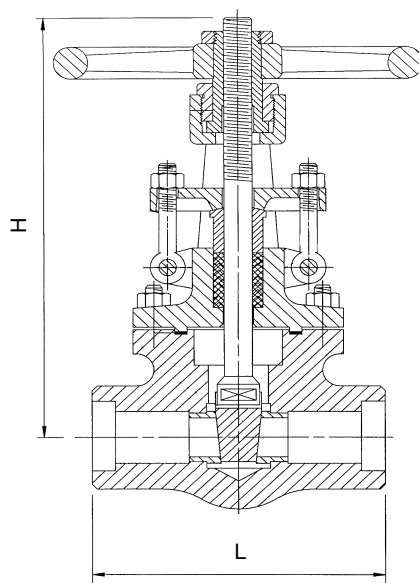

DN	15	20	25	40										
L	70	86	102	140										
H	160	200	220	260										
Weight Kg.	2,0	3,0	5,0	10,0										

				The master version of this document is stored as a digital file in a software archive - Approval process is digitally managed, details do not show on paper copies.
0	ISSUED	ATI	24/11/06	
Rev.	Description	Author	Date	

We reserve the ownership under the law of this document with prohibition of even partial reproduction and to make it known to third persons without written authorisation