




BALL VALVE

SB-ATI-VS014

TYPE S 87

RATING	BODY200#			FULL BORE	ASSEMBLING BODY BONNET	SCREWED BONNET	<input type="checkbox"/>
	ASSEMBLING	SCREWED ASME B1.20.1 NPT				BOLTED BONNET	<input type="checkbox"/>
MATERIALS	BODYBRASS NICKEL-PLATED				GASKETS	PTFE	
	SEATS/				BALL	BRASS THICK. CHROM-PLATED	
OPERATING CONDITIONS	P	/	T	/	USE :	/	

- NOTES:**
- (1) All gaskets have to be asbestos free
 - (2) All dimensions are in mm
 - (3) Face to Face dimensions in according to DIN 3202-M3 for 1/4"±2"
M5 for 2 1/2"±3"

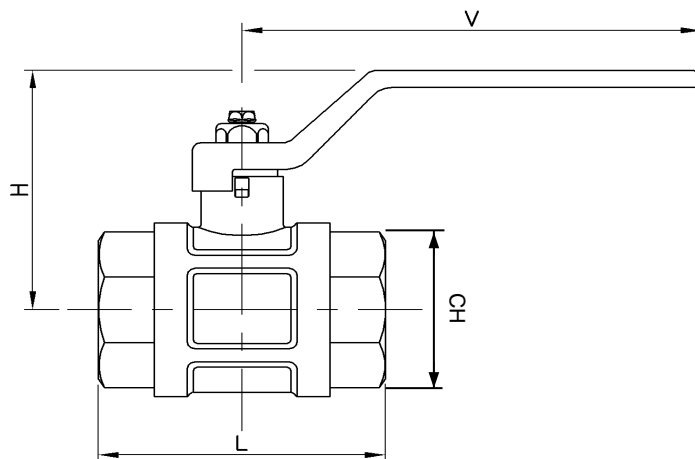

INCH.	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"					
DN	8	10	15	20	25	32	40	50	65	80					
L (3)	55	60	75	80	90	110	120	140	132	160					
H	58	58	68	75	90	100	122	136	130	150					
V	85	85	85	85	103	103	135	135	250	250					
CH	22	22	26	32	38	48	55	68	83	98					
Weight Kg.	0,20	0,20	0,30	0,40	0,60	1,00	1,50	2,20	4,80	7,60					

1	REVISED	ATI	23/11/06	The master version of this document is stored as a digital file in a software archive - Approval process is digitally managed, details do not show on paper copies.
0	ISSUED	ATI	31/01/05	
Rev.	Description	Author	Date	

We reserve the ownership under the law of this document with prohibition of even partial reproduction and to make it known to third persons without our written authorization