



GATE VALVE


SB-ATI-VG001

TYPE G 61

RATING	BODY		800#		ASSEMBLING BODY BONNET	SCREWED BONNET		<input type="checkbox"/>	INSIDE SCREW		<input type="checkbox"/>
	ASSEMBLING		SOCKET WELDED (ASME B16.11)			BOLTED BONNET		<input checked="" type="checkbox"/>	OUTSIDE SCREW		<input checked="" type="checkbox"/>
MATERIALS	BODY		ASTM A 105			STEM		ASTM A 182 F6A			
	SEATS		ASTM A 182 F6A STELLITED			WEDGE		ASTM A 182 F6A STELLITED (SINGLE PIECES WEDGE)			
	BODY BONNET GASKET		METALL / PLASTIC								
TEST PRESSURE	BODY		HYDRAULIC 206,8 (Bar)			SEATS & BACK-SEATS		HYDRAULIC 151,7 (Bar)			
	SEATS		PNEUMATIC 6 (Bar)								
OPERATING CONDITIONS	P	/	T	/	USE :		SATUREATED STEAM BOILER FEED WATER				

NOTES:

- (1) All gaskets have to be asbestos free
- (2) All dimensions are in mm
- (3) All dimensions are indicatives and have to be checked with the supplier

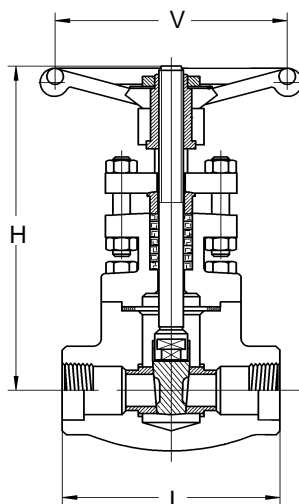

INCH.	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"							
DN	8	10	15	20	25	32	40	50							
L	80	80	80	90	110	127	127	130							
H	140	140	140	166	181	215	251	276							
V	90	90	90	90	107	107	142	142							
Weight Kg.	1,7	1,7	1,7	2,1	3,3	5,2	7,0	9,1							

1	REVISED	ATI	24/11/06	The master version of this document is stored as a digital file in a software archive - Approval process is digitally managed, details do not show on paper copies.
0	ISSUED	ATI	31/01/05	
Rev.	Description	Author	Date	

We reserve the ownership under the law of this document with prohibition of even partial reproduction and to make it known to third persons without our written authorization