




GATE VALVE

SB-ATI-VG005

TYPE G 68

RATING	BODY150#			ASSEMBLING BODY BONNET	SCREWED BONNET	<input type="checkbox"/>	INSIDE SCREW	<input type="checkbox"/>
	ASSEMBLING	ASME B16.5 150# RF			BOLTED BONNET	<input checked="" type="checkbox"/>	OUTSIDE SCREW	<input checked="" type="checkbox"/>
MATERIALS	BODYA 216 WCB				STEM	A 182 F6		
	SEATSA 182 F6				WEDGE	A 182 F6 (STELLITED)		
OPERATING CONDITIONS	P	/	T	/	USE :	/		

- NOTES:**
- (1) All gaskets have to be asbestos free
 - (2) All dimensions are in mm

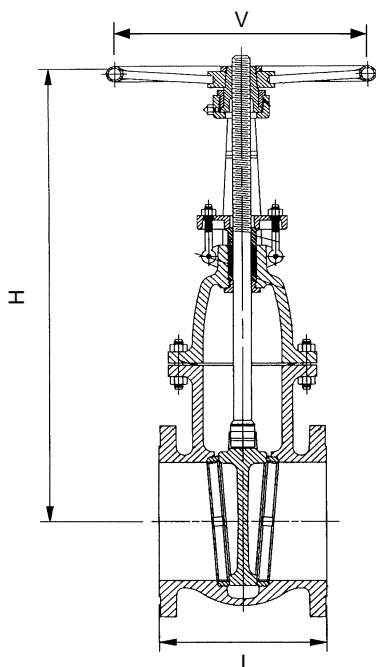

INCH.	2"	2½"	3"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	24"	
L	178	191	203	229	254	267	292	330	356	381	406	432	457	508	
H	395	450	520	650	750	860	1065	1260	1475	1640	1960	2130	2460	2755	
V	200	200	225	250	250	300	425	500	500	575	650	650	720	800	
Weight Kg.	18,0	29,0	35,0	50,0	69,0	80,0	135,0	185,0	280,0	395,0	530,0	670,0	775,0	1150,0	

0	ISSUED	ATI	24/11/06	The master version of this document is stored as a digital file in a software archive - Approval process is digitally managed, details do not show on paper copies.
Rev.	Description	Author	Date	

We reserve the ownership under the law of this document with prohibition of even partial reproduction and to make it known to third persons without written authorisation