




CHECK VALVE

SB-ATI-VR042

TYPE R 101

| | | | | |
|-----------------------------|------------|----------------------------|----------------|----------|
| RATING | BODY | 150# | | |
| | ASSEMBLING | ASME B16.5 150# RF-S.O. | | |
| MATERIALS | BODY | AISI 316 | O-RING GASKETS | PTFE |
| | SEATS | / | DISC | AISI 316 |
| OPERATING CONDITIONS | P | / | T | / |
| | USE : | | / | |

- NOTES:**
- (1) All gaskets have to be asbestos free
 - (2) All dimensions are in mm
 - (3) The valves with the counterweight must be mounted only on horizontal piping
 - (4) Above DN 6" the valves can be supplied complete with counterweight

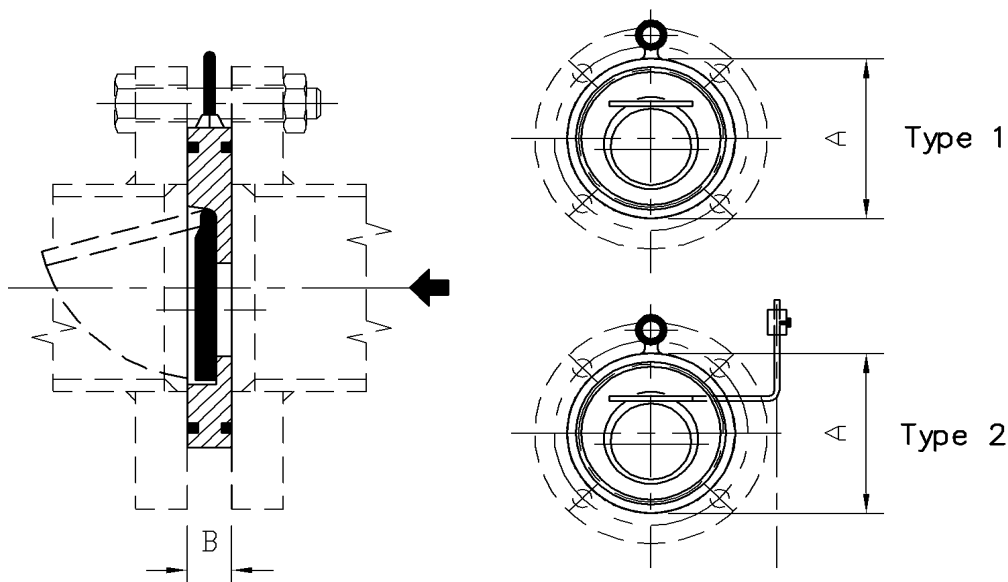

| INCH. | 1½" | 2" | 2½" | 3" | 4" | 5" | 6" | 8" | 10" | 12" | 14" | 16" | 18" | 20" | |
|-------------------|-----|-----|-----|-----|-----|-----|-----|------|------|------|------|------|------|-------|--|
| A | 82 | 102 | 124 | 137 | 175 | 197 | 222 | 279 | 340 | 410 | 451 | 514 | 549 | 606 | |
| B | 14 | 14 | 14 | 14 | 14 | 16 | 19 | 29 | 32 | 38 | 41 | 51 | 51 | 61 | |
| Weight Kg. | 0,7 | 1,1 | 1,4 | 1,7 | 2,2 | 3,4 | 5,6 | 12,0 | 17,0 | 28,0 | 42,5 | 64,0 | 72,0 | 125,0 | |

| 1 | REVISED | ATI | 27/11/06 | The master version of this document is stored as a digital file in a software archive - Approval process is digitally managed, details do not show on paper copies. |
|------|-------------|--------|----------|---|
| 0 | ISSUED | ATI | 31/01/05 | |
| Rev. | Description | Author | Date | |

We reserve the ownership under the law of this document with prohibition of even partial reproduction and to make it known to third persons without our written authorization