



# 3 WAY BALL VALVE


**SB-ATI-VS025**

**TYPE S 103**

RATING	BODY		150#		FULL BORE		
	ASSEMBLING		ASME B16.5 150# RF				
MATERIALS	BODY		AISI 316			STEM	AISI 316
	SEATS		PTFE			BALL	AISI 316
OPERATING CONDITIONS	P	(5)	T	(5)	USE :	/	

**NOTES:**

- (1) All gaskets have to be asbestos free
- (2) All dimensions are in mm
- (3) Face to Face dimensions in according to "DIN 3202-F1"
- (4) **SCREWS:** ASME B18.2.1/UNC - ASTM A193 B7
- (5) **P=15 BAR with T=60° C - P=11 BAR with T=100° C - P=7 BAR with T=150° C**

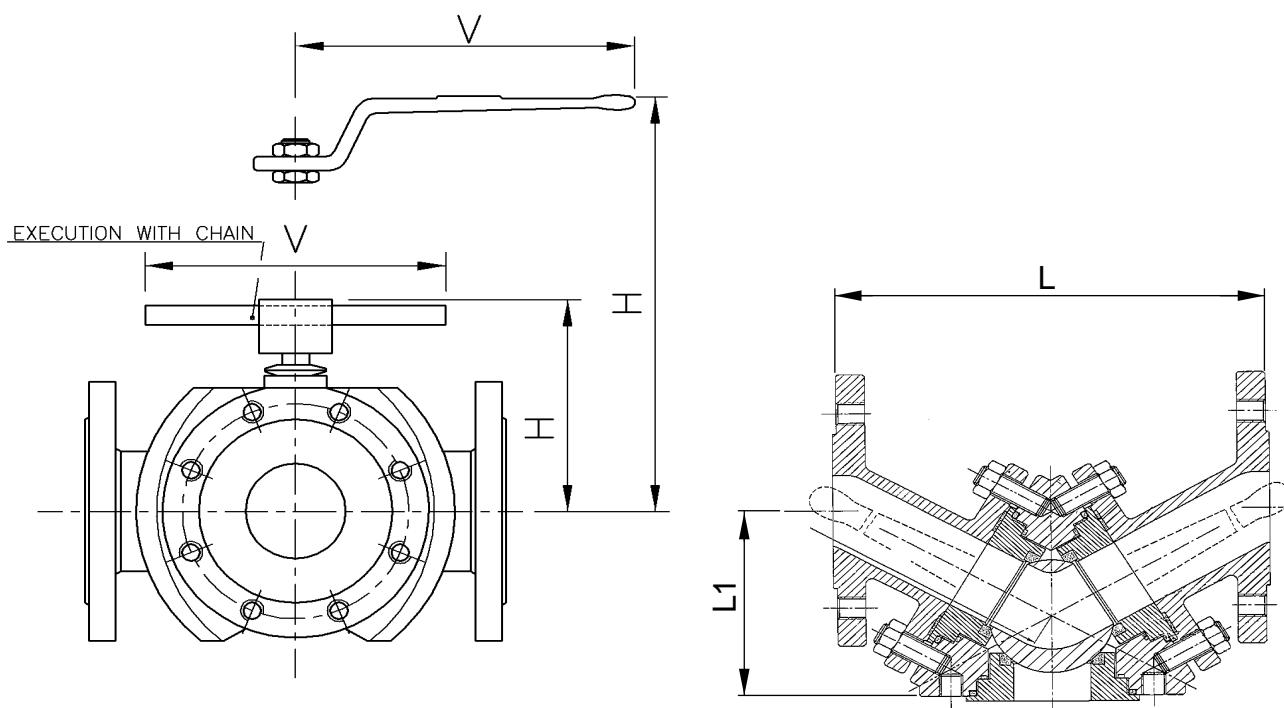

INCH.	1½"	2"	2½"	3"	4"	5"	6"	8"							
<b>L (3)</b>	200	230	290	310	350	400	480	600							
<b>L1</b>	100	115	145	155	175	200	240	300							
<b>H</b>	103	111	134	142	167	181	235	277							
<b>V</b>	280	280	370	370	470	470	600	745							
<b>SCREWS (4)</b>	<b>N°</b>	12	12	12	12	24	24	24	24						
	<b>DIMEN.</b>	½"x40	⅝"x40	⅝"x45	⅝"x45	⅝"x50	¾"x50	¾"x55	¾"x55						
<b>Weight Kg.</b>	<b>13,0</b>	<b>18,0</b>	<b>33,0</b>	<b>40,0</b>	<b>56,0</b>	<b>83,0</b>	<b>106,0</b>	<b>180,0</b>							

2	REVISED OPERATING CONDITIONS	ATI	16/07/07	The master version of this document is stored as a digital file in a software archive - Approval process is digitally managed, details do not show on paper copies.
1	REVISED	ATI	23/11/06	
0	ISSUED	ATI	31/01/05	
<b>Rev.</b>	<b>Description</b>	<b>Author</b>	<b>Date</b>	

We reserve the ownership under the law of this document with prohibition of even partial reproduction and to make it known to third persons without our written authorization