	desmet ballestra	
1	Desmet Ballestra s.p	.a

FREE PASSAGE 0,64x0,64mm


0,36mm

WIRE DIA.

"Y" STRAINER

SB-ATI-VF018

desmet E	Ballestra s.p.a.						TYPE	F 7)
RATING	BODY	PN 16		AS	SEMBLING	SCREWED BONN	ET X	INSIDE SCREW	
	ASSEMBLING	SCREWED ASME B2.1		BOI	DY BONNET	BOLTED BONNET		OUTSIDE SCREW	
MATERIALS	BODY	BRONZE				BONNET	BRONZE		
	BASKET	AISI 304 ((4)			GASKET	1		
OPERATING CONDITIONS	Р	1	Т		1	USE :	1		
NOTES: (1)	All gaskets have	to be asbestos	free						
(2)	All dimensions a	are in mm							
(3)	Face to Face di	mensions in acc	ording to D	IN 3202	2-M5 for 3/8"-11 M14 for 1/2"-3				
(4)	MESH	25.4							

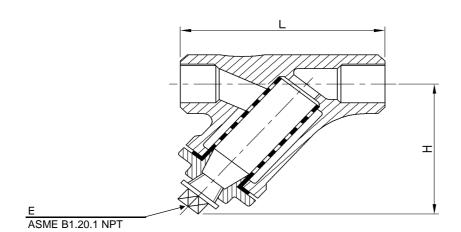

INCH.	3/8"	1/2"	3/4"	1"	11/4"	1½"	2"				
DN	10	15	20	25	32	40	50				
L (3)	55	55	60	68	95	100	112				
н	46	53	63	74	80	88	140				
E	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"				
Weight Kg.	0,35	0,50	0,80	1,20	1,80	2,20	5,0				

Rev.	Description	Author	Date	ľ
0	ISSUED	ATI	31/01/05	ld
1	REVISED	ATI	24/11/06	ir
				Т

The master version of this document is stored as a digital file in a software archive - Approval process is digitally managed, details do not show on paper copies.