

PLAN FROM ∇ 15400 TO ∇ 20500

REFERENCE DRAWINGS	
DESCRIPTION DRAWINGS	NUMBER DRAWINGS
PLOT PLAN	2F11-20-101
FOUNDATION PLAN	2F11-55-101
KEY-PLAN	2F11-60-100
P.& I. DIAGRAM - SOLID PROPORTIONING - SECTION 62	2F11-10-103 SH.1
P.& I. DIAGRAM - OFF. SPEC. POWDER DISSOLVING/RECOVERING - SECTION 62	2F11-10-103 SH.2
P.& I. DIAGRAM - SLURRY PREPARATION - SECTION 62/63	2F11-10-104 SH.1
P.& I. DIAGRAM - SLURRY HOMOGENEIZING AND PUMPING - SECTION 63	2F11-10-104 SH.2
P.& I. DIAGRAM - SPRAY DRYING - SECTION 64	2F11-10-105 SH.1
P.& I. DIAGRAM - ZEOLITE DOSING TO SPRAY-DRYING TOWER - SECTION 64	2F11-10-105 SH.2
P.& I. DIAGRAM - CONTINUOUS POST BLENDING - SECTION 65	2F11-10-106 SH.1
P.& I. DIAGRAM - PACKAGING SYSTEM - SECTION 65	2F11-10-106 SH.2
UTILITIES PLANIMETRIC DIAGRAM	2F11-12-101
PIPING CONNECTION FOR INSTRUMENT	SB-ATI-PV001/0
INSULATION SPECIFICATION	SB-ATI-SP030/0
WATER TRACINGS SPECIFICATION	SB-ATI-SP037/0
STEAM TRACINGS SPECIFICATION	SB-ATI-SP036/0
SKETCHES FOR DEDUSTING NETWORK	2F11-60-110
"Y" PIECES LIST —	2F11-65-113
PIPING SUPPORT LAY-OUT AREA 2	2F11-60-111

NOTE GENERALI — GENERAL NOTES

- 1 \forall ELEVAZIONE FONDO TUBO O ELEVAZIONE GENERICA. ELEVATION TO PIPE BOTTOM OR GENERAL ELEVATION.
- 2 ▼ ELEVAZIONE ASSE TUBO.

 ELEVATION TO PIPE CENTERLINE.
- 3 X Z Z Z ELEVAZIONE ASSE VALVOLA.


 ELEVATION TO VALVE CENTERLINE.
- 4 _____
 ELEVAZIONE FACCIA INFERIORE FLANGIA.

 ELEVATION TO BOTTOM FACE OF FLANGE.
- 5 _____ ELEVAZIONE FACCIA SUPERIORE FLANGIA.

 ELEVATION TO TOP FACE OF FLANGE.
- ALL VERTICAL DIMENSIONS ARE REFERRED TO PLANT ELEVATION ♥ 0.00 CORRESPONDING TO (mt......A.S.L.) PREVEDERE SFIATI SUI PUNTI ALTI E DRENAGGI NEI PUNTI PIU' BASSI DELLE TUBAZIONI. GLI SFIATI E I DRENAGGI PER LE LINEE DN <=65 (2½") DOVRANNO ESSERE DA DN 15 (1/2"). GLI SFIATI E I DRENAGGI PER LE LINEE DN >=80 (3") DOVRANNO ESSERE DA DN 20 (3/4").

- PROVIDE VENTS AT HIGHEST POINT AND DRAINS AT LOWEST POINTS OF LINES. VENTS AND DRAINS FOR THE LINES DN <=65 (2½") WILL HAVE TO BE DN 15 (1/2"). VENTS AND DRAINS FOR THE LINES DN >=80 (3") WILL HAVE TO BE DN 20 (3/4").
- I COLLEGAMENTI DELLE TUBAZIONI DEI SERVIZI CON DN <= 15 (1/2") TRA I COLLETTORI E LE APPARECCHIATURE O LE INCAMICIATURE (FATTA ECCEZIONE PER LE APPARECCHIATURE E LE TUBAZIONI DELLO ZOLFO) DOVRANNO ESSERE STABILITI IN CANTIERE E NON SONO, PERTANTO, INDICATI SULLA TAVOLA DI MONTAGGIO.
- THE CONNECTIONS OF UTILITIES PIPES DN <= 15 (1/2") BETWEEN MANIFOLDS AND EQUIPMENTS OR JACKETED PIPES (WITH EXCEPTION OF SULPHUR EQUIPMENTS AND PIPES) SHALL BE ESTABLISHED ON SITE AND THEREFORE ARE NOT INDICATED ON THE PIPING ARRANGEMENT DRAWINGS.
- 9 TUTTE LE DIMENSIONI SONO IN mm. SALVO DIVERSAMENTE INDICATO.

 ALL DIMENSIONS ARE IN mm. UNLESS OTHERWISE INDICATED.

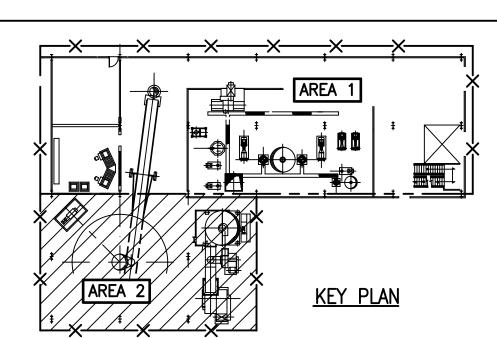

M.B. M.B. DRAWN Autore ignature is visible on the non sono visibili sul	documento.
DRAWN Autore ignature is visible on th ne non sono visibili sul	DATE Data e document. documento.
Autore ignature is visible on the ne non sono visibili sul	Data e document. documento.
ne non sono visibili sul	documento.
DRAWING Nr. / Disea	N.
	0-102-4
CUSTOMER Nr. / Nr.	Cliente
SHEET Foglio	4/8
SHEET REVISION Revisione Foglio	1
SCALE 1:33	-
	-
	Scala SECTION Sezione t third persons without of

NOZZLE CHART EQUIPMENTS COORDINATES ORIENTATION ITEM FROM EQUIP. NORTH EAST ELEV. 0°=NORTH 180°=DOWN 180° 45° EXPL. PROOF DOOK FOUNDATION POS. SIZE RATING FROM ELEVATION 64AT1