
S4-

1600

3700

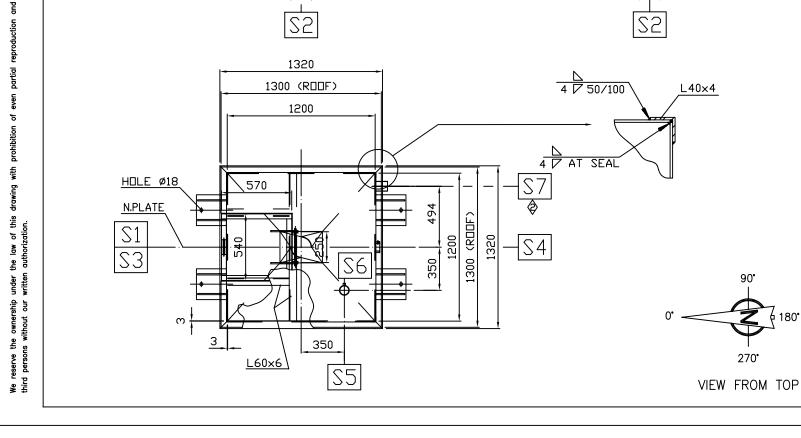

S6 S5

L60×6

ø168

810

40

<> 4

S1 S5

350

494

200 250 300

1194

23

\$S7

NAME PLATE

<u>3</u>D

L60×6

S1

L60×6

L60×6

810

L60×6

400

40_

W.L.

23

3

Rev. Date			ITEM	65	<u>√7</u>	CUSTON		DDIT	IONAL	SOLIDS		DWG	2F11			
1	des	met ballest		QUIRED	1	PLANT	SAE	BIZ		JOB					1	
1 12.06.12 F.C. ISSUED FOR CONSTRUCTION — ORIENTATION DEFINED 2 09.07.12 F.C. ISSUED FOR CONSTRUCTION — MODIFIED WHERE INDICATED WITH ♦ 3 3 4 5 5 6 7 6 7 6 7 6 7 6 7 6 7 6 7 6 7 6 7																
2	<u> </u>									ATION DEEL	NED					
3	<u> </u>	+	_									VITU A				
1		09.07.17	² F.C.	ISSUEL) FUR	CONST	RUCIIC	<u> </u>	MODIFIE	U WHERE	INDICATED V	MILL &				
THE MASTER VERSION OF THIS DOCUMENT IS STORED AS A DIGITAL FILE IN A DATABASE - APPROVAL PROCESS IS DIGITALLY MAN NO BIGGAPHIZE IS VISIBLE DIN THE DOCUMENT SERVICE THIC MOZZIES DESIGN PRESSURE Be (a) -0,03																
NO SIGNATURE IS VISIBLE DISTRICE NOZZLES DESIGN DATA SHELL JACKET																
POS SIZE RATING N SERVICE THIK, NOZZIES SOOS AS DWG 1 MANUAL CHARGING - 0" DESIGN PRESSURE 8" (a) 0.03								A DIG	ITAL FILE	IN A DATA	BASE - APPROV	/AL PROCE	SS IS DIGI	TALLY M	ANA	
SS		_		NOZZ	LES					C	ESIGN DAT	A	SHELL	JACKET		
S1 500 A5 DWG 1 PRODUCTO UTLET 3 4 HYDROSTATIC TEST PRESSURE 89 (9) -	POS		RATING	N°	!	SERVICE		THK.	ORIENT.	OPERATING	PRESSURE	Bar	(g) 0 -0.0	1		
S3	S 1	500x 500	AS DW	'G 1	MAN	UAL CHA	RGING	_	0°	DESIGN PF	RESSURE	Bar	(g) <u>-0.03</u>	3		
S4 2 2 2 2 2 2 2 2 2	S2		AS DW	'G 1	3 1 PRODUC		T OUTLET		<u></u>	HYDROSTATIO	TEST PRESSU	RE Bar	(g) —			
S4 2 2 2 2 2 2 2 2 2	S3		UNI ISO	7/1 1	LSL	CONNEC	CTION	11.13	0.	PNEUMATIC	TEST PRESSURI	Bar	(g)		\int	
SE 1/4"T ASWE BI.20" 1 P CONNECTION - AS DWG FLUID/SPECIFIC WEIGHT 0.4-0.7 xs/a/m3 ASDWG SUDS SUDS	S4	Rp 2 1/2"	UNI ISO	7/1 1	LSH	CONNEC	CTION	11.13	180°	OPERATING	TEMPERATUR	E	·c 40			
ST	S5	øe80			DED	USTING		3	AS DWG				·c 65			
ST	S6	1/4"F	ASME B1.2 NPT 3000	20.1	P C	ONNECTI	ON	_	AS DWG	FLUID/SPE	CIFIC WEIGHT	0.4-0.7 Kg/dr		1		
X-RAY TEST	\$ S7	Øe80			DED	USTING		3	AS DWG	HEAT EXCH	HANGE SURFA	CE	m2 —			
PENETRATING LIQUIDS TEST -										HEAT TREA	TMENT		_			
JOINT EFFICIENCY 0,7										X-RAY TES	ST		-		Ť	
CORROSION ALLOWANCE mm - GEOMETRIC CAPACITY 1841 3500 INSPECTION INSTITUTE CUSTOMER AS DWG										PENETRATII	NG LIQUIDS T	EST	_		Ì	
GEOMETRIC CAPACITY 1570										JOINT EFFICIENCY			0,7			
INSPECTION INSTITUTE CUSTOMER										CORROSION	ALLOWANCE		mm —		T	
BRACKETS POSITION										GEOMETRIC	CAPACITY		litri 3500)		
BRACKETS POSITION										INSPECTION INSTITUTE			C	JSTOMI	ER	
AS DWG		-							AS DWG	CODE					R/	
AS DWG AS DWG AS DWG AS DWG AS DWG AS DWG		DACKET	C DOCITI	ΟN					AS DWG							
NAME PLATE POSITION 0" STD. DETAILS ENCLOSED DWG		NACKEI	3 FUSIII	ON					AS DWG							
MATERIALS STD. DETAILS ENCLOSED DWG									AS DWG	EMPTY	570∼ ĸ	g OPERA1	ING	3000	~	
SHELL / COVER	N/	AME PL	ATE POS	TION					0*							
NOZZLES				MATE	RIAL	S								ENCLOSED DWG		
NOZZLES FROM PLATE A 283 Gr. C NAME PLATE SB-PRS-0012	-		OVER							+				SB-ATI-SP002		
See SB-SP-1444/1 NAME PLATE HOLDER SB-PRS-0012	-		DOM 5: :==													
SECTION IRON A 36 MANUAL CHARGING "S1" SB-ST-41071 BRACKETS A 283 Gr. C LEVEL INDICATOR "S3-S4" SB-SP-1365/	-															
BRACKETS A 283 Gr. C LEVEL INDICATOR "S3-S4" SB-SP-1365/)-3Y-	1 444 / l							
INSULATION: NO								Gr.	С				+			
	Div	AORETS					71 200	01.		LEVEL IIVD	IONION 30 N	J T	35 31	750	_	
				,												
NOTE . S COMPLETE WITH INTERNAL GRID										INSULATION	N : NO					
	NOT	r. 🗪		T ⊏ \\\/\⊤	דואו 📙	LEBKIVI	CDID									