


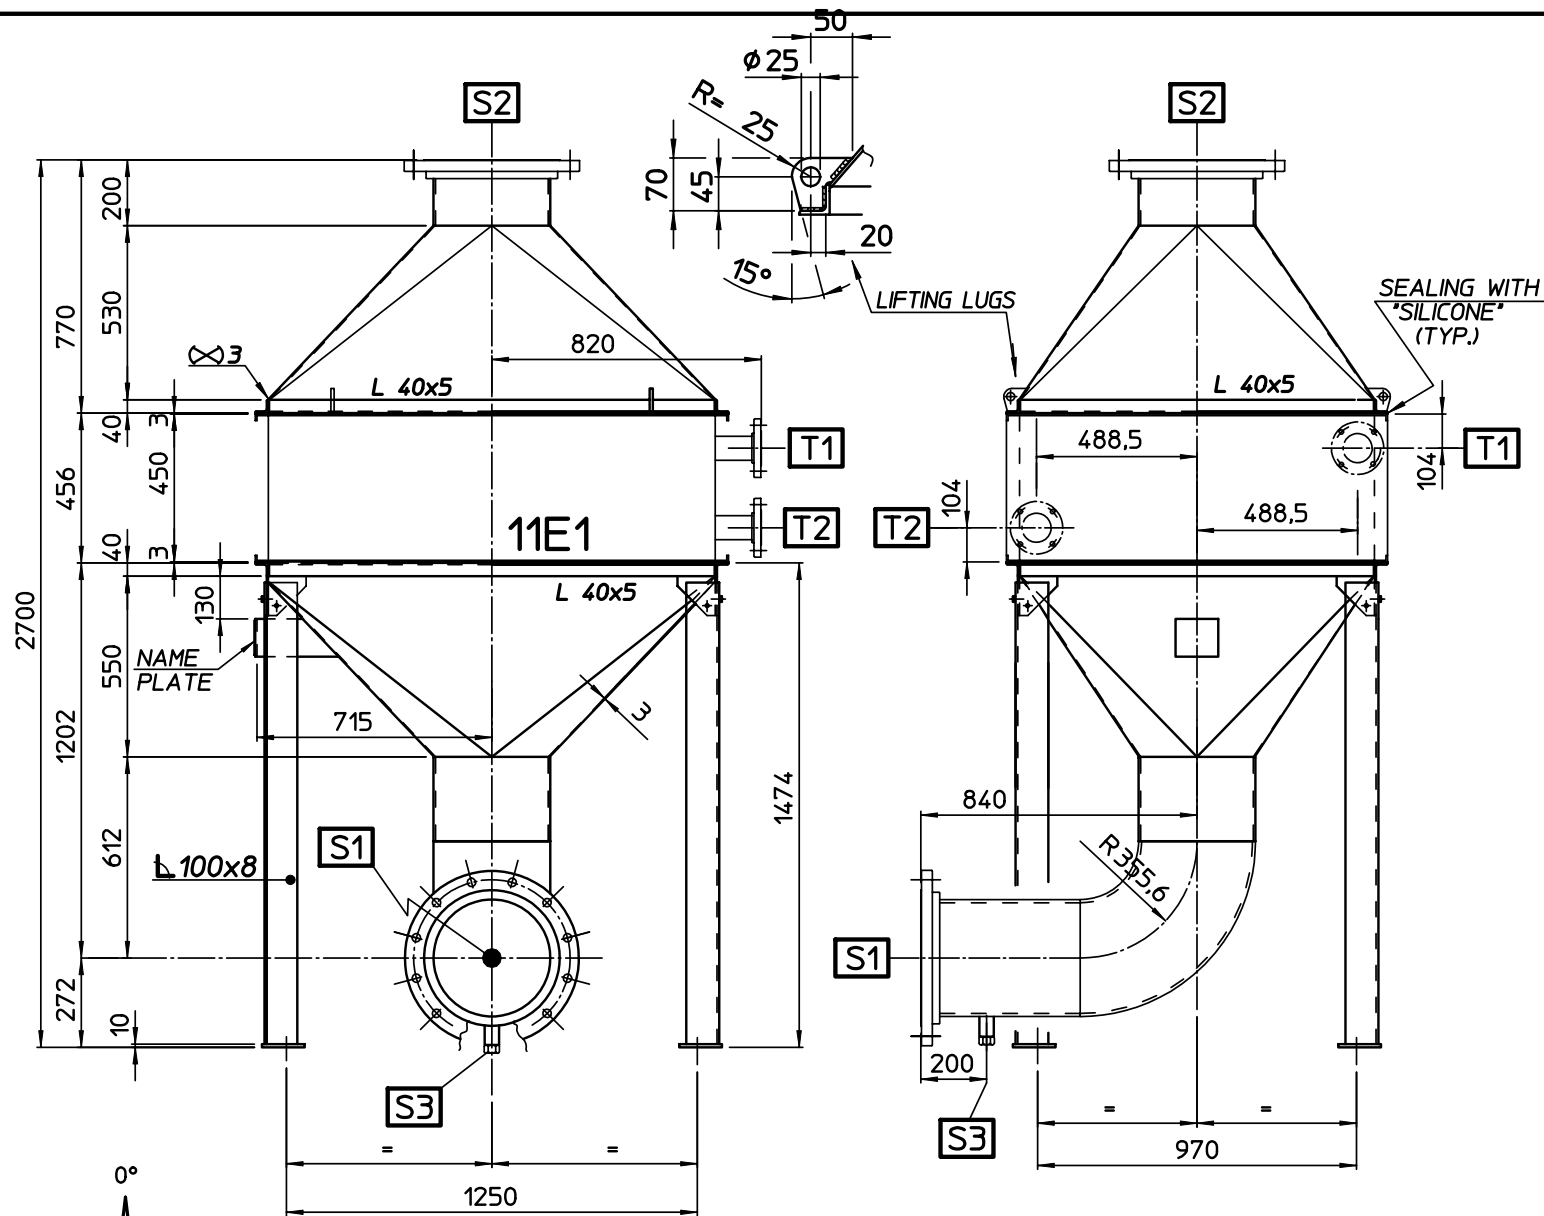


Ci riserviamo la proprietà a termine di legge di questo disegno con divieto di riproduzione anche in parte o di renderlo noto a terzi senza nostra autorizzazione scritta.

We reserve the ownership under the law of this drawing with prohibition of even partial reproduction and to make it known to third persons without our written authorization.

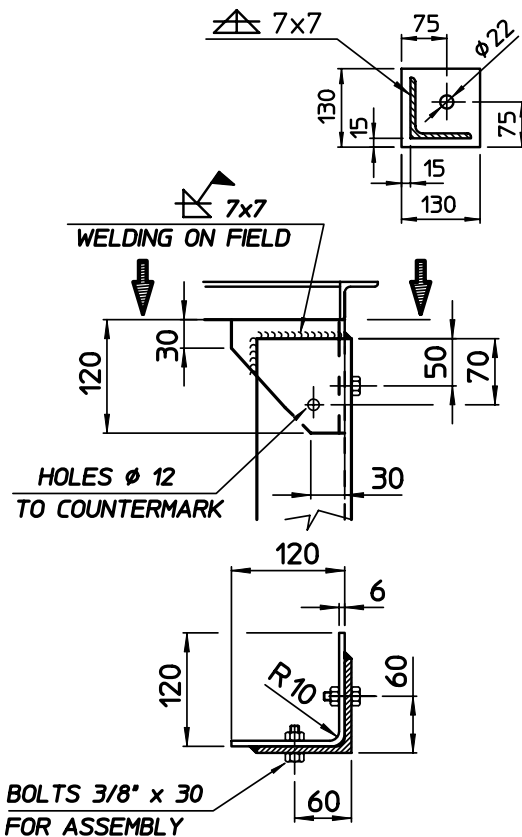

VIEW FROM TOP

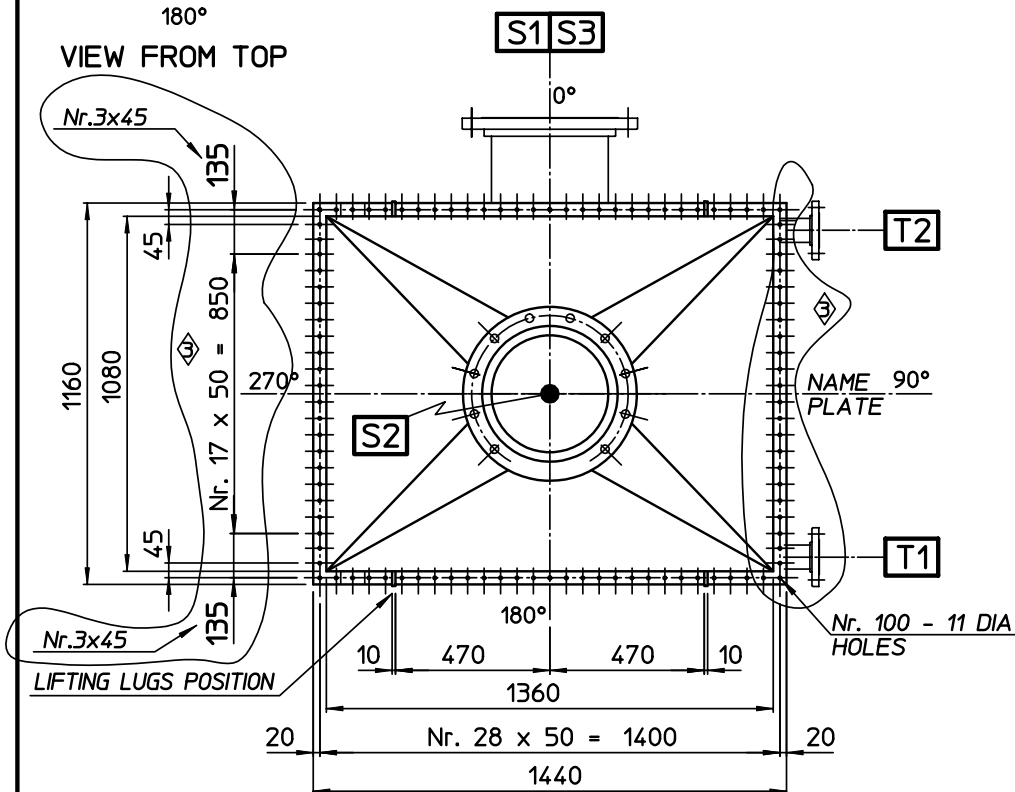

<div></div> <div>desmet ballestra</div>		ITEM 11V1		CUSTOMER				DWG. 1E35 . 35 . 003	
		N°REQUIRED 1		REFRIGERATION EXCHANGERS CONTAINER				FLOW SHEET 1E35 . 10 . 002	
				PLANT SULPHUREX		JOB 1E35		SHEET 1 OF 1	
Rev.	Date	Drawn	Description						
0	17.11.09	G.R.	ISSUED FOR INFORMATION						
1	01.04.10	G.R.	MODIFIED WHERE INDICATED WITH ⬡ - ORIENTATION AND BATTERY TYPE DEFINED						
2	13.04.10	G.R.	MODIFIED WHERE INDICATED WITH ⬢						
3	25.06.10	G.R.	MODIFIED WHERE INDICATED WITH ⬣						
The master version of this document is stored as a digital file in a database - Approval process is digitally managed and no signature is visible on the document.									
NOZZLES						DESIGN DATA		SHELL	BATTERY 11E1
POS	SIZE	RATING	N°	SERVICE	THK.	NOZZLES ORIENTATION	OPERATING PRESSURE Bar (g)	0.035	6
S1	14"	S.O.-R.F. 150#	1	AIR INLET	6,35	AS DWG.	DESIGN PRESSURE Bar (g)	0.09	20
S2	14"	S.O.-R.F. 150#	1	AIR OUTLET	6,35	⬢	HYDROSTATIC TEST PRESSURE Bar (g)	-	30
S3	1"	ANSI B2.1 NPT	1	DRAIN	-	AS DWG.	PNEUMATIC TEST PRESSURE Bar (g)	0.15 WITH AIR	-
							OPERATING TEMPERATURE °C	200	174
							DESIGN TEMPERATURE °C	230	215
							FLUID/SPECIFIC WEIGHT 1,3 Kg/dm3	AIR	VB
							HEAT EXCHANGE SURFACE m2	-	219,7
							HEAT TREATMENT	-	-
							X-RAY TEST	-	-
							PENETRATING LIQUIDS TEST	-	-
							JOINT EFFICIENCY	0,7	-
							CORROSION ALLOWANCE mm	-	-
							GEOMETRIC CAPACITY litri	-	51
							INSPECTION INSTITUTE	CUSTOMER	
							CODE	STD. BALLESTRA	
							WEIGHTS		
							EMPTY 170~ Kg	OPERATING 800~ Kg	
							WITH BATTERIES 500~ Kg		
							STD. DETAILS		ENCLOSED DWG.
T2	2 1/2"	S.O.-R.F. 150#	1	CM OUTLET / WR INLET	-	AS DWG.	NAME PL. HOLDER		SB-PRS-00119/0
T1	2 1/2"	S.O.-R.F. 150#	1	VM INLET / WR OUTLET	-	AS DWG.	NAME PLATE		SB-PRS-00121/0
NAME PLATE POSITION							EXTERNAL PAINTING		SB-ATI-SP002/4
MATERIALS OR EQUIVALENT							INTERNAL PAINTING		INORGANIC ZINC
CONES				A 516 - 60					
FLANGES				A 105					
NOZZLES				A 106 B					
BOLTS				CARBON STEEL					
GASKETS Ø 6 mm ROPE				SOFT PTFE					
SHAPES				A 36					
						INSULATION : 80 mm. (12~ m2)			
NOTE : BATTERY 11E1 * FACO * TYPE : P40.16AR/VA 8R-26T- 1080A-2,5 Pa AISI 304/AL									BALLESTRA'S SUPPLY
⊙ COMPLETE WITH PLUG									
						Comp. Code 2B72-11V1-F1-R4.mi		RIF. D.S.	