




Main interface




CAN interface

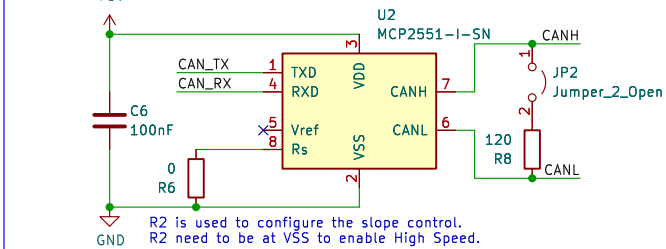


IMU

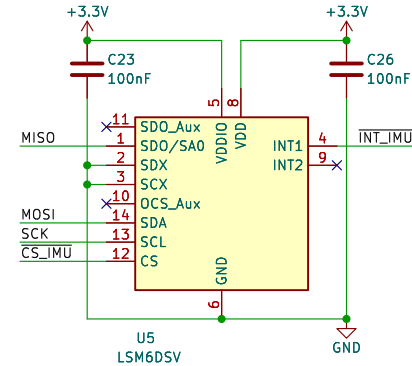


USB

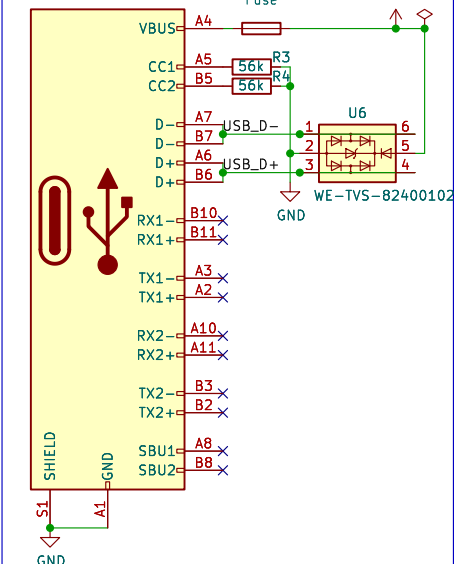


STM32

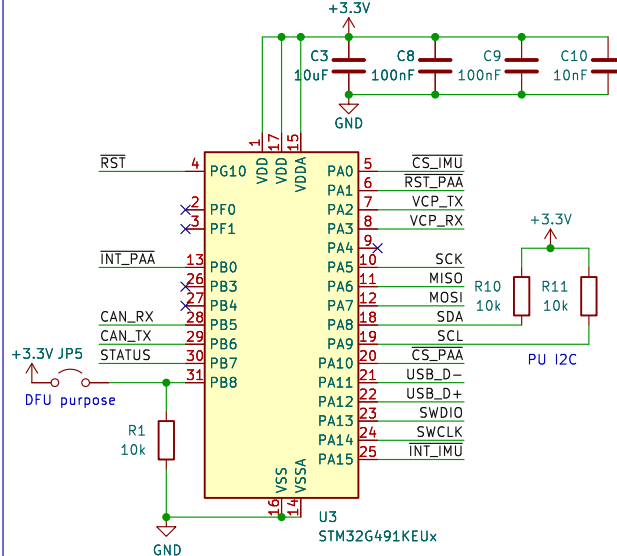


Optical flow sensor

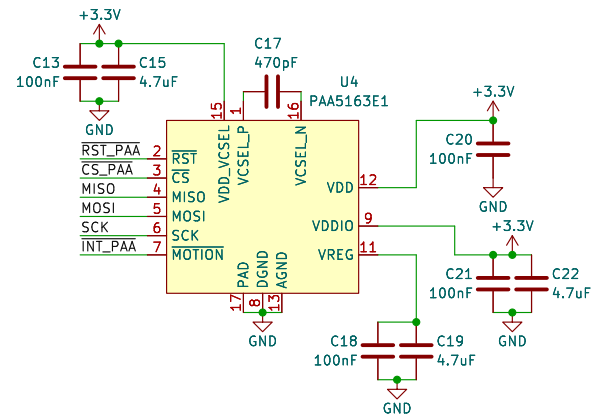

Power input and processing

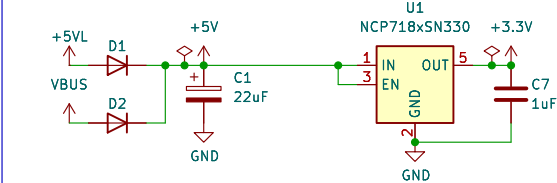

Reset circuit

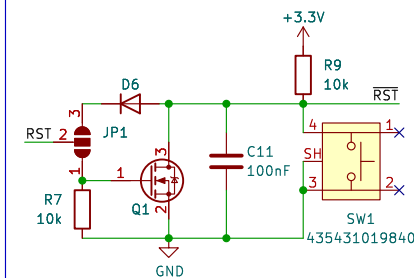


RST can be active low or high (depending on the user). You need to solder JP2 for the wanted configuration.


Marking




Mouting holes



LEDs



J2 Conn_01x08



Evolutek<<

Sheet: Racine
File: movement-tracker.kicad_sch

Title: Movement Tracker

Size: A4
Date: 2026-02-05
KiCad E.D.A. 9.0.7

Rev: V4.1
Id: 1/1

