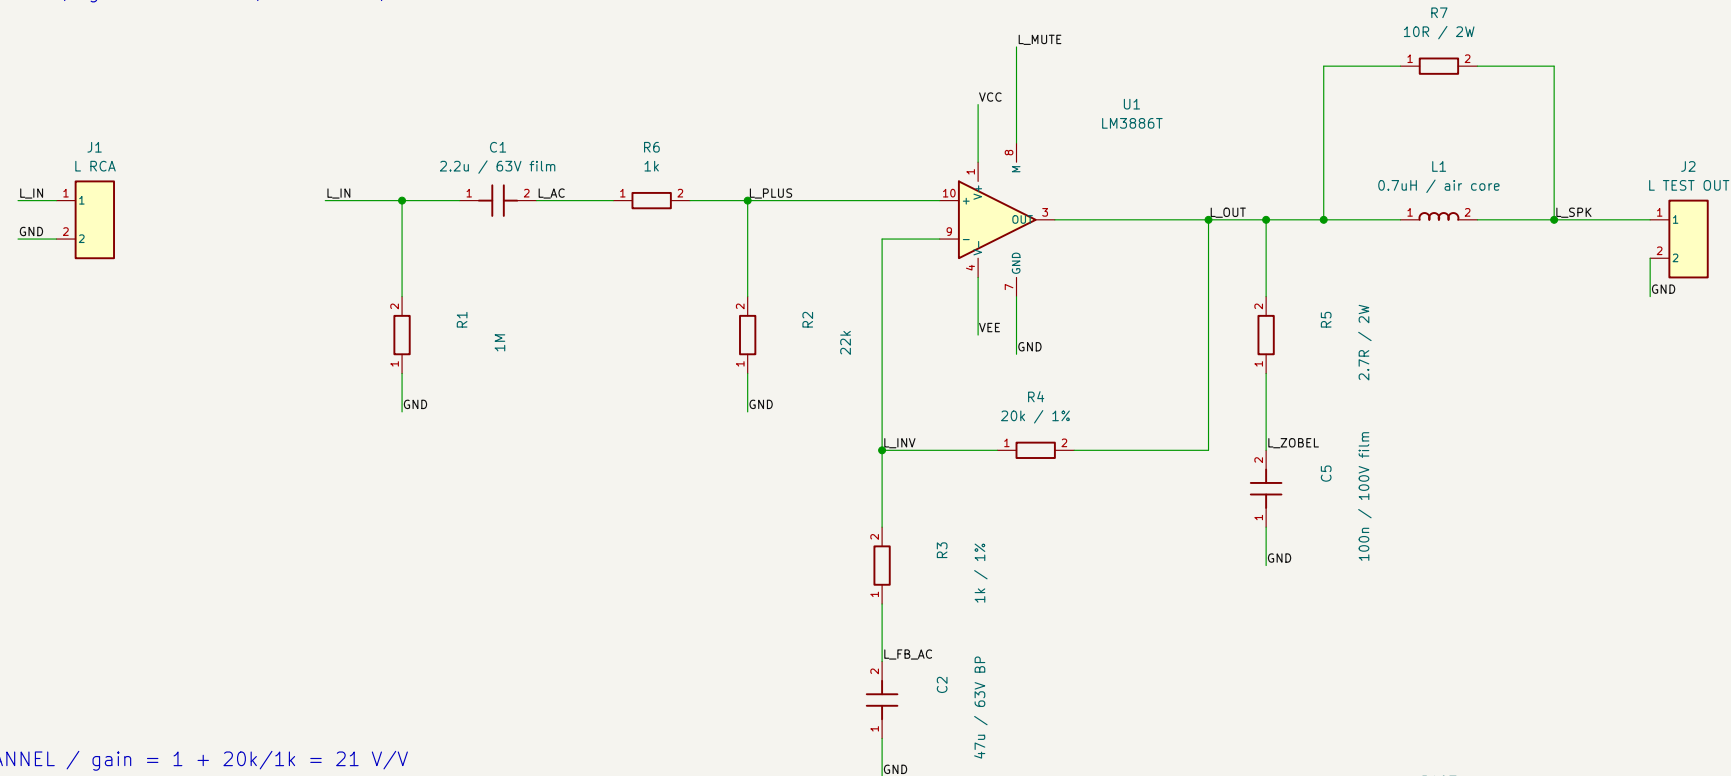
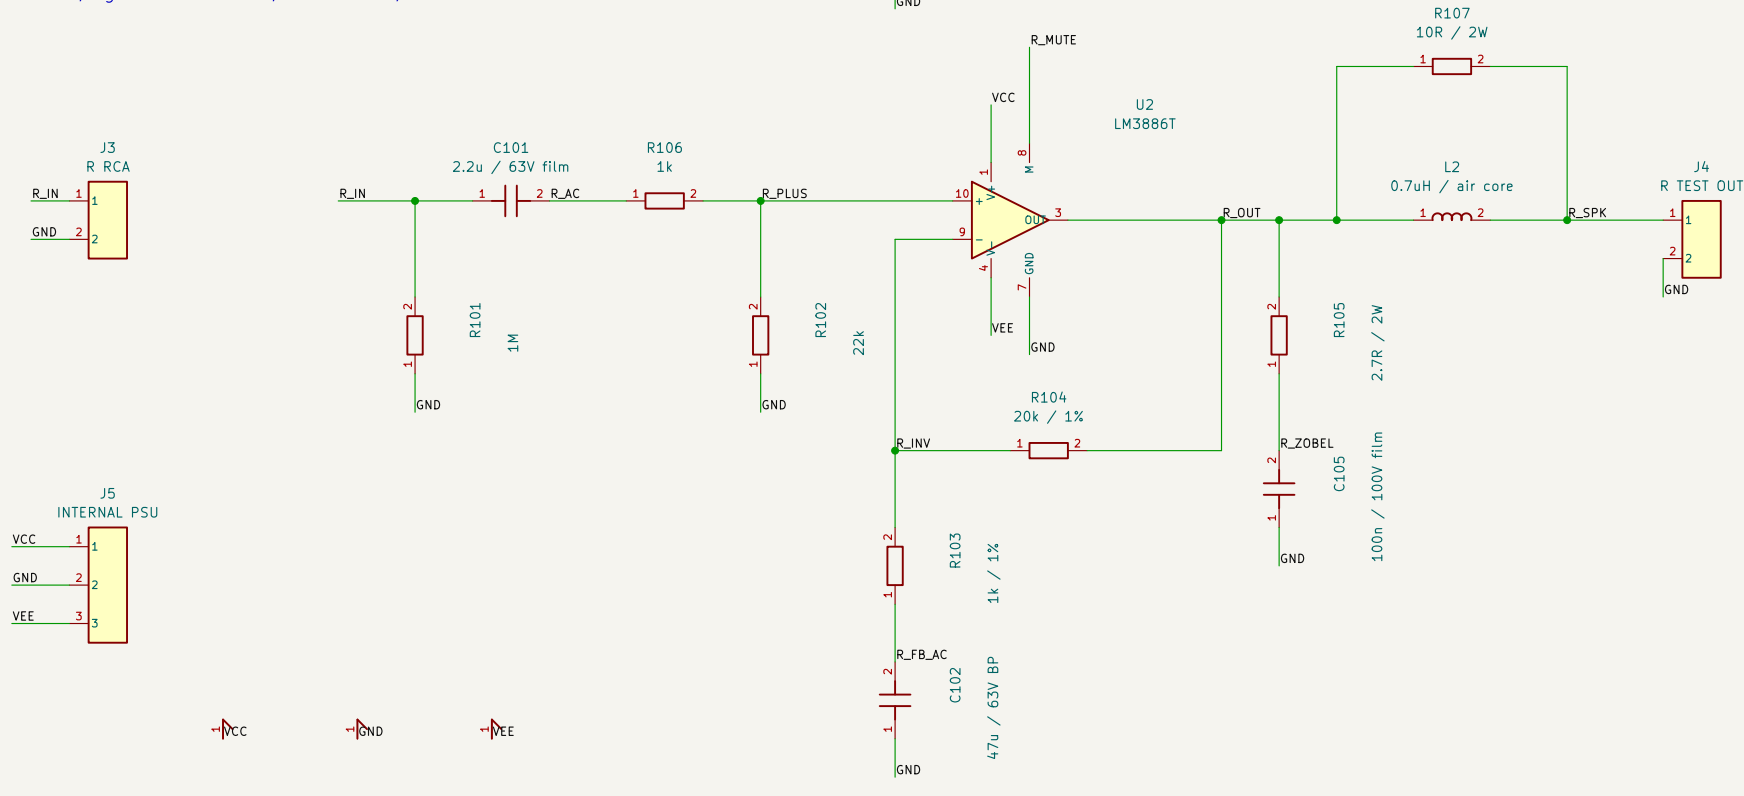


LM3886 / STEREO POWER AMP / EXTERNAL PREAMP / V0.3 / PLAN C

Plan C: stereo / 8 ohms / 2 x 22 VAC supply. Output rating TBD by clipping and thermal tests.

$$L \text{ CHANNEL / gain} = 1 + 20k/1k = 21 \text{ V/V}$$

$$R_{\text{CHANNEL}} / \text{gain} = 1 + 20\text{k}/1\text{k} = 21 \text{ V/V}$$






J5: internal PSU harness. Bench current-limited supply for first amplifier-only tests.

Tab = VEE: insulate from grounded chassis / heatsink.




GND is a net name; route input, feedback and load returns separately.

No mains, fuse or speaker relay circuit in this revision. Pin 5 shares VCC with pin 1; pins 2/6/11 are NC.


L LOCAL DECOUPLING (at IC pins)






MUTE: jumper open = mute; fitted = run.



R LOCAL DECOUPLING (at IC pins)



MUTE: jumper open = mute; fitted = run.



Internal PSU system / no PCB / no hardware measurements

Sheet: /
File: lm3886-v01.kicad_sch

Title: LM3886 stereo AB power amplifier

Size: A3

Date: 2026-09-16

Rev: 0.3 DRAFT

Size: A5	
KiCad E.D.A. 10.0.6	

d: 1/1