






LM3886 / STEREO POWER AMP / EXTERNAL PREAMP / V0.3 / PLAN C

Plan C: stereo / 8 ohms / 2 x 22 VAC supply. Output rating TBD by clipping and thermal tests.




L CHANNEL / gain = 1 + 20k/1k = 21 V/V

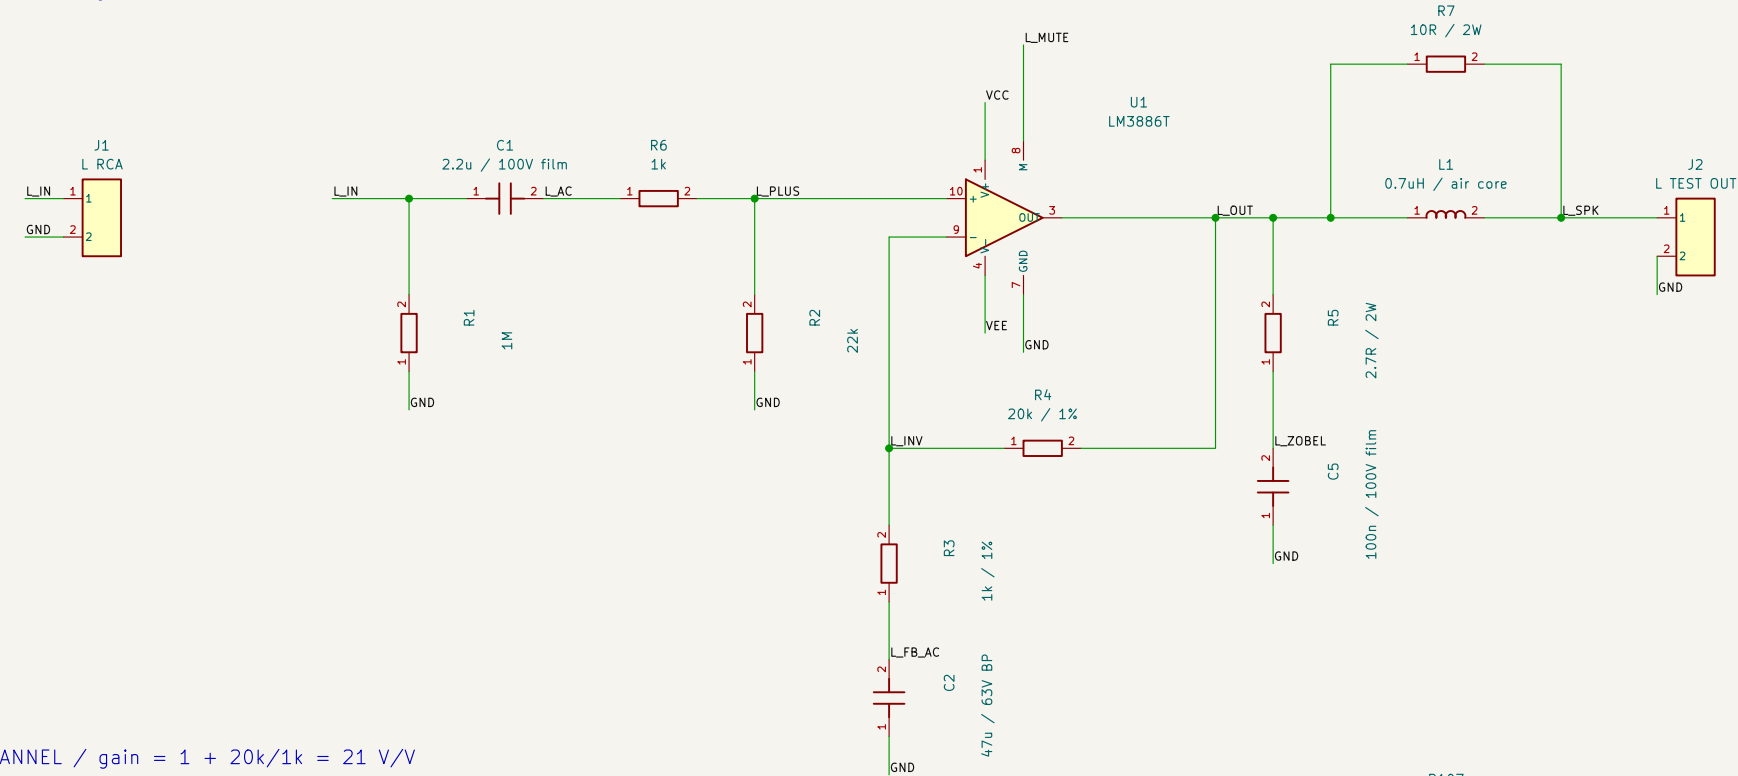


L LOCAL DECOUPLING (at IC pins)







MUTE: jumper open = mute; fitted = run.






R CHANNEL / gain = 1 + 20k/1k = 21 V/V

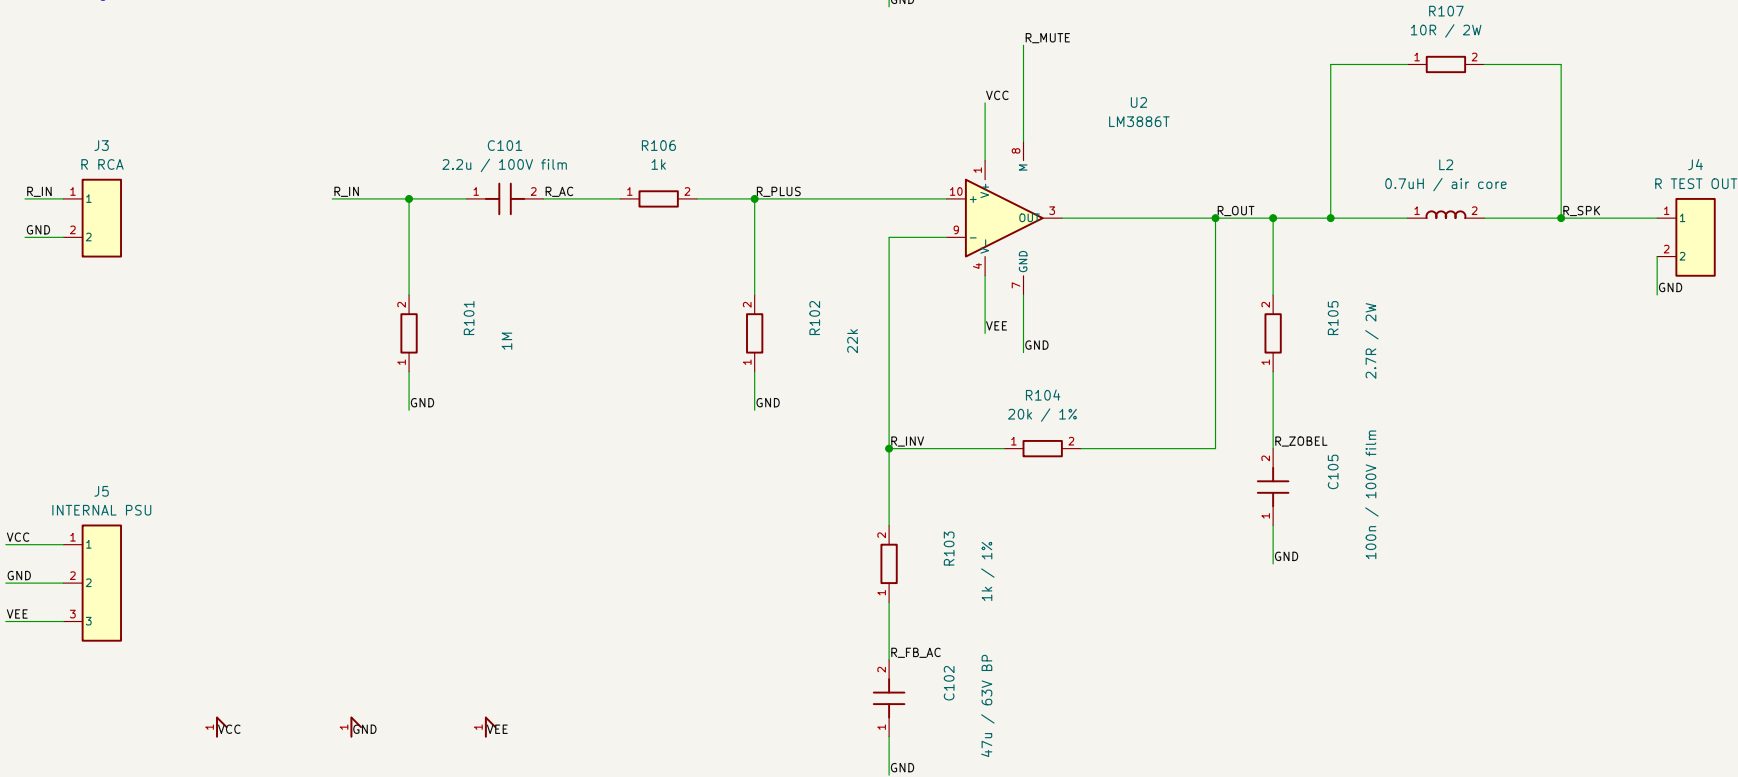

R LOCAL DECOUPLING (at IC pins)



MUTE: jumper open = mute; fitted = run.



J5: internal PSU harness. Bench current-limited supply for first amplifier-only tests.

Tab = VEE: insulate from grounded chassis / heatsink.

GND is a net name; route input, feedback and load returns separately.

No mains, fuse or speaker relay circuit in this revision. Pin 5 shares VCC with pin 1; pins 2/6/11 are NC.

Internal PSU system / PCB V0.3 engineering draft only / no hardware measurements

Sheet: /
File: lm3886-v01.kicad_sch

Title: LM3886 stereo AB power amplifier

Size: A3 Date: 2026-09-22

Rev: 0.3 DRAFT

KiCad E.D.A. 10.0.6

Id: 1/1