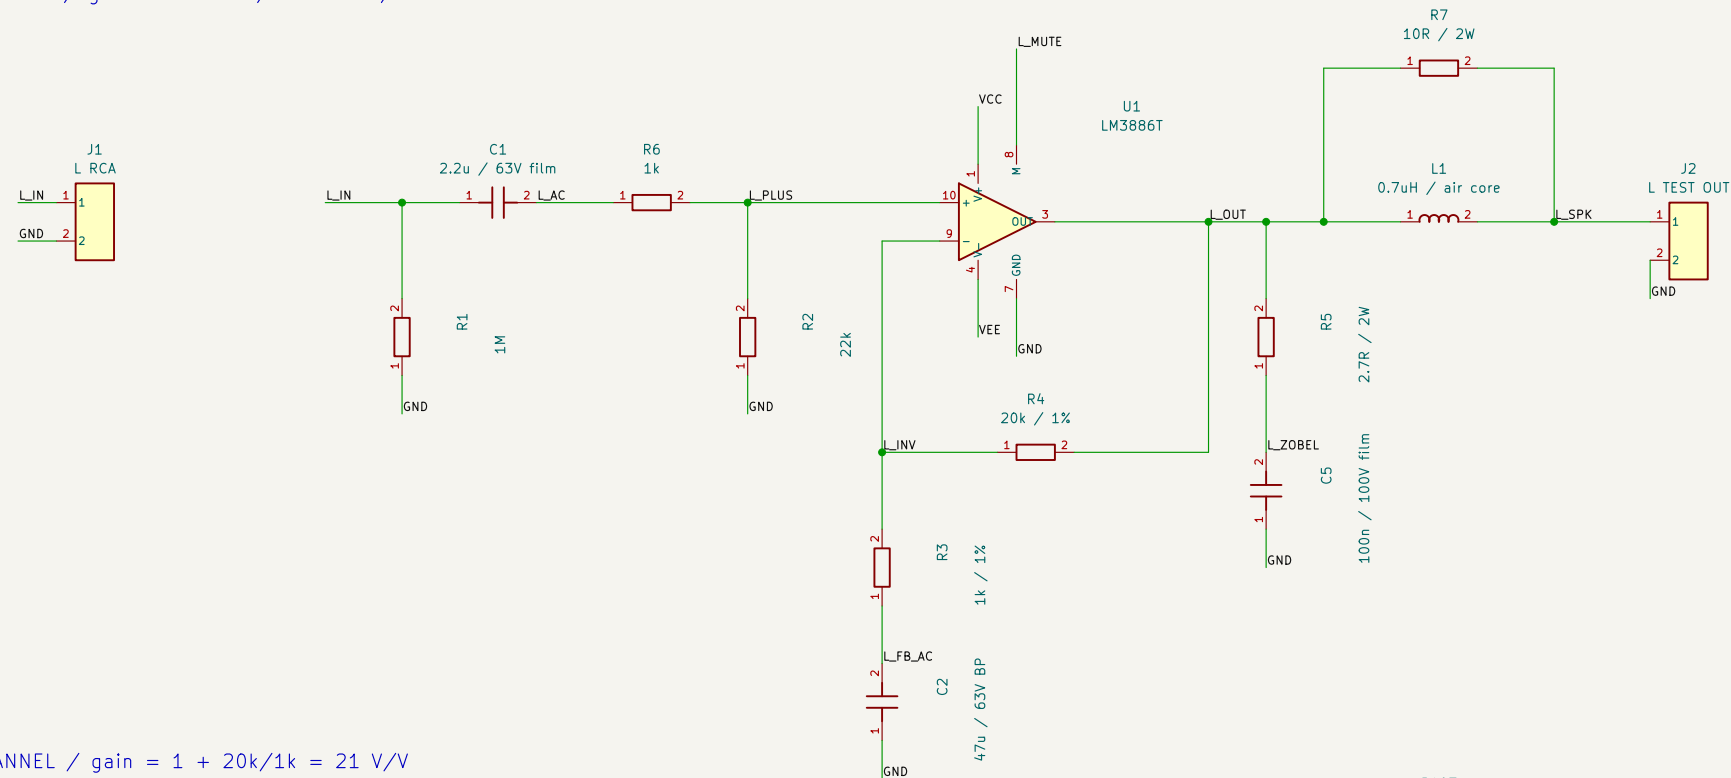
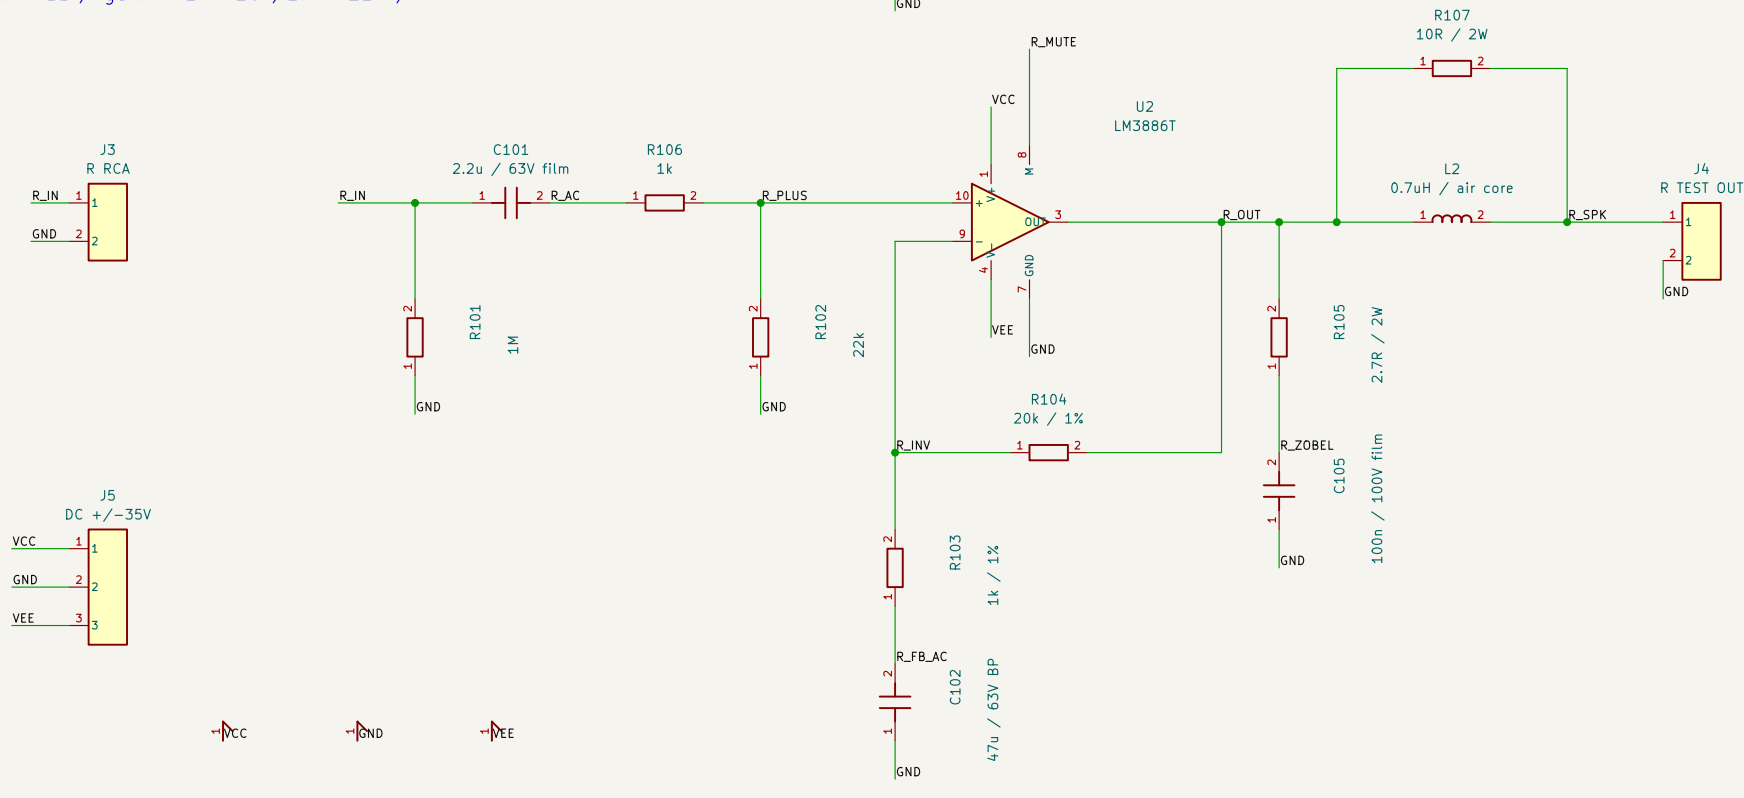


## LM3886 / SIMPLE STEREO CLASS AB / V0.1

Target: 2 x 40 W into 8 ohms, nominal  $\pm 35$  V DC. Draft for review and dummy-load testing.

$$L \text{ CHANNEL / gain} = 1 + 20k/1k = 21 \text{ V/V}$$

$$R_{\text{CHANNEL}} / \text{gain} = 1 + 20\text{k}/1\text{k} = 21 \text{ V/V}$$






POWER INPUT: external tracking, current-limited dual supply.

Tab = VEE: insulate from grounded chassis / heatsink.




GND is a net name; route input, feedback and load returns separately.

No mains, fuse or speaker relay circuit in this revision. Pin 5 shares VCC with pin 1; pins 2/6/11 are NC.




## L LOCAL DECOUPLING (at IC pins)





MUTE: jumper open = mute; fitted = run.



## R LOCAL DECOUPLING (at IC pins)



MUTE: jumper open = mute; fitted = run.



Bench prototype / no PCB / no hardware measurements

Sheet: /  
File: lm3886-v01.kicad\_sch

Title: LM3886 stereo AB power amplifier

Size: A3

Date: 2026-09-11

Rev: 0.1 DRAFT

KiCad E.D.A. 10.0.6

Id: 1/1