

No.

3. prolongation after inrun-renovation

## CERTIFICAT PLASTIC HILL OFCERTIFICAT POUR TREMPLIN EN PLASTIQUE ZERTIFIKAT FÜR MATTEN-SCHANZEN

Date of issue

30.12.2014

Valid till

Établi le

Ausgestellt am

Valable jusq' au

Gültig bis

Place: HS =

Villach 98

Name:

**HS 98** 

31.12.2019

h/n =

0.570

Year of covering Verlegungsjahr<sup>\*</sup>

1995

**Mat-element dimensions** 

Mattenelement Größe

Manner of fastening plastic hooks

100 x 52 cm

**Befestigungsart** 

Mat overlap of the seam

20 - 30 cm

Material

polypropylen

Uberdeckungslänge des Mattenbundes

Sub construction / Unterkonstruktion concrete / dampmats / net

Material of inrun track / Spurmaterial ceramic


Distance between both center of tracks / Abstand der beiden Spur-Mittelachs: 29,5 cm

Width of track / Spurbreite

14,0cm

Depth of track / Spurtiefe

2,0 cm

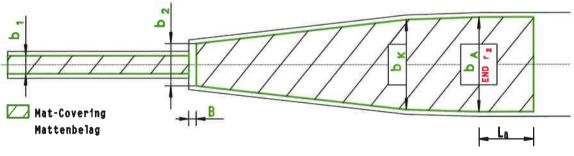

**b1** 2.55m

**b2** 7.50m

**bK** 14,80m

16.50m bA

**La** 15.00m

**B** 15,70m

## Remarks / Bemerkungen

- inspection by Marko Mlakar (14th July 2014) 1.
- remarks of inspection-report from 14th July 2014 must be observed 2.
- soft mats between table and knoll "B" must placed during training and competition
- in outrun closed guard-rails must be fixed in accordance to IWO 411.5.2 during competition and training, net is not permissible between infield and visitors area.

JUMPING HILL APPROVED BY THE FIS TREMPLIN HOMOLOGUE PAR LA FIS DURCH DIE FIS GENEHMIGTE SPRUNGSCHANZE

SUB-COMMITTEE FOR JUMPING HILLS

**CHAIRMAN:** 

Hans-Martin Renn