

EGCM

LEEDS EAST

08 NOV 24

19-1

LEEDS EAST


UNITED KINGDOM

BRIEFING STRIP

LOCATION Elev 29' /9m N53 50.1 W001 11.7	FIS LONDON INFORMATION 125.475	AIRSPACE SHERBURN RADIO 122.610 ⁽¹⁾
---	--	--

AIR/GROUND
FENTON RADIO **120.710** (en)

⁽¹⁾ Sherburn-In-Elmet ATZ

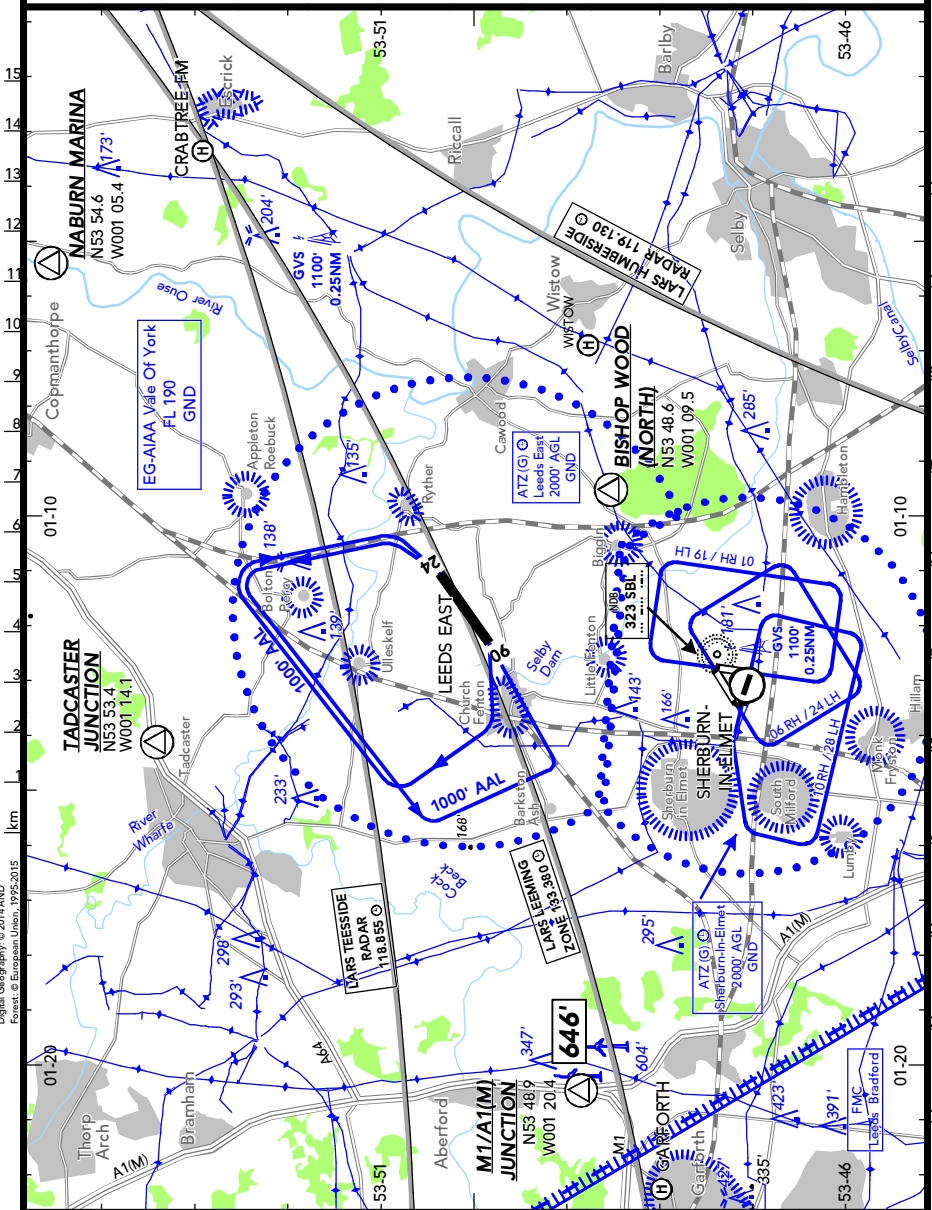

BRIEFING STRIP™

LOCATION


Elev 29' /9m
N53 50.1 W001 11.7

AIR/GROUND

FENTON RADIO 120.710 (en)

ADMITTED AIRCRAFT



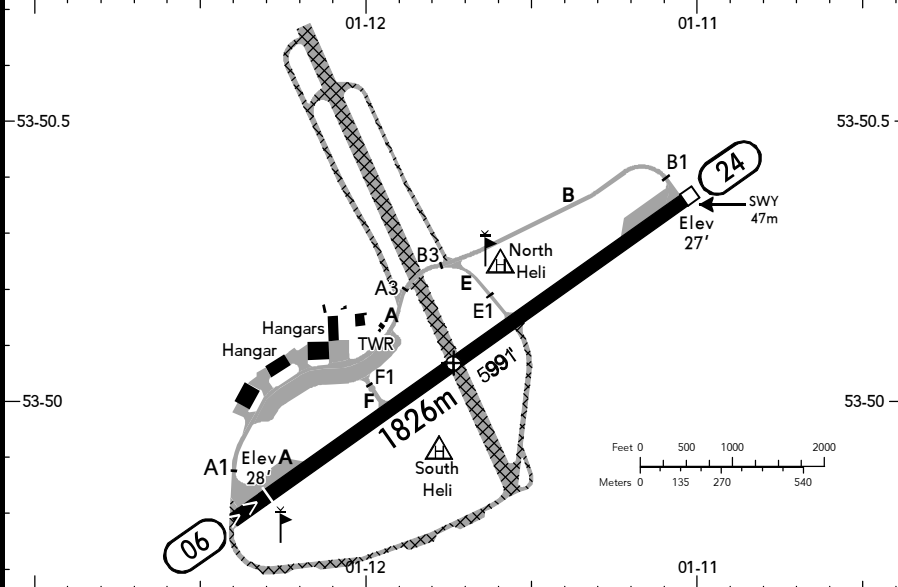

ALS - PAPI 06 (3.0°), 24 (3.0°) - THRL - RL - RENL - TWYL - APRON - WDI - OBSTL.

RWY No	Dimension (m) - Surface	TORA (m)	LDA (m)	Strength	Lights
06 (055°)	1826 x 45 Asphalt	1799	1711	PCN 30/F/C/X/U	
24 (235°)		1711			

Intersection TKOF

RWY	PSN	TORA (m)
06	F1	1184
	CLSD RWY 16/34	921
	CLSD RWY 16/34	810
24	CLSD RWY 16/34	810

CAUTION: Reduced wing-tip clearance between taxiing and parked ACFT on Main Apron.

WARNING: The only signals are light signals.

Pilots are to join and depart via AD VRPs, joining the visual circuit from the crosswind, downwind, base or finals. No deadside or overhead joins due to the conjoined ATZ with Sherburn in Elmet AD to the south.

At both ends of RWY 06/24, the pavement width is wider than the delineated RWY width.

General

NORDO prohibited.

Aerobatic manoeuvres and low flypasts are prohibited unless prior approval has been given by AD OPR.

HEL Operations

In order to avoid noise sensitive areas surrounding AD, HEL should conform to the normal HEL circuit PROCs.

700' AAL circuit on ARR and DEP.

HEL should conform to a HEL circuit of 700' AAL, RWY 24 LH and RWY 06 RH.

HEL should arrive via the official reporting points and position to Heli North or Heli South avoiding Sherburn Airfield ATZ and fix wing circuit.

Pilots should communicate intentions taxing to and from the HEL reporting points.

Traffic Circuit

ACFT taking off, 'going around' or making TGL may be subject to noise PROC as instructed by TWR.

Circuit direction: RWY 24 RH; RWY 06 LH.

Fixed wing circuit height 1000' AAL.

HEL circuit 700' AAL.

RWY 06 - Circuit pattern

TKOF

Turn left as soon as practicable to do so and estbl on track to clear the village of Ryther (060°, 2 NM). If remaining in the circuit, ensure that crosswind and downwind track is to the N of the villages Bolton Percy and Appleton Roebuck. It is acceptable to maintain a track between the two villages following the railway line.

CHANGES: Text.

© JEPPESEN, 2017, 2024: ALL RIGHTS RESERVED

LDG

Maintain the downwind leg N of the villages Bolton Percy, Appleton Roebuck and Ulleskelf to avoid overflying. No low APP over the village of Church Fenton. Remain N of the railway line.

Runway 24 - Circuit pattern**TKOF**

Turn right as soon as practicable to do so and estbl a westerly track to avoid overflying the village of Church Fenton. If remaining in the circuit ensure that the crosswind and downwind track is to the N of the villages Ulleskelf, Bolton Percy and Appleton Roebuck. Remain N of the railway line. It is acceptable to turn on base leg between the two villages following the railway line S bound (performance permitting).

LDG

Ensure base leg remains clear of the villages Bolton Percy and Appleton Roebuck and if performance permits off set final APP to avoid the village of Ryther. Offset APP does not apply to AFCT on the RNP approach.

VFR Flights

The ARR procedure will be via VFR reporting points not below 1500' AAL.

VFR departures will follow noise abatement then climb on track avoiding inbound VRP's.

All DEP and ARR ACFT should avoid overflying villages on the downwind leg.