

EGSC
CAMBRIDGE


11 OCT 24 (19-1)

CAMBRIDGE
UNITED KINGDOM

BRIEFING STRIP™

LOCATION Elev 48' /15m N52 12.3 E000 10.5		FIS LONDON INFORMATION 124.600	LARS MARHAM ZONE 124.155
ATIS ATIS 134.605	FMC SQUAWK 7013⁽²⁾ STANSTED RADAR 120.625⁽²⁾		APPROACH CAMBRIDGE APPROACH 120.965⁽¹⁾ (en)
TOWER CAMBRIDGE TOWER 125.905			

⁽¹⁾ VDF ⁽²⁾ London Stansted FMC Area

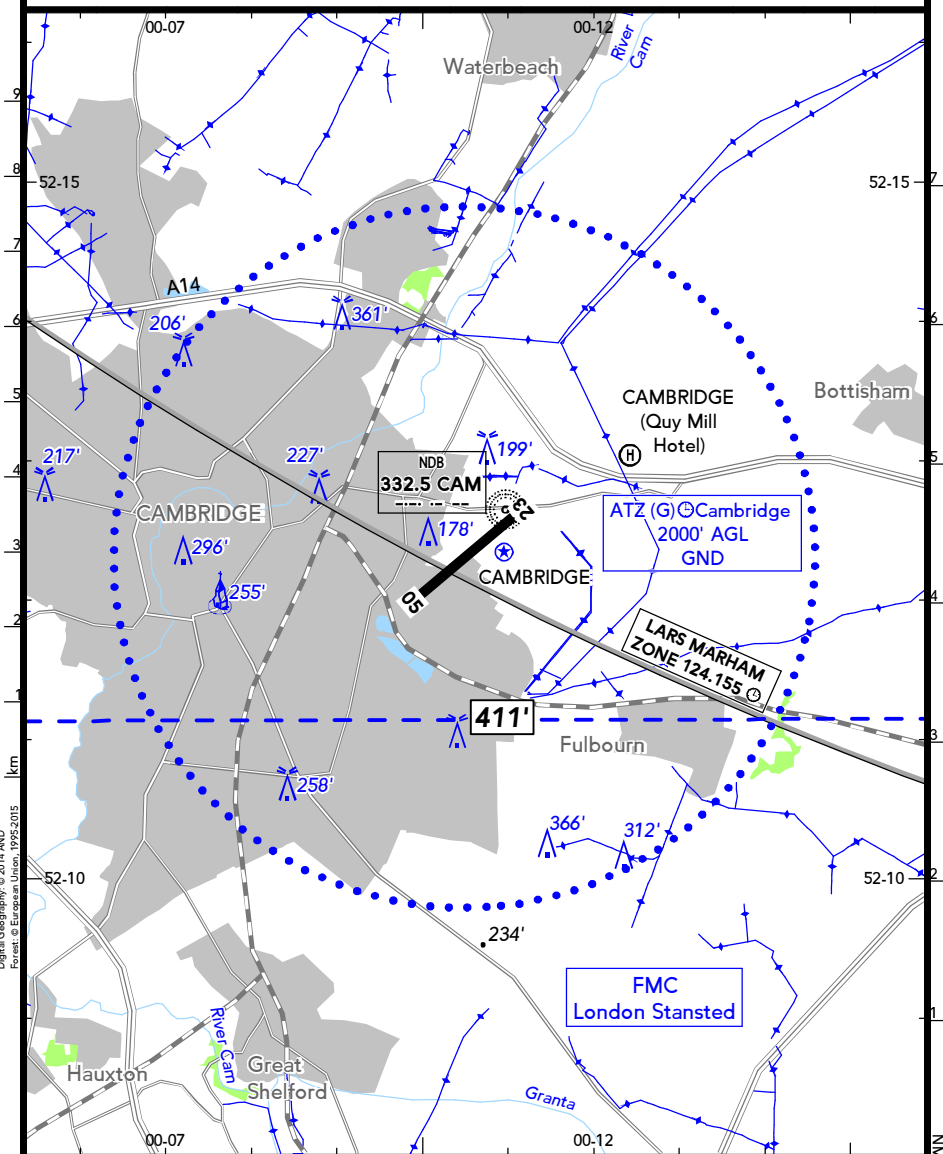

BRIEFING STRIP

LOCATION

Elev 48' /15m
N52 12.3 E000 10.5

ATIS


ATIS 134.605

TOWER

CAMBRIDGE TOWER 125.905

ADMITTED AIRCRAFT



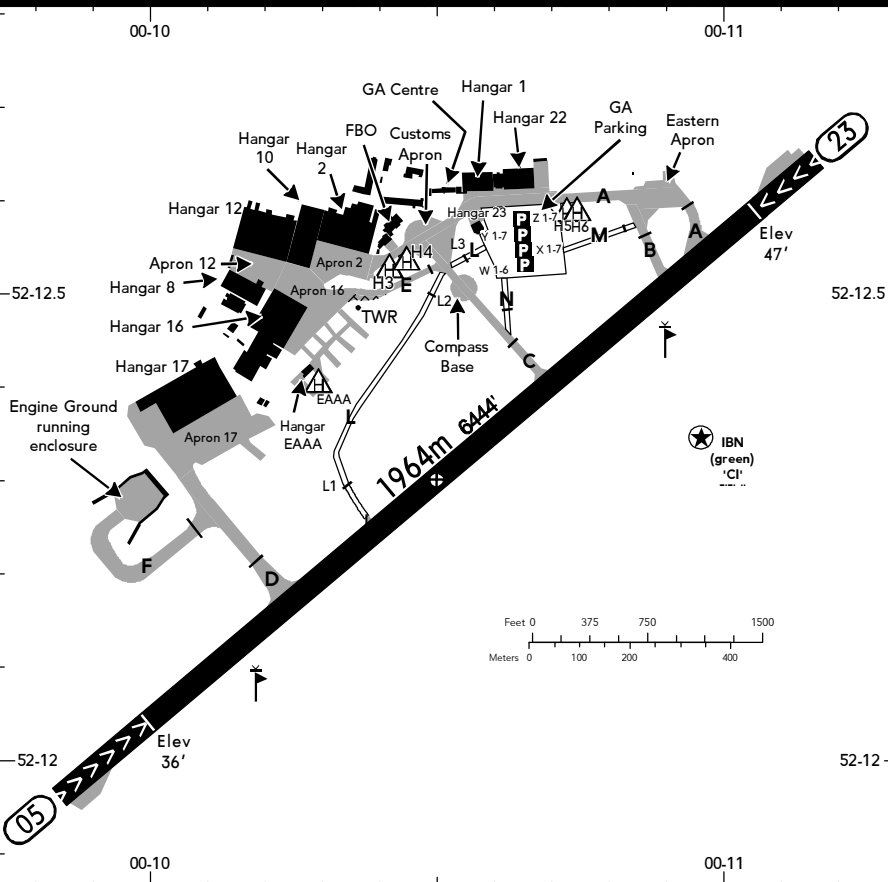

00-10

00-11

52-12.5

52-12

00-10

00-11

Feet 0 375 750 1500

Meters 0 100 200 400

IBN - ALS - PAPI 05 (3.0°), 23 (3.0°) - THRL - RL - RENL - TWYL - WDI - OBSTL.

RWY No	Dimension (m) - Surface	TORA (m)	LDA (m)	Strength	Lights
05 (049°)	1964 x 45 Asphalt	1843	1628	PCN 50/F/C/W/T	
23 (229°)		1886	1742		

1 RWY grooved.

WARNING: Aerial activity takes place outside of AD published hours.
Hangar 23 blocks a large section of TWY A from the direct sight of ATC.
RWY 05 - possible turbulence in touch-down area.
TWY A - please be aware of taxiing speeds, uncontrolled pedestrian crossings cross this TWY.
Grass TWY N on the right after holding position C obscured by holding position sign, follow lead-off line.
Possible glare from car park to the right of RWY 23 approach.

Intersection TKOF

RWY	TWY	TORA (m)
05	D	1255
	C	580
23	A	1624
	B	1519
	C	1202

Airport Regulations

NORDO ACFT prohibited.

CHANGES: TWYs - HEL Alighting Area - Apron - Parking Stands - Buildings - Holding Position.

© JEPPESEN, 2021, 2024: ALL RIGHTS RESERVED

EGSC

 JEPPESSEN

CAMBRIDGE

19 JUL 24

19-3

CAMBRIDGE
UNITED KINGDOM

It is a mandatory requirement that all aircrew and ground staff wear high-visibility clothing (minimum standard being a high visibility waistcoat) fastened at all times in external airside areas of the AD.

Pedestrians must use the defined pedestrian walkways when transiting to and from ACFT.

It is the responsibility of the ACFT captain to ensure that their passengers are escorted by aircrew or ground staff at all times when on foot in external airside areas of the AD.

Flight testing activity frequently undertaken at AD.

Testing may take place at short notice and some disruption can be expected.

No smoking airside.

Use of Runways

Asphalt RWY 23 - in the event of a go-around, conduct the go-around over the main RWY avoiding flying over the dead side.

Ground Movement

Light ACFT will be directed to the grass parking area in front of Hangar: Parking is on a grid of four rows marked W, X, Y, Z and numbered 1-8 from west to east. All ACFT will be marshalled except Light ACFT on grass parking areas and based operators, unless advised otherwise by ATS.

When taxiing on the grass, keep to cut grass TWYs. The long grass areas are not inspected and are unfit for manoeuvring.

Noise Abatement Procedure

Avoid flying below 2000' within 3 NM of Cambridge City, EXC when taking-off or landing at the AD.

The visual circuit height for fixed-wing ACFT is 1000' AAL and 1500' AAL for multi-engine ACFT unless otherwise instructed by ATC. RWY 05 RH traffic circuit.

ACFT approaching asphalt RWY 05/23 without assistance from Radar (or ILS RWY 23) shall follow a descent path from at least 1000' that is no lower than the normal approach path indicated by the PAPI.

HEL Operations

Routing to the AD should avoid overflight of, or passing in close proximity to Cambridge city and surrounding villages.

Daily Helimed Operations take place outside of AD op hr.

Radio Communication Failure

All VFR ACFT experiencing radio fail to conduct a go around along the centreline of the duty RWY and follow any light signals received from the tower. Avoid flying over the dead-side of the RWY.