



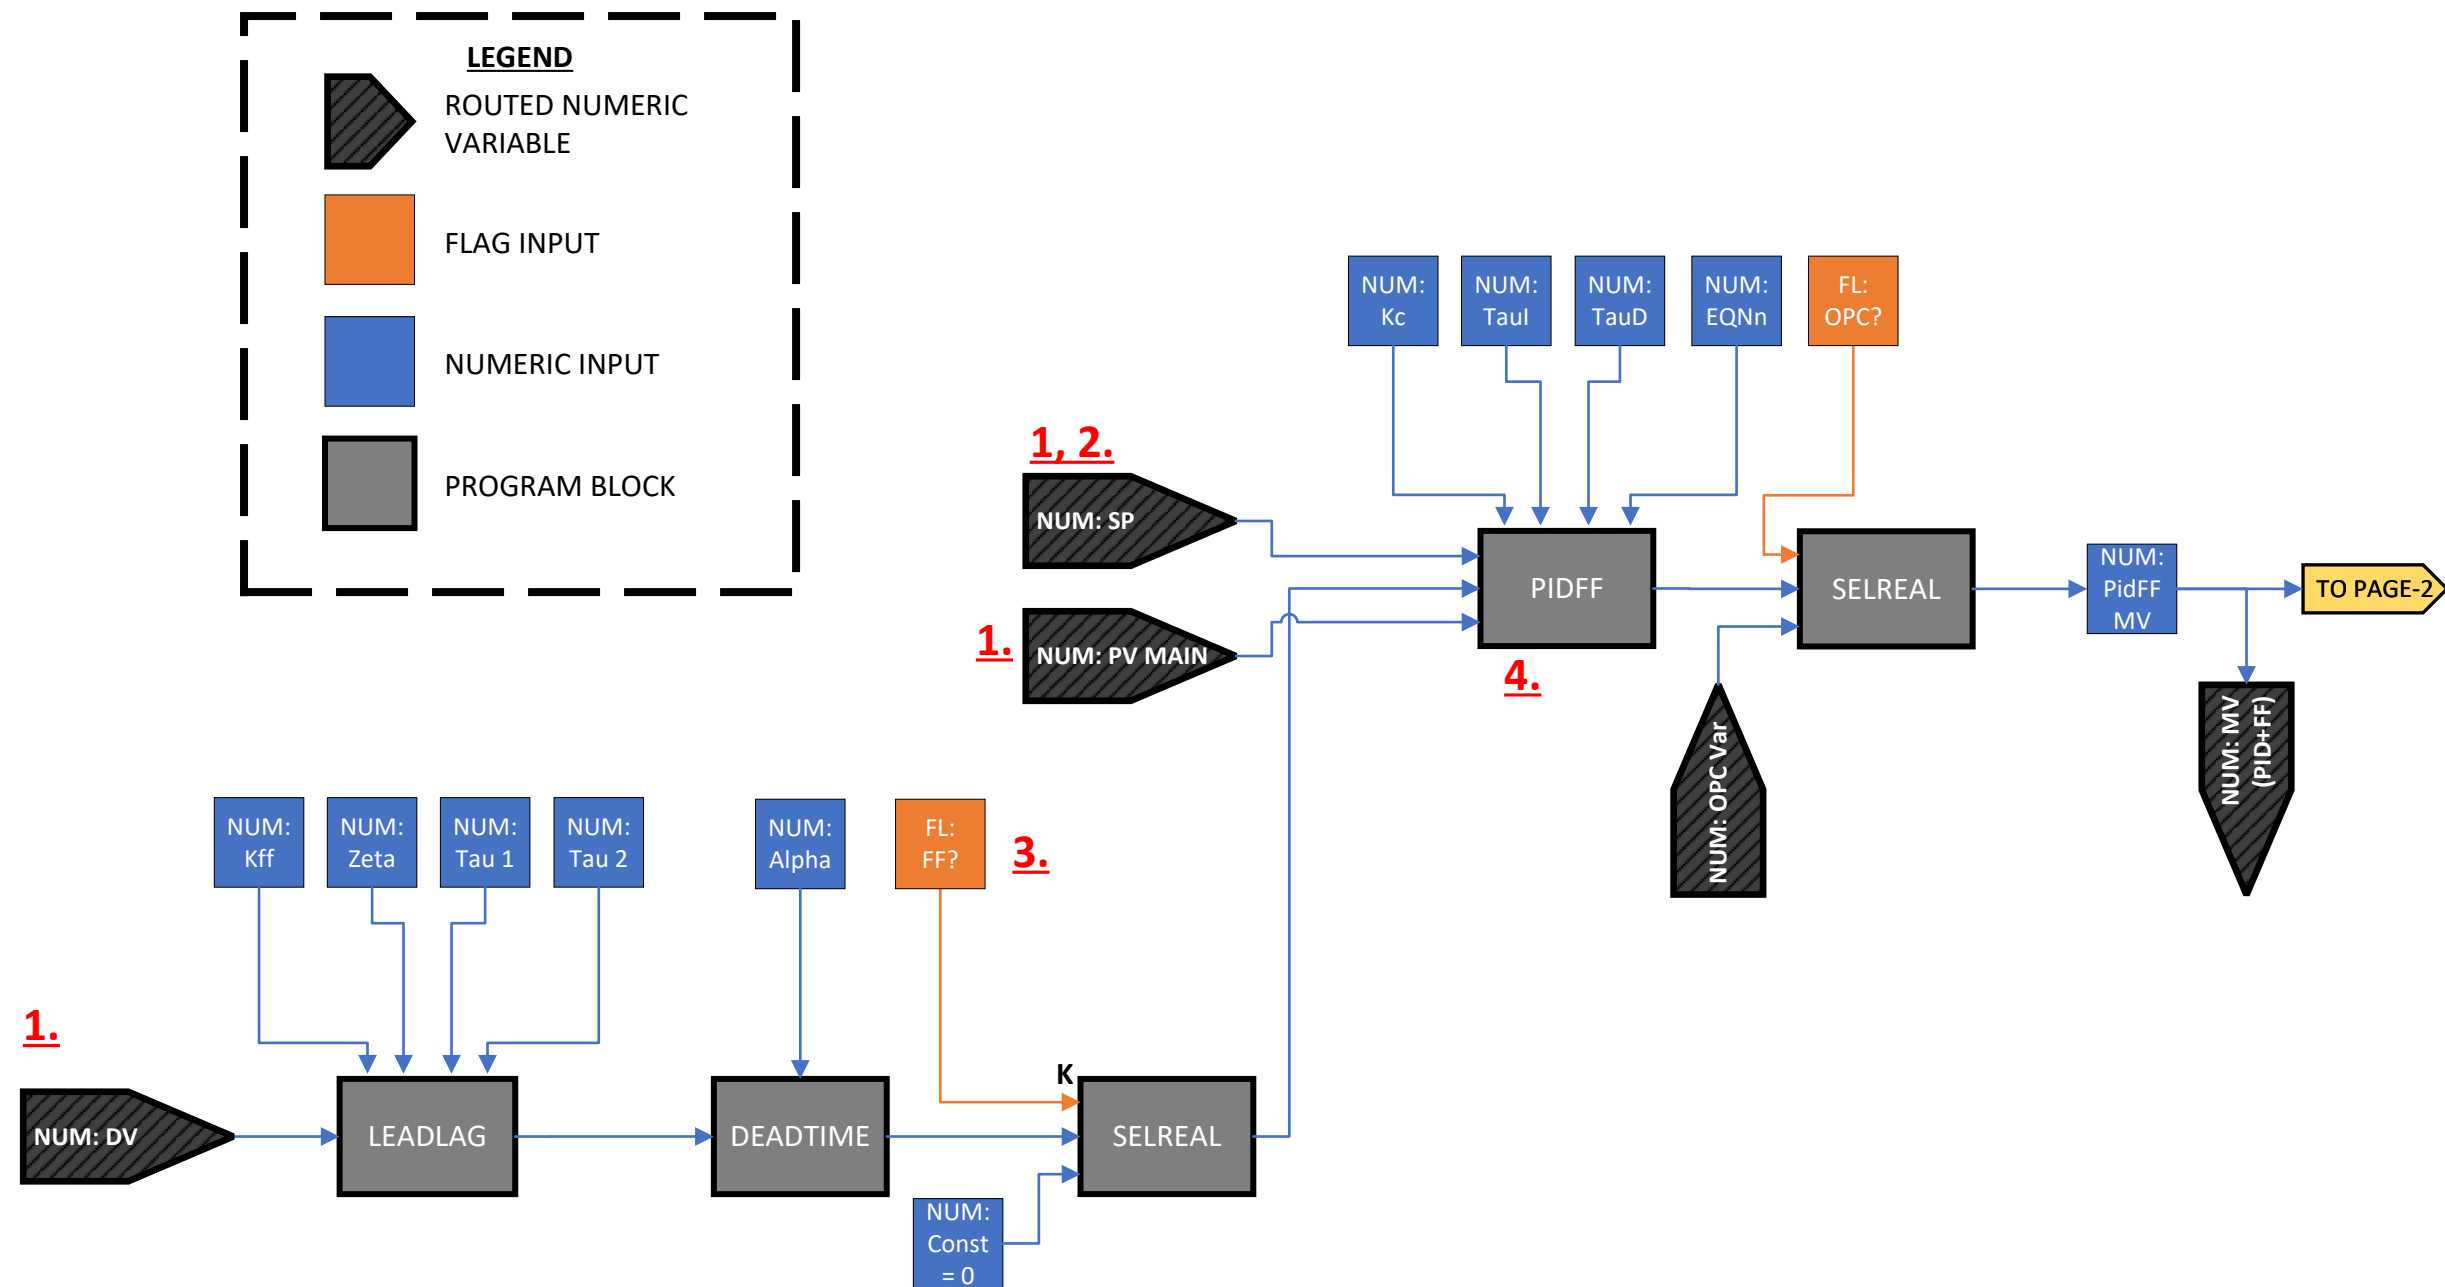

- 1) These values are routed from PID_PvSp_ARRAY-R0A CM
- 2) SP routed directly from Experion Station
- 3) If FF flag true, send FF arm to PIDFF, else send constant 0.
- 4) Additional parameter control in actual CM.

Page 1

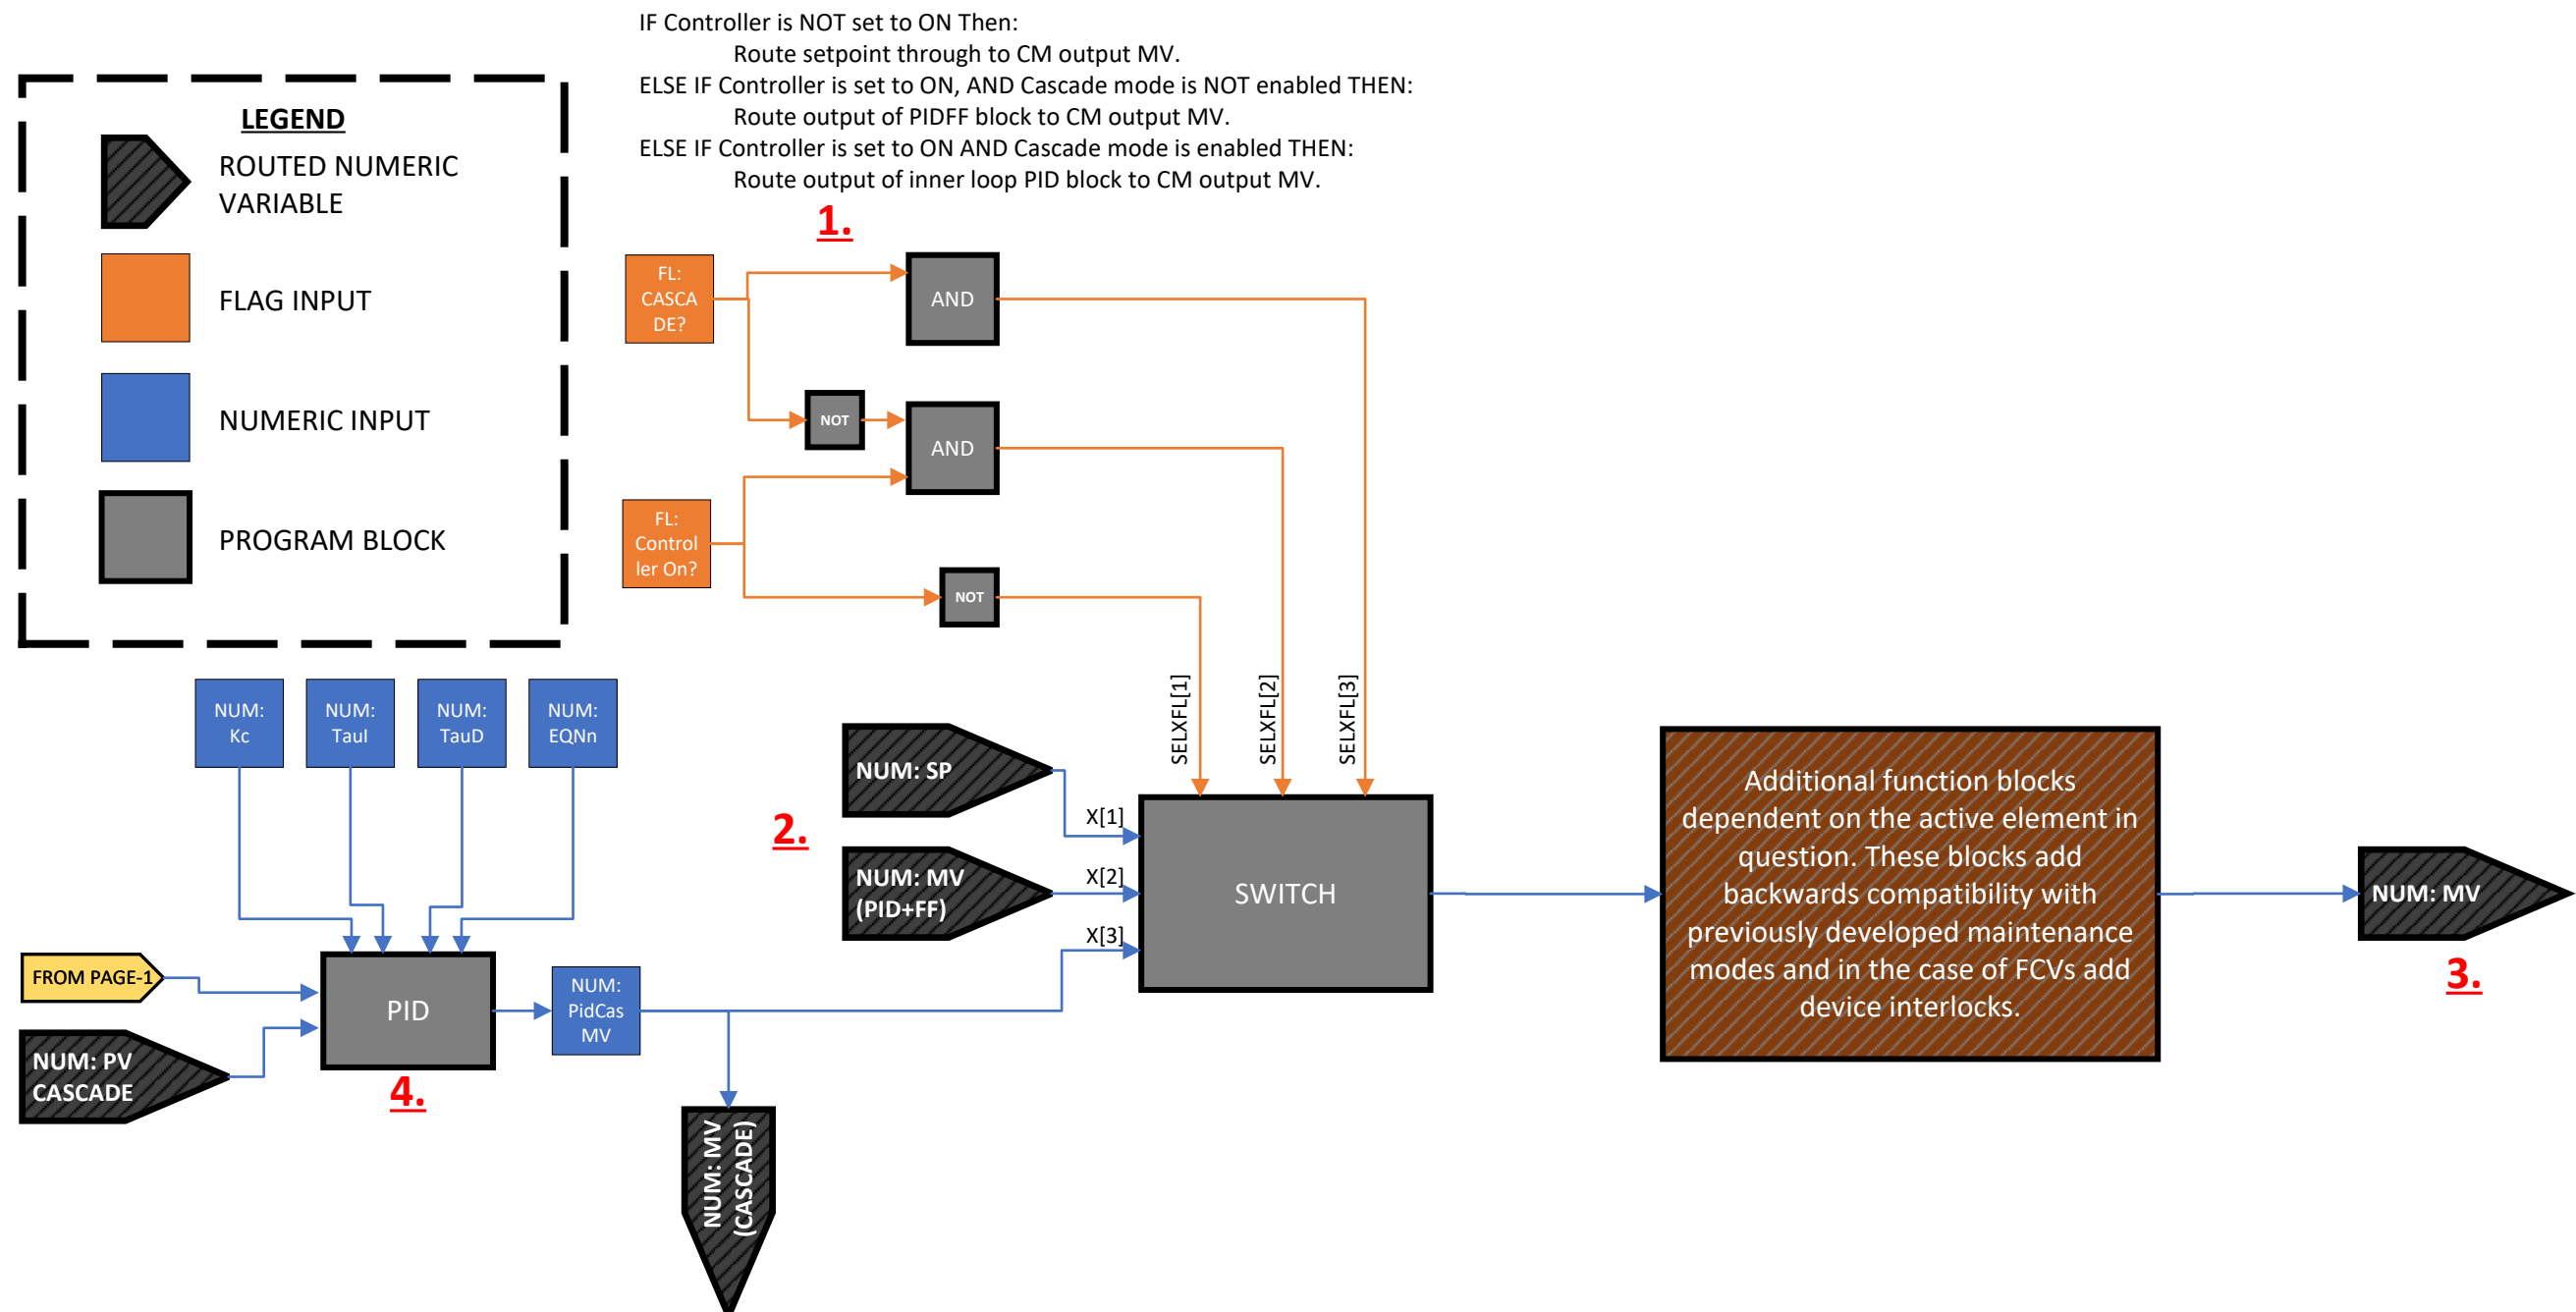

- 1) Additional logic present in actual CM.
- 2) Routed from Page 1.
- 3) FIXED OUTPUT MV: Do this so no overwriting of MVs can occur.
- 4) Additional parameter control in actual CM.

<i>Revision 0A 18-07-2022</i>
<i>Revision 0B 25-07-2022</i>
<i>Revision 0C 29-07-2022</i>
<i>Revision 0 06-12-2022</i>
Page 2