

EXPERT

SAFETY SOLUTIONS

**EMERGENCY LIGHTING
SAFETY SIGNS SOLUTIONS.**



**Expert Safety Solutions
Vadodara, Gujarat.**

Mo. 8460 699 569
www.expertsafety.in
expertsafety@expertssolutions.com

GLOMAKE Signs are manufactured from best photoluminescent materials and to the latest international standards, ensuring its use for years to come. We product our photoluminescent sings in a wide range of material and have detailed properties and uses below.

PHOTOLUMINESCENT

For use where there is a risk of other light source failing. These signs will glow intensely during sudden darkness. They are available in the following material :

Flexyle Sheet (F)

Flexyle is a self - adhesive flexible sheet which can be fixed on any surface which is used for fixing on fire extinguisher or any other round and uneven surface where rigid cannot be used.

Rigid Sheet (R)

A robust and durable self-adhesive sheet which can be fixed on any surface most suitable for indoor signs.

Aluminium (A)

For use where industrial durability and quality is required suitable for both indoor and outdoor use.

PVC Foam (F)

For use where General durability and quality is required suitable for indoor use.

CONVENIENCE

All **GLOMAKE** signs unlike conventional sings come with High-grade self-adhesive gumming. It does not require any drilling, screwing or adhesive.

Simply peel off the backing paper and apply.

Signages Standards

International

- ☆ PSPA class B
- ☆ DIN 67510 Part 1-4
- ☆ IMO resolution A 752 (18)
- ☆ BS 5499-1
- ☆ ISO 15370 ASTM E 2072-4
- ☆ NFPA life safety code 101/101B
- ☆ UL 924
- ☆ OSHA 1910.37


Indian

- ☆ IS 9457
- ☆ IS 12349-1988
- ☆ IS 13716
- ☆ IS 1644
- ☆ NBC 1983 (SP 7 : Part 4)

Emergency Lights standard

- ☆ NBC Sp7: 1983 Part IV Fire Protection 1997.
- ☆ IS 9457-1980 Reaffirmed 1997 Code of practice For safety colors and safety signs
- ☆ IS 12349-1988 Fire Protection safety signs.
- ☆ IS:13716 Fire Safety in hotels code of practice .
- ☆ IS: 1644-1988 Code of practice for fire safety . of building General Exit requirement an personal hazard .
- ☆ IS:1646 Code of practice for safety of building for Electrical installations.
- ☆ IS: 12407-1988 Graphics symbols for fire protections plans.



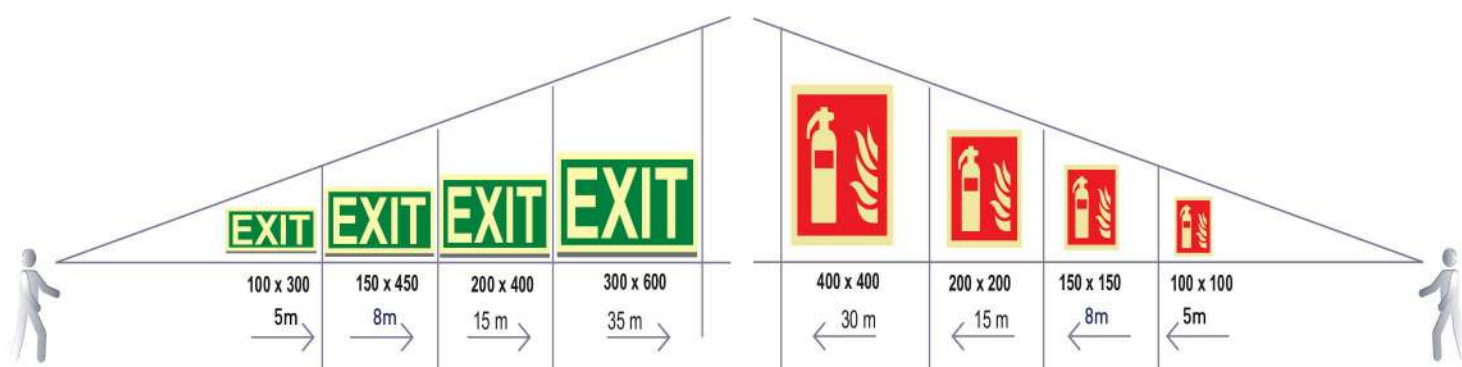


Our services

Employers have legal duty to undertake a risk assessment relating to health and safety of the employees, contractors are visitors, and provide safety signs on any workplace risk that is not satisfactorily controlled by other means. as the India' leading safety signage expert, all of the glomake signs available throughs this catalogue now meet the IS standard and customers buying signs from glomake can be confident that they buying the most current signage which confirm to current Indian standards

Site survey

If your unsure of your legal requirements with regards to your signage our specialist team of site survey experts can help .

We can make you feel confident all your required signs meet the legislation and safety practice.

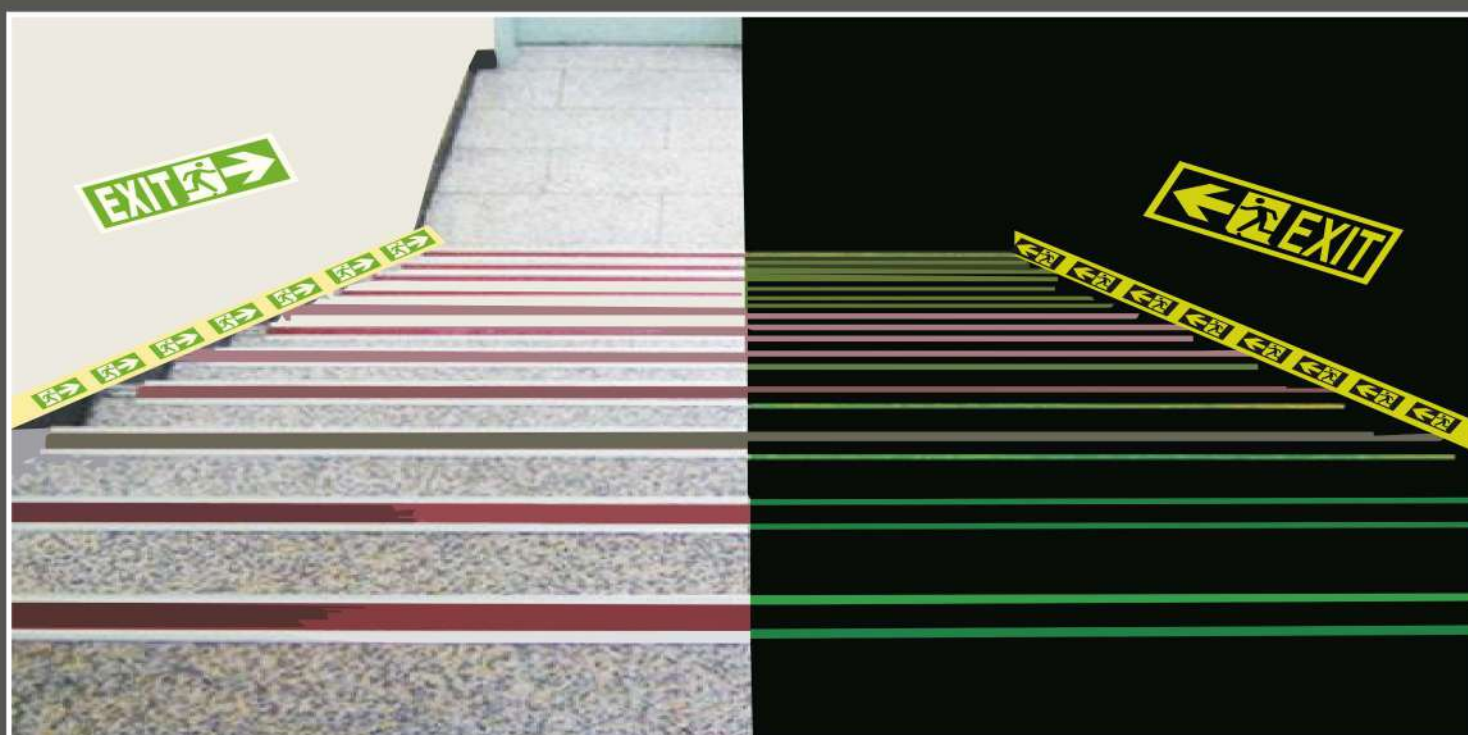

DIRECTIONAL EXIT SIGNS



Product code:
GD 01 (100 x 300mm)
(150 x 400mm)



Product code:
GD 02 (100 x 300mm)
(150 x 400mm)



Product code:
GD 37 (100 x 300mm)
(150 x 400mm)



Product code:
GD 68 (100 x 300mm)
(150 x 400mm)



Product code:
GD 69 (100 x 300mm)
(150 x 400mm)



Product code:
GD 25 (100 x 300mm)
(150 x 400mm)



Product code:
GD 24 (100 x 300mm)
(150 x 400mm)



Product code:
GD 11 (100 x 300mm)
(150 x 400mm)



Product code:
GD 09 (100 x 300mm)
(150 x 400mm)



Product code:
GD 10 (100 x 300mm)
(150 x 400mm)



Product code:
GD 97 (100 x 300mm)
(150 x 400mm)



Product code:
GD 98 (100 x 300mm)
(150 x 400mm)



Product code:
GS 69 (100 x 300mm)
(150 x 400mm)



Product code:
GD 31 (100 x 300mm)
(150 x 400mm)



Product code:
GD 71 (100 x 300mm)
(150 x 400mm)



Product code:
GD 100 (100 x 300mm)
(150 x 400mm)



Product code:
GD 99 (100 x 300mm)
(150 x 400mm)



Product code:
GD 58 (50 x 100mm)
(150 x 400mm)



Product code:
GG 30 (100 x 300mm)
(150 x 400mm)



Product code:
GD 67 (100 x 300mm)
(150 x 400mm)

Safety & General Signs



Product code:
GS 37 (100 x 300mm)
(150 x 400mm)



Product code:
GS 38 (100 x 300mm)
(150 x 400mm)



Product code:
GS 40 (100 x 300mm)
(150 x 400mm)



Product code:
GM 1 (100 x 300mm)
(150 x 400mm)



Code: GS 36
(300 x 450mm) (600 x 600mm)


GLOMAKE PHOTOLUMINESCENT TAPES



Product code:
GT 01 (40mm X 10mtr)
GT 02 (80mm X 10mtr)



Product code:
GT 03 (40mm X 10mtr)
GT 04 (80mm X 10mtr)



Product code:
GT 05 (40mm X 10mtr)
GT 06 (80mm X 10mtr)



Product code:
GT 07 (40mm X 10mtr)
GT 08 (80mm X 10mtr)




Product code:
GT 09 (40mm X 10mtr)
GT 10 (80mm X 10mtr)



Product code:
GT 11 (40mm X 10mtr)
GT 12 (80mm X 10mtr)



Product code:
GT 13 (40mm X 10mtr)
GT 14 (80mm X 10mtr)



Product code:
GT 15 (50mm X 10mtr)
GT 16 (80mm X 10mtr)

FIRE EXTINGUISHER IDENTIFICATION



Product code:
GF 57 (100 x 300mm)
(200 x 250mm)



Product code:
GF 60 (100 x 300mm)
(200 x 250mm)



Product code:
GF 63 (100 x 300mm)
(200 x 250mm)



Product code:
GF 58 (100 x 300mm)
(200 x 250mm)



Product code:
GF 61 (100 x 300mm)
(200 x 250mm)



Product code:
GF 62 (100 x 300mm)
(200 x 250mm)



Product code:
GF 01 (100 x 300mm)
(150 x 400mm)



Product code:
GF 07 (100 x 300mm)
(150 x 400mm)



Product code:
GF 06 (100 x 300mm)
(150 x 400mm)



Product code:
GF 09 (100 x 300mm)
(150 x 400mm)



Product code:
GF 03 (100 x 300mm)
(150 x 400mm)



Product code:
GF 20 (100 x 300mm)
(150 x 400mm)

FIRE FIGHTING EQUIPMENT



Product code:
GF 34 (150 x 150mm)
(200 x 250mm)



Product code:
GF 35 (150 x 150mm)
(200 x 250mm)



Product code:
GF 37 (150 x 150mm)
(200 x 250mm)



Product code:
GF 36 (150 x 150mm)
(200 x 250mm)



Product code:
GF 38 (150 x 150mm)
(200 x 250mm)



Product code:
GF 40 (150 x 150mm)
(200 x 250mm)



Product code:
GF 39 (150 x 150mm)
(200 x 250mm)



Product code:
GC 01 (200 x 200mm)
(300 x 300mm)




Product code:
GF 41 (150 x 150mm)
(200 x 250mm)



Product code:
GF 42 (150 x 150mm)
(200 x 250mm)

PARKING AND SECURITY SIGNS



Product code:
GMS 49 (300 x 300mm)
(450 x 450mm)



Product code:
GDE 14 (200 x 250mm)
(350 x 450mm)



Product code:
GW 80 (150 x 150mm)
(150 x 150mm)



Product code:
GG 30 (200 x 200mm)
(300 x 300mm)



Product code:
GP 38 (200 x 300mm)
(300 x 450mm)




Product code:
GELC 50 (200 x 300mm)
(300 x 450mm)

FIRE & EMERGENCY SIGNS



Product code:
GP 15 (100 x 300mm)
(200 x 250mm)




Product code:
GF 79 (300 x 450mm)
(450 x 600mm)



Product code:
GF 83 (300 x 450mm)
(450 x 600mm)

FIRE EVACUATION PLAN




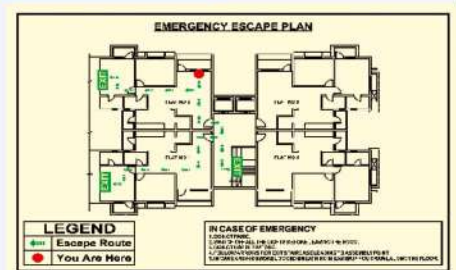


Product code: GEP 01 (Size - A4, A3, A2, A1, A0)

LED Sleek Exit / Egress Lights

Special application LED signs, low operating cost with high lamp life of more than 15 yrs. and consumption less than 5W. Also available flashing LED EXIT Signs in Emergency modes. Also available in backlit & direct type modes.



MODULE	TYPES	LED	BATTERY-BACK UP
GEL LED SEL / M	Maintained	3W led	3 hrs. Back-up
GEL LED SEL/M/P	Maintained Photoluminescent	3W led	3 hrs. Back-up
GEL LED SEL/WB	Without-Battery	3W led	Without-Back-up

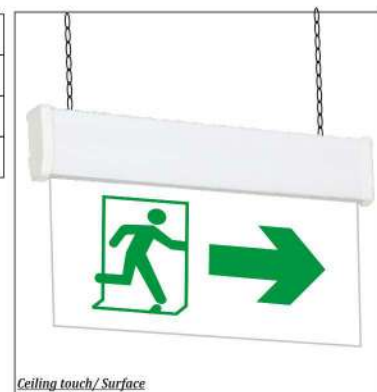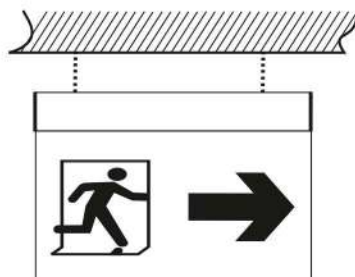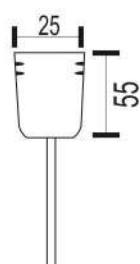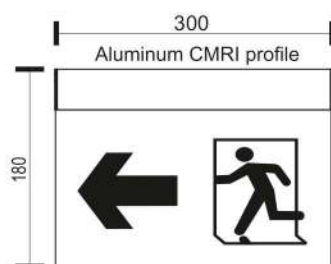

Decorative LED Exit / Egress Lights

Emergency lighting is required in most public buildings, hospitals, factories and hotels to ensure that exit and escape paths are illuminated in the event of mains power failure. We have an exhaustive range of Exit/Fire Exit, guide lights/safety lights/community signs to ensure an orderly and peaceful dispersal of crowd from public places. Also available in three level of safety -mains operated, battery operated and Photoluminescent modes.

MODULE	TYPES	LED	BATTERY-BACK UP
GEL LED WEL / M	Maintained	3W led	3 hrs. Back-up
GEL LED WEL/M/P	Maintained Photoluminescent	3W led	3 hrs. Back-up
GEL LED WEL/WB	Without-Battery	3W led	Without Back-up

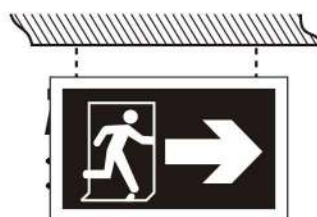


Extra Features

- + IP Ratings + Ni-Mh / Ni-Cd Rechargeable Battery + Constant Current Charger + ABS White Plastic Housing
- + ABS Molded Reeded Diffuser + Battery Duration 10% + 16 to 24 hrs. Recharging Time + Confirms to IS : 9583:1981


An attractive rounded dome rectangular housing suitable for mounting / portable use. Automatically Switches-ON on mains power failure and provides illumination on battery source for specified duration, after which the battery gets automatically cut-off, to facilitate quick recharge on resumption of mains supply. Once the battery is totally charged it automatically slides into trickle charge to constantly retain the charge and be ready for immediate use.

GEL LED TBEL/NM	Non-Maintained	2 Lamps LED	6 hrs. Back-up
-----------------	----------------	----------------	----------------

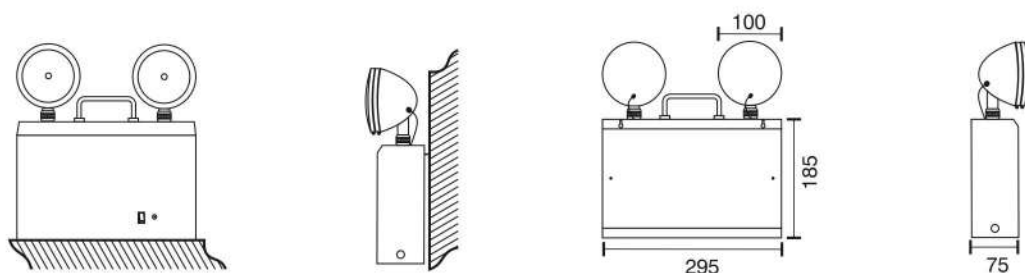

TBEL : Twin Beam Emergency Light
TBEL RM : Recessed Mounting

GEL LED MBL/NM	Non-Maintained	2 Lamps LED	6 hrs. Back-up
GEL LED MBL/NM	Maintained	2 Lamps LED	12 hrs. Back-up

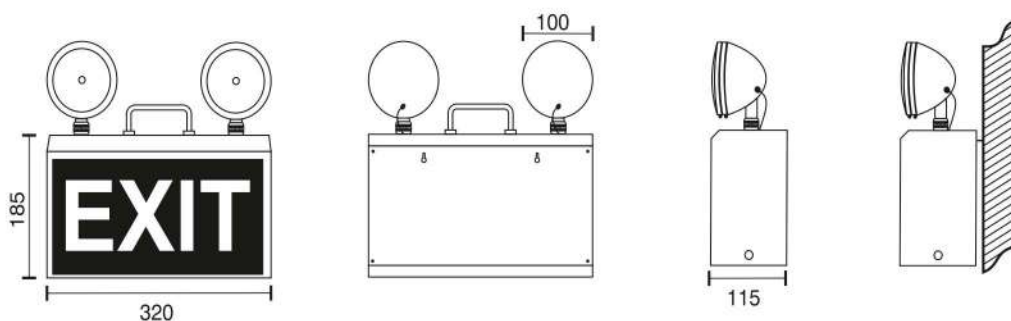


Also available in Black Body



Also available in Black Body

Extra Features

- + IP Ratings
- + Red LED "ON" Standby Mode
- + White Powder Coated Housing.
- + Constant Voltage Charger
- + Battery Duration 10%
- + Input ~230 V, 50Hz (others available)
- + 22 SWG CRCA.
- + 16 to 24 hrs. Recharging Time
- + SLA Rechargeable Battery

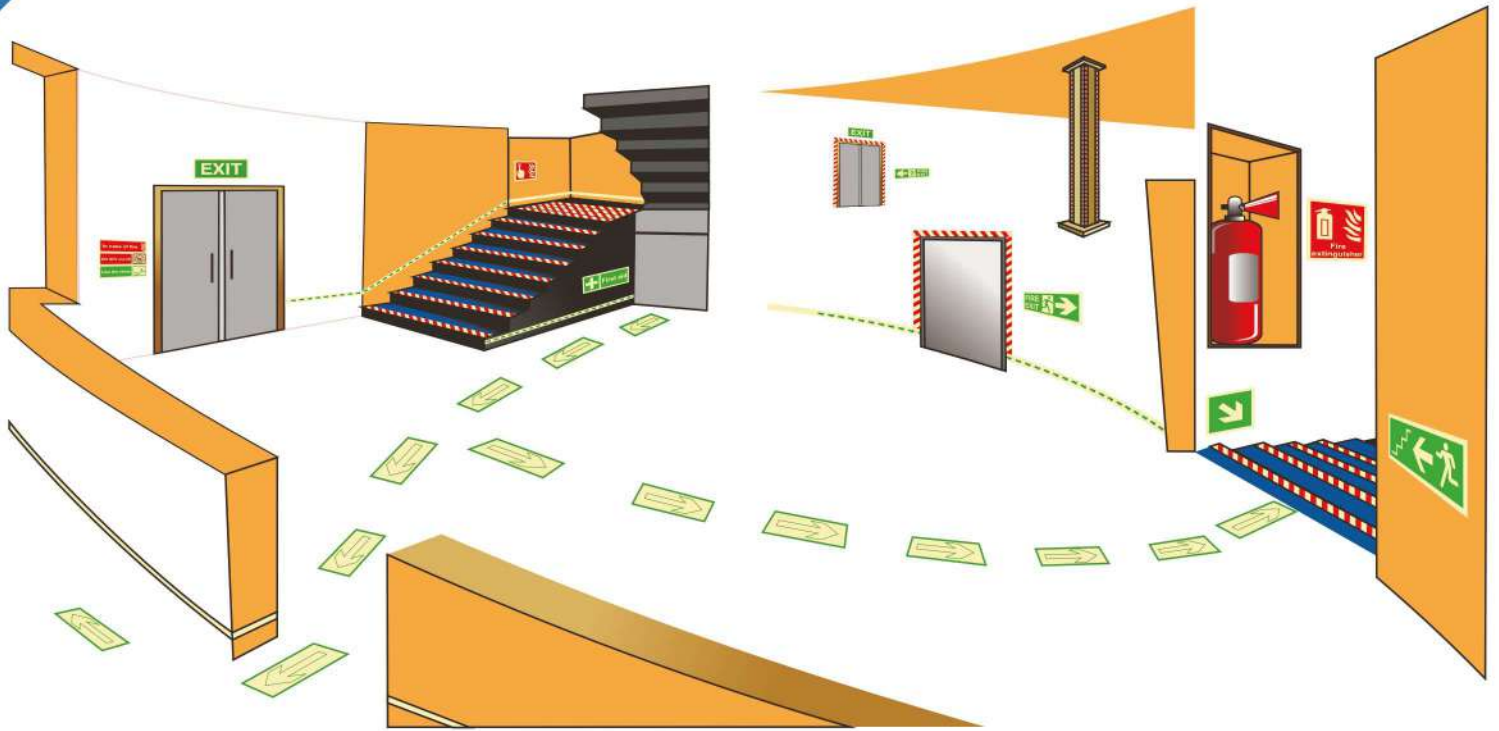

 **+91 8460 699 569**

 **expertsafetysolution@gmail.com**

 **Office no. 1-2, Ground Floor, D-22,
Industrial Society, New Sama Road,
Vadodara - 390002. Mo. 9157850986**

 **GST 24COMPP8380J1Z9**

 **www.expertsafety.in** 

Scan
This QR For
Digital Catalogue



**We supply all types of
Fire and Safety Equipment**