



STEP 6: Now that your monitor is secure, run your cords down the monitor arm through the handle.




STEP 7: Once your cords are in place, push the monitor arm cover into place, flush with the top of the arm. This is used to hide your cords and give you a finished look.



STEP 8: To place your graphic around your case, simply remove it from the protective tube. **DO NOT DISCARD!** Find the Velcro tab on the graphic and under the lip of the case lid.



STEP 9: Attach the Velcro tab from the graphic to the lid tab and carefully wrap the banner graphic around the entire case.

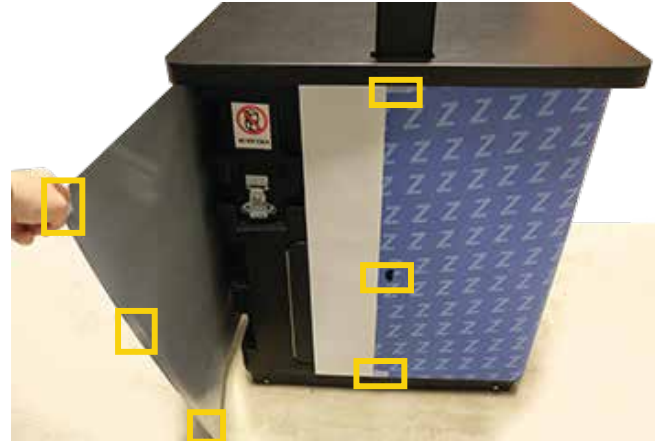

STEP 10: Once you have wrapped the banner graphic around the case, secure it into place using the velcro tabs on the edge of the graphic to the inner seam of the banner graphic. **Velcro tabs marked above.**



STEP 11: If you have done so, you can carefully slide your monitor kiosk into place. Be mindful of your cords. The cords and the door may cause the graphic in the back to bulge slightly.
Finished Banner Case Wrap with Monitor

Link Mini-Case - Case-to-Counter and TV/Monitor Assembly



STEP 1: After your display has been built, place lid on top of case bottom and secure latches. Be sure the door & lid handle are facing the same side.



STEP 2: Place monitor arm through lid handle and screw into place on the top lid.



See Close-Up of screw placement.



STEP 3: Now, place your counter top over the monitor arm and slide down to cover your case lid.



STEP 4: Monitor Installation: Be sure your VESA plate is connected to your monitor. Take any cords and place them through the wire management hole on the monitor arm before you secure the monitor into place.



STEP 5: Next, lift your monitor up to desired height and screw the monitor into place. See Close-Up Above.

Link Mini-Case - Case-to-Counter and TV/Monitor Assembly