

KPR
KING POWER
YOUR PARTNER IN SAFETY

KPR® FEATURES

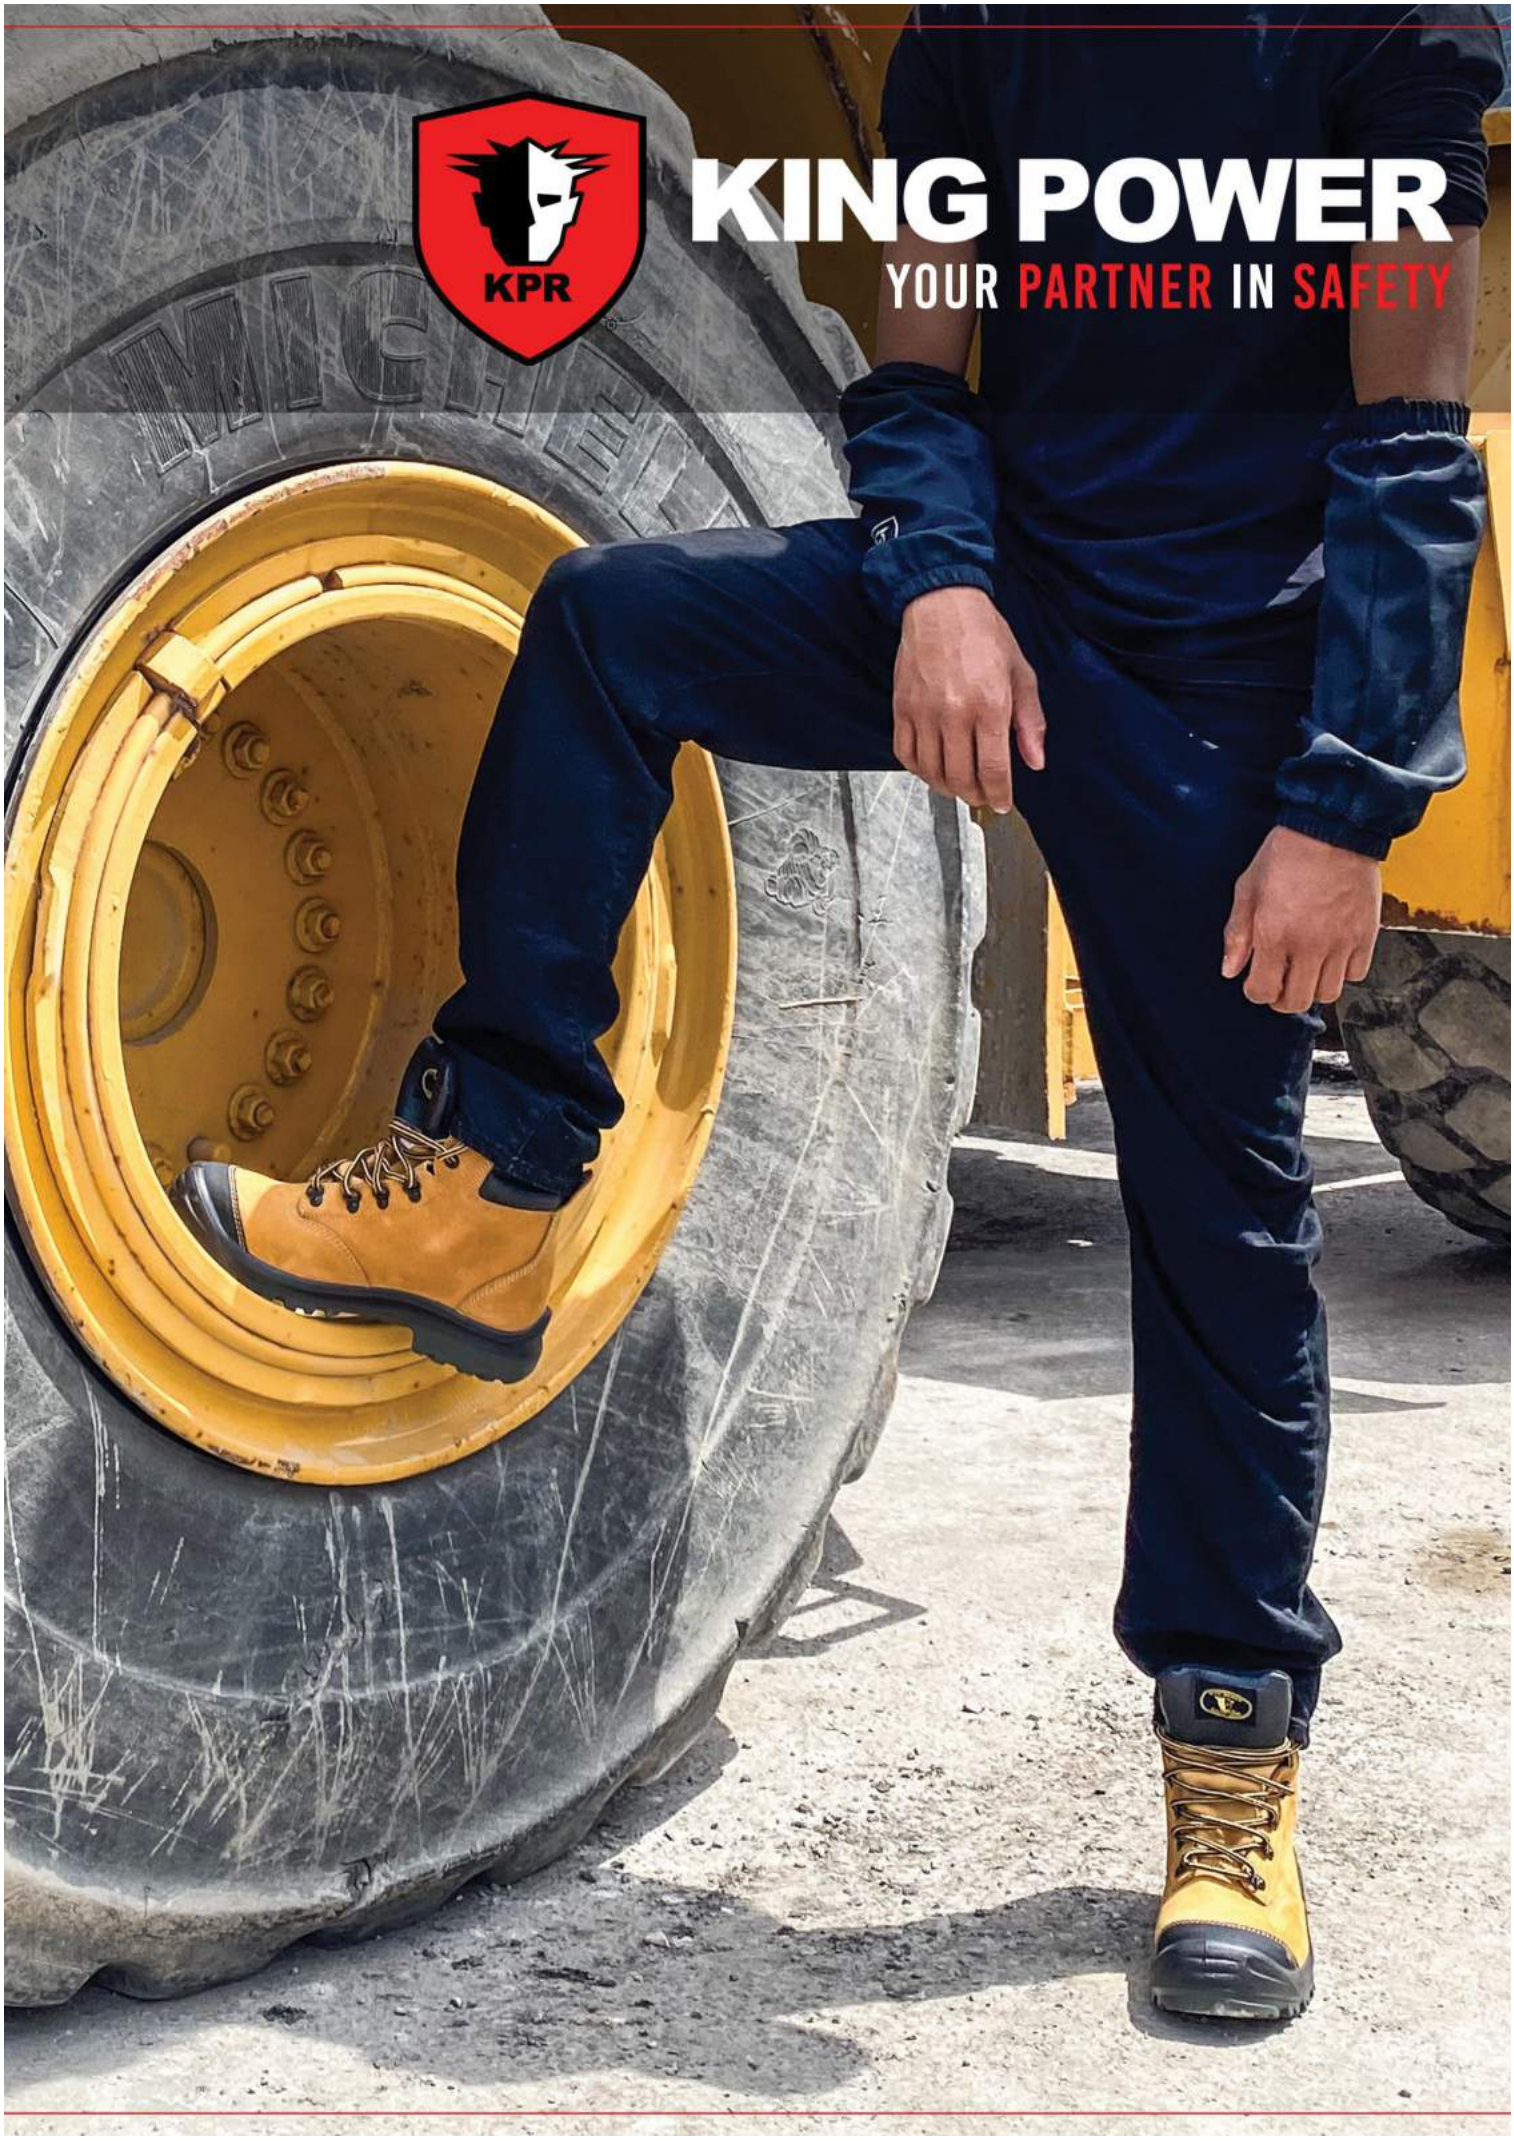

- PADDED COLLAR & TONGUE
- PREMIUM WATERPROOF SUEDE LEATHER
- BREATHABLE COMFORT FOOTBED
- ANTI-STATIC
- SLIP-RESISTANT OUTSOLE
- ANTI-PUNCTURE TEXTILE BOARD (NON-METAL)
- DUAL DENSITY POLYURETHANE (PU) OUTSOLE
- BREATHABLE, WEAR RESISTANT MESH LINING
- RUST PROOF D-RINGS
- IMPACT-RESISTANT COMPOSITE TOECAP (NON-METAL)
- KICK AND SCRATCH RESISTANT PU SCUFF-TOE
- LIGHTWEIGHT & CUSHIONING PU MIDSOLE

ABOUT KPR®

KPR has 50 years of safety shoemaking experience with manufacturing facilities in China, Malaysia, Indonesia, and Canada. KPR's vertical integration of its manufacturing process, whereby every part of a footwear is manufactured and assembled in-house, allows for speed, control and flexibility in the manufacturing process.

WHY KPR®?

RELIABLE PARTNER

Our customer service and sales representative teams have the expertise to answer any questions you have about choosing the right safety footwear for your industry.

PEACE OF MIND

KPR's leading edge technical center for outsole research and development is committed to producing the highest quality safety footwear in durability and comfort.

QUALITY ASSURANCE

KPR's state of the art testing lab ensures our quality management system meets the highest requirements and our plant is certified in accordance with the ISO 9001:2015 quality management standard.

KPR® SIZING


UK	4	5	6	7	8	9	10	11	12
FR	37	38	39/40	41	42	43	44/45	46	47



INDUSTRIAL L SERIES

Abrasion and slip-resistant outsole





Non-metallic Composite Toecap meets EN 20345: 200 Joules Impact



Safety Toecap



Heel Energy Absorption



Anti-static



Slip Resistant



Lightweight Shoe



Abrasion Resistant Sole



Oil & Fuel Resistant



Breathable Upper



Heat Resistant Sole 130℃

Toecap

Non-metallic Composite

Upper

Full Grain Buffalo Leather

Lining

BK Mesh Fabric

Outsole

Dual Density Polyurethane (PU) Outsole

Electrical Conductivity

Anti-static

Footbed

Moulded Comfort EVA



L-026X

BLACK LOW-CUT LACE-UP SHOE

Size | UK 4-12 / FR 37-47



L-026

BLACK ANKLE LACE-UP BOOT

Size | UK 4-12 / FR 37-47



L-807

BLACK LOW-CUT SLIP-ON SHOE

Size | UK 4-12 / FR 37-47


INDUSTRIAL L SERIES

METAL-FREE

Abrasion and slip-resistant outsole







Non-metallic Composite Toecap meets EN 20345: 200 Joules Impact

Safety Toecap | Heel Energy Absorption | Anti-static | Slip Resistant | Lightweight Shoe | Abrasion Resistant Sole | Oil & Fuel Resistant | Breathable Upper | Heat Resistant Sole 130℃

Toecap
Non-metallic Composite

Outsole
Dual Density Polyurethane (PU) Outsole

Upper
Full Grain Buffalo Leather

Electrical Conductivity
Anti-static

Lining
BK Mesh Fabric

Footbed
Moulded Comfort EVA



L-706
BLACK MID-CUT ELASTIC PULL-UP BOOT

Size | UK 4-12 / FR 37-47



L-805H
BROWN HIGH-CUT RIGGER BOOT

Size | UK 4-12 / FR 37-47




L-806
BLACK MID-CUT ZIPPER BOOT

Size | UK 4-12 / FR 37-47

LIGHTWEIGHT O SERIES





Safety Toecap | Heel Energy Absorption | Anti-static | Slip Resistant | Lightweight Shoe | Abrasion Resistant Sole | Oil & Fuel Resistant | Breathable Upper | Heat Resistant Sole 130℃

Toecap
Non-metallic Composite

Outsole
Lightweight Dual Density PU/Rubber Outsole

Lining
BK Mesh Fabric

Electrical Conductivity
Anti-static

Footbed
Moulded Comfort EVA

Upper
Japan Hi-end Microfibre



O-807W
WHITE LOW-CUT SLIP-ON SHOE

Size | UK 4-12 / FR 37-47

WATERPROOF L SERIES



Toecap
Non-metallic Composite

Outsole
Dual Density Polyurethane (PU) Outsole

Lining
BK Mesh Fabric

Electrical Conductivity
Anti-static

Footbed
Impact Absorption Breathable Cushion PU

Upper
Water Resistant Nubuck Leather



L-222NB
WHEAT MID-CUT LACE-UP BOOT

Size | UK 4-12 / FR 37-47

BENEFITS OF COMPOSITE TOECAP

- Metal-free work shoes, practical when working in electrical hazardous environment or workplaces with metal detectors such as airports and government buildings.
- Lighter compared to a steel toe cap, reducing stress and fatigue on the legs and joints throughout long workdays.
- Not conducting heat or cold in extreme temperatures, for extra comfort.

ATHLETIC I SERIES



Upper | Japan Hi-end Microfibre
Lining | BK Mesh Lining
Toecap | Non-metallic Composite
Footbed | Moulded Comfort EVA
Outsole | Lightweight Dual Density Polyurethane (PU)/Rubber Outsole
Electrical Conductivity | Anti-static



Non-metallic Composite Toecap meets EN 20345: 200 Joules Impact

Safety Toecap | Heel Energy Absorption | Anti-static | Slip Resistant | Lightweight Shoe | Abrasion Resistant Sole | Oil & Fuel Resistant | Breathable Upper | Heat Resistant Sole 130℃

I-881B

BLACK/BLUE LOW-CUT LACE-UP SHOE


Size | UK 4-12 / FR 37-47



PU FOOTBED

COMFORT AND STABILITY

- Anti-Fatigue
- Energy Absorption
- Air Channel System
- Comfort Heel Cushion

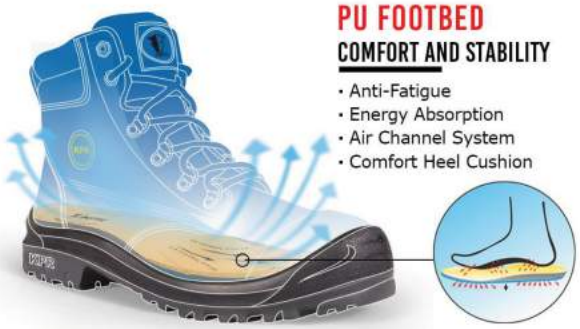

KPR®
YOUR PARTNER IN SAFETY

PT. DUNIA SAFTINDO
Office Tower A Lt. 5
Superblok Mega Kemayoran
Jl. Angkasa Kav B6, Jakarta 10610

CE EN20345 | SA® Z 195-14 | TÜV SÜD PSB PLS Listed SS 513:2013 LIC:00 294 | R32354 | MS SIRIM MS ISO 20345: 2008 PC002140 | SNI 7079-2009 NPB 115-116-181541

KING POWER




BRINGING TECHNOLOGY INTO SAFETY



I-881 Blue

• PROTECTION
Extra wide toe cap , designed and engineered for comfort. protection,light weight, and flexibility.



• UPPER
Exclusive Japan Microfiber Leather
Chemical Resistant Upper
Breathable,Water Resistant
Full Inner Lining
Light Weight



• OUTSOLE
Injected Polyurethane with special formulated Rubber to provide both work functionality, comfort, ultra light weight, and non marking. New Innovation to provide ultimate slip resistance performance. Tread designed for superior traction, stability, heel shock absorption, and easy clean.
Heat Resistance only up to 120 degree Celsius.



• EXTRA WIDE TOE CAP GREAT FITTING



• FOOTBED
Removable Thick Cushion EVA insole. Comfort heel cushion, arch stability, and air channel system.

TOE PROTECTION | SLIP RESISTANCE | LIGHT WEIGHT | SOLE PROTECTION | ABRASION RESISTANT | OIL RESISTANT

SPECIFICATIONS	
Model	I-881 Blue
Safety Toe	Composite toe cap
Material	Exclusive Japan Microfiber
Color	Blue
Lining	BK mesh lining
Sole	Light weight PU with special formulated Rubber
Size	UK 3-12
Insole	Thick cushion EVA. Provide support, comfort and stay dry

www.kprsafety.com


CE EN20345 | PLS Listed SS 513:2005 LIC:00 294 | R32354 | SIRIM MS ISO 20345: 2008 PC002140 | SNI 7079:2009

I-881-U0025

KPR®



BRINGING TECHNOLOGY INTO SAFETY

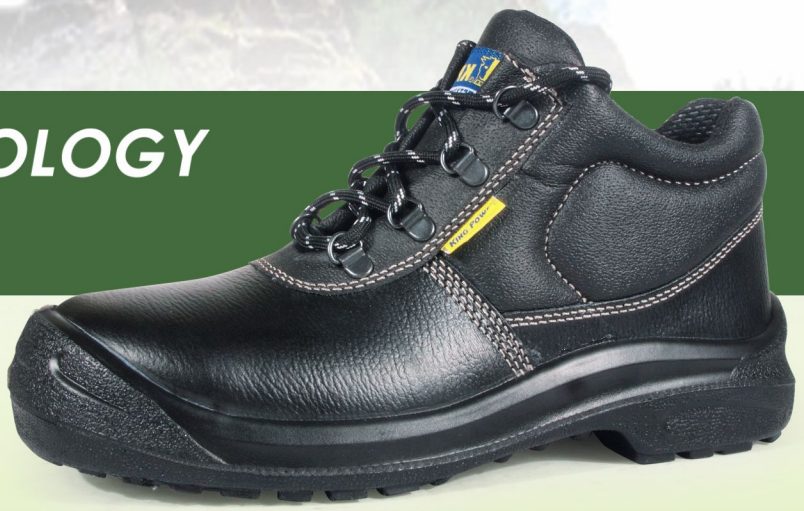

• PROTECTION

Extra wide toe cap for comfort. Quality checked and tested to meet CE EN ISO 20345 standards.
Protective scuff toe was designed to help protect and prolong the life of the safety shoe. Steel midsole for work environments that require protection from sole penetration.

TOE PROTECTION | ESD | SLIP RESISTANCE | LIGHT WEIGHT | SOLE PROTECTION | ABRASION RESISTANT | OIL RESISTANT

• UPPER

Buffalo full grain printed leather
Full Inner Lining
Light Weight



• OUTSOLE

Dual Density Injected Polyurethane to provide both work functionality, comfort, light weight, and non-marking. New innovation to provide ultimate slip resistance performance. Tread designed for superior traction, stability, heel shock absorption, and easy clean.
Heat Resistance only up to 120 degree Celsius.



• EXTRA WIDE TOE CAP GREAT FITTING



• FOOTBED

Removable Thick Cushion PU footbed. Comfort heel cushion, arch stability, and air channel system.



SPECIFICATIONS	
Model	**L-026**
Safety Toe	Composite toe cap
Electrical feature	ESD
Material	Buffalo full grain printed leather
Color	Black
Lining	BK mesh lining
Sole	Dual density PU/PU outsole, SRC
Size	UK 2-13 / EU 35-48
Footbed	Thick cushion EVA, Provide support, comfort and stay dry

• KPR SLIP RESISTANCE TEST RESULTS

	Coefficient of Friction		
		Requirement	KPR L-sole Results*
SRC (SRA +SRB)	SRA Ceramic Tile + SLS	Forward Flat Slip 0.32	0.62-0.63
		Forward Heel Slip 0.28	0.49-0.50
	SRB Stainless Steel + Glycerol	Forward Flat Slip 0.18	0.64-0.69
		Forward Heel Slip 0.13	0.22-0.23

*Slip resistance testing conducted by Intertek (2011)

www.kprsafety.com

CE EN20345 | PLS Listed SS 513:2005 LIC:00 294 TÜV SÜD PSB | R32354 | MS SIRIM MS ISO 20345: 2008 PC002140 | SNI 7079:2009

L-026-U0025

KING POWER



BRINGING TECHNOLOGY INTO SAFETY



- TOE PROTECTION
- ESD
- SLIP RESISTANCE
- LIGHT WEIGHT
- SOLE PROTECTION
- ABRASION RESISTANT
- OIL RESISTANT

• PROTECTION

Extra wide toe cap for comfort. Quality checked and tested to meet CE EN ISO 20345 standards. Protective scuff toe was designed to help protect and prolong the life of the safety shoe. Steel midsole for work environments that require protection from sole penetration.

• UPPER

Buffalo full grain printed leather
Full Inner Lining
Light Weight



• OUTSOLE

Dual Density Injected Polyurethane/ Polyurethane to provide both work functionality, comfort, light weight, and non-marking. New Innovation to provide ultimate slip resistance performance. Tread designed for superior traction, stability, heel shock absorption, and easy clean.
Heat Resistance only up to 120 degree Celsius.



• EXTRA WIDE TOE CAP GREAT FITTING



• FOOTBED

Removable Thick Cushion EVA footbed. Comfort heel cushion, arch stability, and air channel system. Single pack footbed also available for purchase.



SPECIFICATIONS

Model	L-706
Safety Toe	Composite toe cap
Electrical feature	ESD
Material	Buffalo full grain printed leather
Color	Black
Lining	Cambrelle lining
Sole	Dual density PU/PU outsole, SRC
Size	UK 2-13 / EU 35-48
Footbed	Thick cushion EVA. Provide support, comfort and stay dry

• KPR SLIP RESISTANCE TEST RESULTS

	Coefficient of Friction		
		Requirement	KPR L-sole Results*
SRC (SRA +SRB)	SRA Ceramic Tile + SLS	Forward Flat Slip 0.32	0.62-0.63
		Forward Heel Slip 0.28	0.49-0.50
	SRB Stainless Stee + Glycerol	Forward Flat Slip 0.18	0.64-0.69
		Forward Heel Slip 0.13	0.22-0.23

*Slip resistance testing conducted by Intertek (2011)

www.kprsafety.com

EN20345

PLS Listed SS 513:2005 LIC:00 294 TÜV SÜD PSB

R32354

SIRIM MS ISO 20345: 2008 PC002140

SNI 7079:2009

L-706-U0025

KING POWER



BRINGING TECHNOLOGY INTO SAFETY



• PROTECTION

Extra wide toe cap for comfort. Quality checked and tested to meet CE EN ISO 20345 standards. Protective scuff toe was designed to help protect and prolong the life of the safety shoe. Steel midsole for work environments that require protection from sole penetration.

TOE PROTECTION | ESD | SLIP RESISTANCE | LIGHT WEIGHT | SOLE PROTECTION | ABRASION RESISTANT | OIL RESISTANT

• UPPER

Buffalo full grain printed leather
Full Inner Lining
Light Weight



• OUTSOLE

Dual Density Injected Polyurethane/ Polyurethane to provide both work functionality, comfort, light weight, and non-marking. New Innovation to provide ultimate slip resistance performance. Tread designed for superior traction, stability, heel shock absorption, and easy clean.
Heat Resistance only up to 120 degree Celsius.



• EXTRA WIDE TOE CAP GREAT FITTING



• FOOTBED

Removable Thick Cushion EVA footbed. Comfort heel cushion, arch stability, and air channel system. Single pack footbed also available for purchase.



SPECIFICATIONS

Model	L-805H
Safety Toe	Composite toe cap
Electrical feature	ESD
Material	Buffalo full grain printed leather
Color	Brown
Lining	BK mesh lining
Sole	Dual density PU/PU outsole, SRC
Size	UK 2-13 / EU 35-48
Footbed	Thick cushion EVA. Provide support, comfort and stay dry

• KPR SLIP RESISTANCE TEST RESULTS

	Coefficient of Friction		
		Requirement	KPR L-sole Results*
SRC (SRA +SRB)	SRA Ceramic Tile + SLS	Forward Flat Slip 0.32	0.62-0.63
		Forward Heel Slip 0.28	0.49-0.50
	SRB Stainless Steel + Glycerol	Forward Flat Slip 0.18	0.64-0.69
		Forward Heel Slip 0.13	0.22-0.23

*Slip resistance testing conducted by Intertek (2011)

www.kprsafety.com

EN20345 | PLS Listed SS 513:2005 LIC:00 294 TÜV SÜD PSB | R32354 | SIRIM MS ISO 20345: 2008 PC002140 | SNI 7079:2009

L-805H-U0025

KPR®



BRINGING TECHNOLOGY INTO SAFETY




• PROTECTION

Extra wide toe cap for comfort. Quality checked and tested to meet CE EN ISO 20345 standards.
Protective scuff toe was designed to help protect and prolong the life of the safety shoe. Steel midsole for work environments that require protection from sole penetration.

TOE PROTECTION | ESD | SLIP RESISTANCE | LIGHT WEIGHT | SOLE PROTECTION | ABRASION RESISTANT | OIL RESISTANT

• UPPER

Buffalo full grain printed leather
Full Inner Lining
Light Weight



• OUTSOLE

Dual Density Injected Polyurethane to provide both work functionality, comfort, light weight, and non-marking. New innovation to provide ultimate slip resistance performance. Tread designed for superior traction, stability, heel shock absorption, and easy clean. Heat Resistance only up to 120 degree Celsius.



• EXTRA WIDE TOE CAP GREAT FITTING



• FOOTBED

Removable Thick Cushion EVA footbed. Comfort heel cushion, arch stability, and air channel system. Single pack footbed also available for purchase.



SPECIFICATIONS

Model	L-806
Safety Toe	Composite toe cap
Electrical feature	ESD
Material	Buffalo full grain printed leather
Color	Black
Lining	BK mesh lining
Sole	Dual density PU/PU sole, SRC
Size	UK 2-13 / EU 35-48
Footbed	Thick cushion EVA, Provide support, comfort and stay dry

• KPR SLIP RESISTANCE TEST RESULTS

	Coefficient of Friction		
		Requirement	KPR L-sole Results*
SRC (SRA +SRB)	SRA Ceramic Tile + SLS	Forward Flat Slip 0.32	0.62-0.63
		Forward Heel Slip 0.28	0.49-0.50
	SRB Stainless Steel + Glycerol	Forward Flat Slip 0.18	0.64-0.69
		Forward Heel Slip 0.13	0.22-0.23

*Slip resistance testing conducted by Intertek (2011)

www.kprsafety.com

CE EN20345

PLS Listed SS 513:2005 LIC:00 294 TÜV SÜD PSB

R32354

SIRIM MS ISO 20345: 2008 PC002140

SNI 7079:2009

L-806-U0025

KING POWER



BRINGING TECHNOLOGY INTO SAFETY



• PROTECTION

Extra wide toe cap for comfort. Quality checked and tested to meet CE EN ISO 20345 standards. Protective scuff toe was designed to help protect and prolong the life of the safety shoe. Steel midsole for work environments that require protection from sole penetration.

TOE PROTECTION | ESD | SLIP RESISTANCE | LIGHT WEIGHT | SOLE PROTECTION | ABRASION RESISTANT | OIL RESISTANT

• UPPER

Buffalo full grain printed leather
Full Inner Lining
Light Weight



• OUTSOLE

Dual Density Injected Polyurethane/ Polyurethane to provide both work functionality, comfort, light weight, and non-marking. New Innovation to provide ultimate slip resistance performance. Tread designed for superior traction, stability, heel shock absorption, and easy clean.
Heat Resistance only up to 120 degree Celsius.



• EXTRA WIDE TOE CAP GREAT FITTING



• FOOTBED

Removable Thick Cushion EVA footbed. Comfort heel cushion, arch stability, and air channel system. Single pack footbed also available for purchase.



SPECIFICATIONS

Model	L-807
Safety Toe	Composite toe cap
Electrical feature	ESD
Material	Buffalo full grain printed leather
Color	Black
Lining	Cambrelle lining
Sole	Dual density PU/PU outsole, SRC
Size	UK 2-13 / EU 35-48
Footbed	Thick cushion EVA. Provide support, comfort and stay dry

• KPR SLIP RESISTANCE TEST RESULTS

	Coefficient of Friction		
		Requirement	KPR L-sole Results*
SRC (SRA +SRB)	SRA Ceramic Tile + SLS	Forward Flat Slip 0.32	0.62-0.63
		Forward Heel Slip 0.28	0.49-0.50
	SRB Stainless Steel + Glycerol	Forward Flat Slip 0.18	0.64-0.69
		Forward Heel Slip 0.13	0.22-0.23

*Slip resistance testing conducted by Intertek (2011)

www.kprsafety.com

EN20345 | PLS Listed SS 513:2005 LIC:00 294 TÜV SÜD PSB | R32354 | SIRIM MS ISO 20345: 2008 PC002140 | SNI 7079:2009

L-807-U0025