



On board

Connector

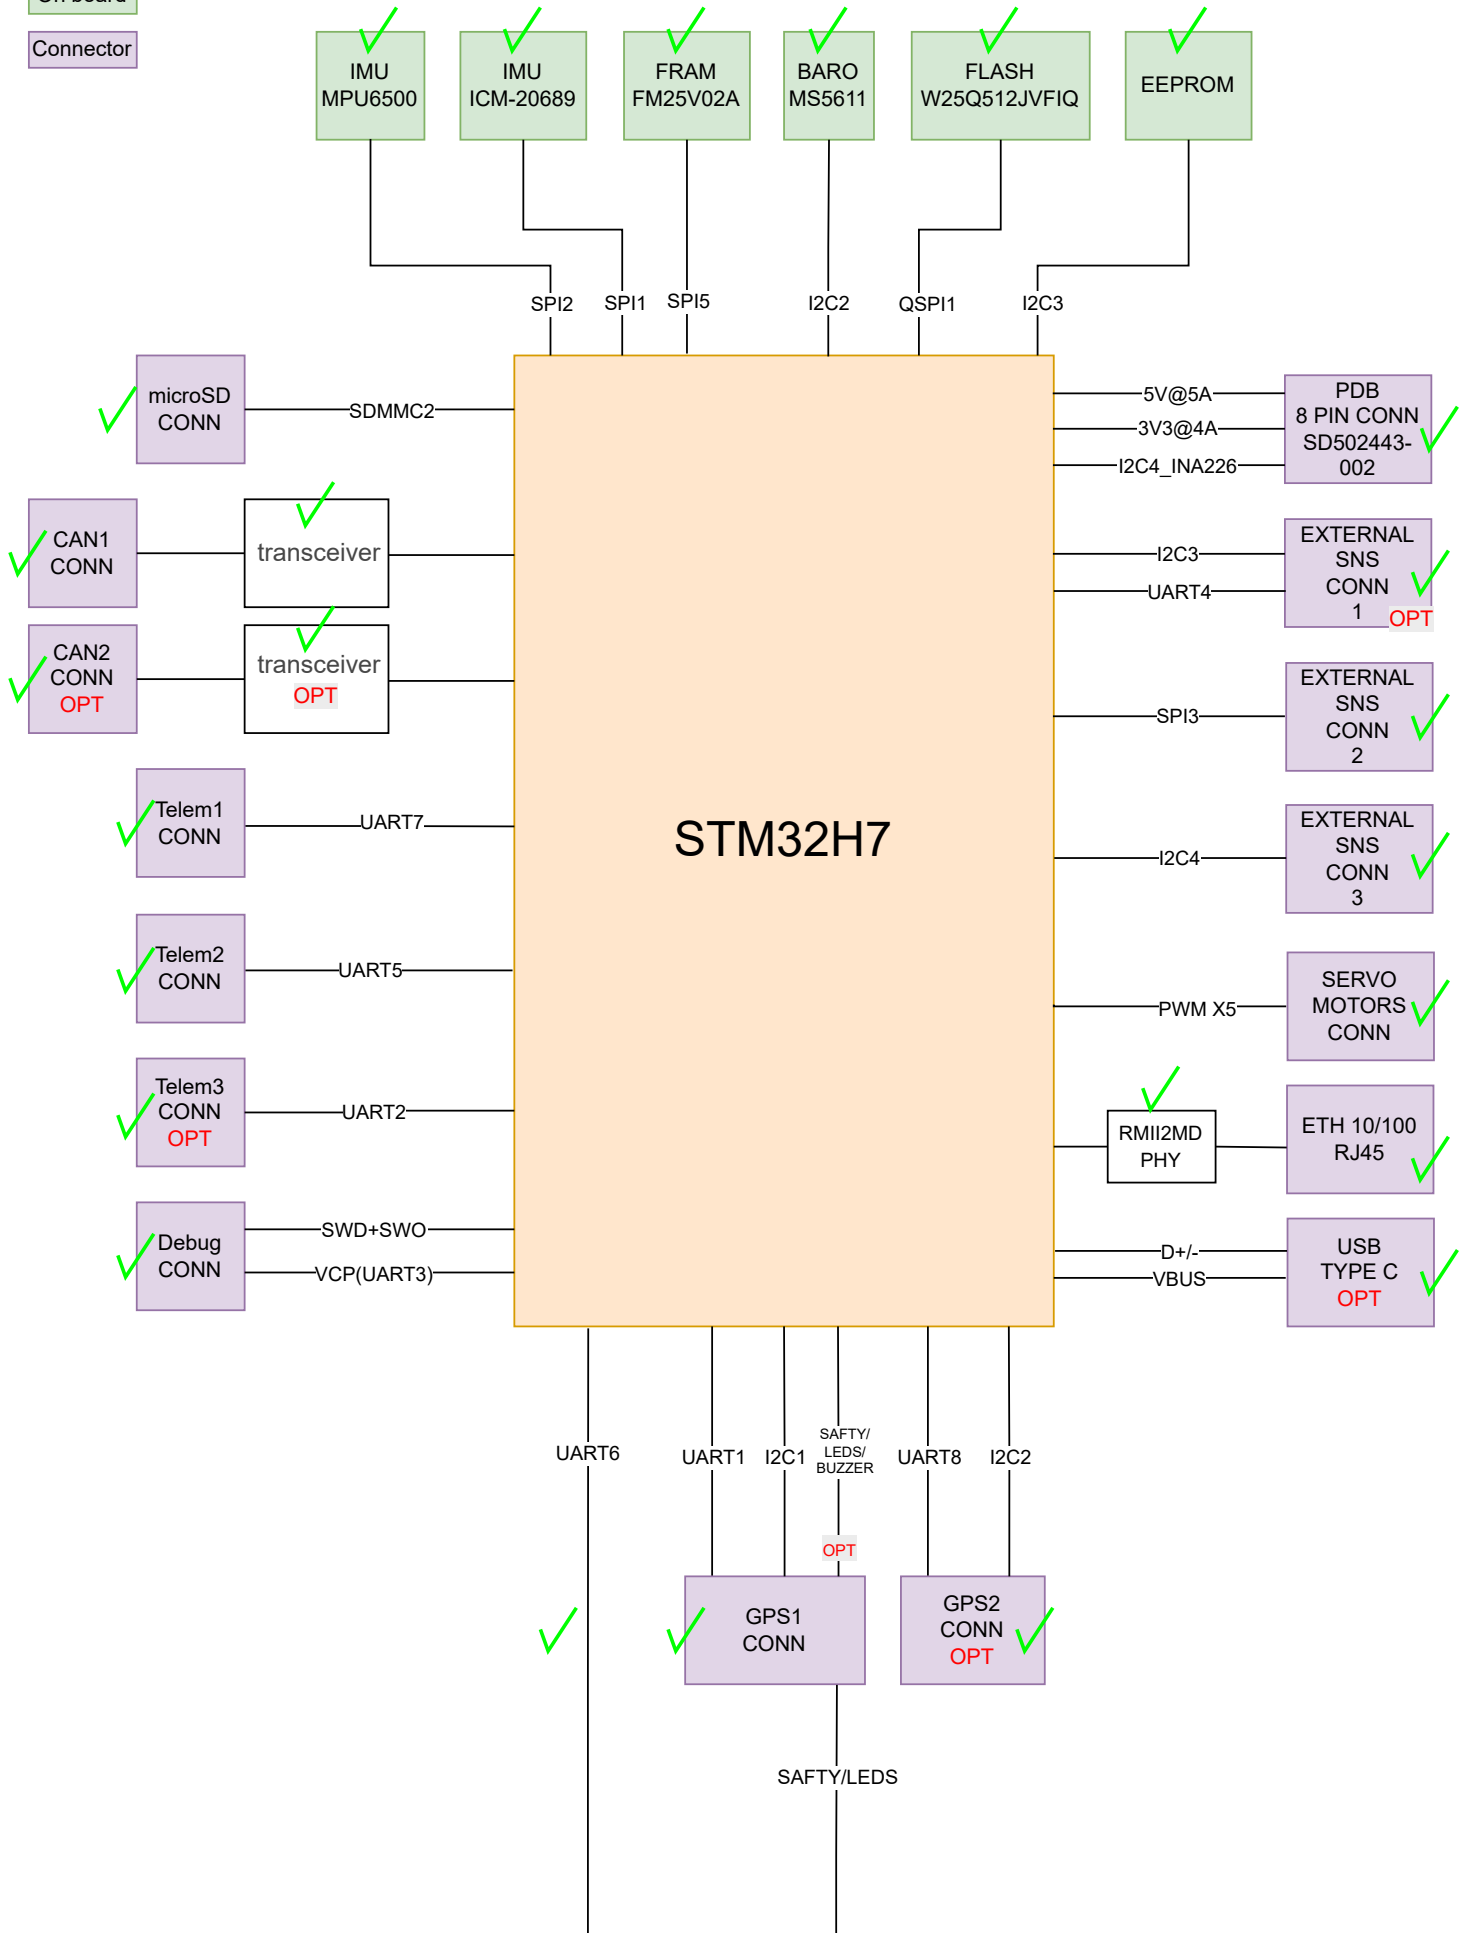

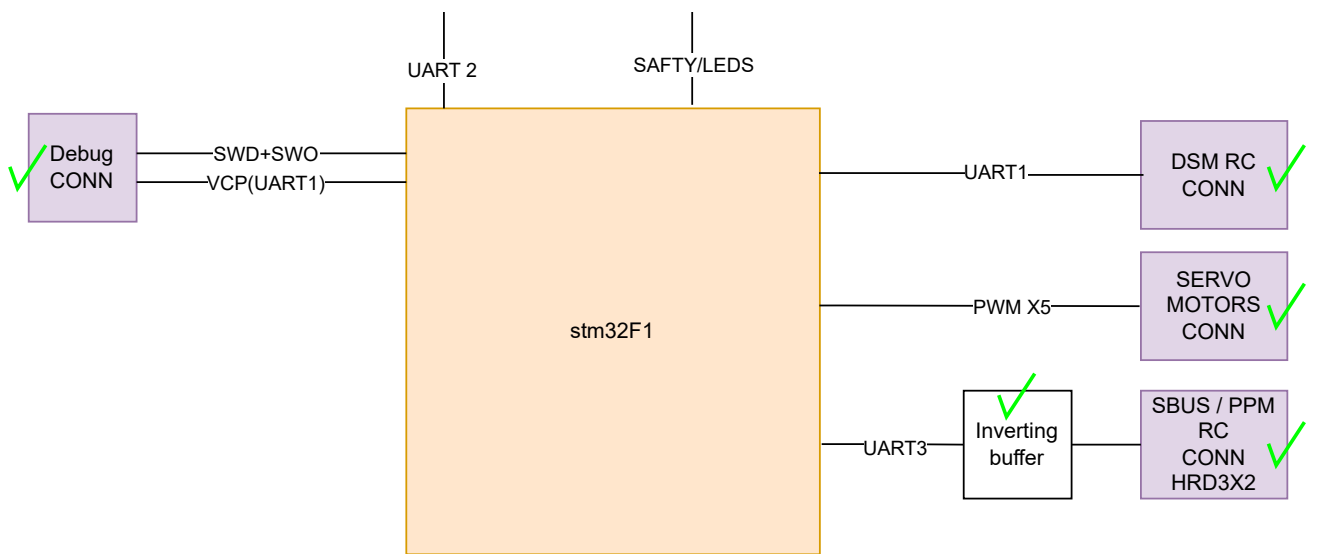

#### OPEN ISSUES:

- reset from outside-> no
- nARMED signal from stm32-> TP
- TRACE SYNC SW 4 BIT -> no
- bootloader/vbus sense -> no
- NFC\_GPIO -> TP
- HEATER for IMUs -> TP
- SPIX\_SYNC-> no
- FMU\_CAP1 (input pwm capture)-> TP
- sens for 3v3 & 5v-> no
- DSM -> for VCP
- USB\_TYPE\_C\_SENSE from power-> no
- BEC - Battery Eliminator Circuit (separete 5v for servo) -> no
- ETH conn is RJ45
- 4 holes are added
- test points
- USB