RoHS compliant


Φ9.0 x 5.0(h)mm

# BTK - 3P

| ORDERING CODE: | B T | K | – | 3 | P |
|---|---|---|---|---|---|
| | ① | ② | | ③ | ④ |

| | |
|---|---|
| ① | Magnetic Buzzer |
| ② | Series Number |
| ③ | Rated Voltage |
| ④ | None: Pin type, |

| NO | SPECIFICATION | DATA |
|---|---|---|
| 1 | Rated Voltage (V) | 3 |
| 2 | Operating Voltage (V) | 2~5 |
| 4 | Resonant Frequency (Hz) | 2700±300 |
| 5 | *Sound Output at 10cm (dB) | Min 80 |
| 6 | *Current Consumption (mA) | Max 30 |
| 7 | Operating Temperature (℃) | -20 ~ +70 |
| 8 | Storage Temperature (℃) | -30 ~ +80 |
| 9 | Weight (g) | 1g |
| 10 | Housing Material | ppo |
| 11 | RoHS | YES |
| 12 | Packing Quantity | 100pcs/box |

*Applying rated voltage (Resonant frequency, 1/2 duty, Square wave)

## DIENSIONS (unit : mm)

Tolerance: ±0.5mm Except Specified

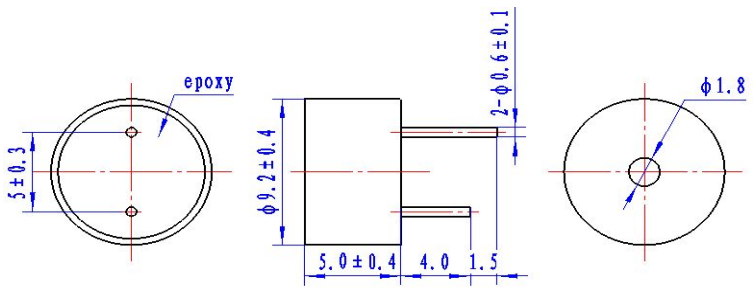

RoHS compliant


Φ9.0 x 5.0(h)mm

# BTK – 5P

| ORDERING CODE: | B T | K | – | 5 | P |
|---|---|---|---|---|---|
| | ① | ② | | ③ | ④ |

| | |
|---|---|
| ① | Magnetic Buzzer |
| ② | Series Number |
| ③ | Rated Voltage |
| ④ | None: Pin type, |

| NO | SPECIFICATION | DATA |
|---|---|---|
| 1 | Rated Voltage (V) | 5 |
| 2 | Operating Voltage (V) | 3 ~ 7 |
| 4 | Resonant Frequency (Hz) | 2700±300 |
| 5 | *Sound Output at 10cm (dB) | Min 85 |
| 6 | *Current Consumption (mA) | Max 30 |
| 7 | Operating Temperature (℃) | -20 ~ +70 |
| 8 | Storage Temperature (℃) | -30 ~ +80 |
| 9 | Weight (g) | 1g |
| 10 | Housing Material | ppo |
| 11 | RoHS | YES |
| 12 | Packing Quantity | 100pcs/box |

*Applying rated voltage (Resonant frequency, 1/2 duty, Square wave)

## DIENSIONS (unit : mm)

Tolerance: ±0.5mm Except Specified

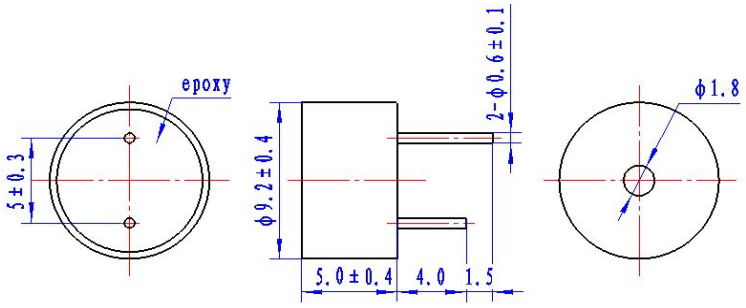

RoHS compliant


Φ9.0 x 5.0(h)mm

# BTK - 12P

| ORDERING CODE: | B T | K | – 12 | P |
|---|---|---|---|---|
| | ① | ② | ③ | ④ |

| | |
|---|---|
| ① | Magnetic Buzzer |
| ② | Series Number |
| ③ | Rated Voltage |
| ④ | None: Pin type, |

| NO | SPECIFICATION | DATA |
|---|---|---|
| 1 | Rated Voltage (V) | 12 |
| 2 | Operating Voltage (V) | 8~15 |
| 4 | Resonant Frequency (Hz) | 2700±300 |
| 5 | *Sound Output at 10cm (dB) | Min 80 |
| 6 | *Current Consumption (mA) | Max 30 |
| 7 | Operating Temperature (℃) | -20 ~ +70 |
| 8 | Storage Temperature (℃) | -30 ~ +80 |
| 9 | Weight (g) | 1g |
| 10 | Housing Material | ppo |
| 11 | RoHS | YES |
| 12 | Packing Quantity | 100pcs/box |

*Applying rated voltage (Resonant frequency, 1/2 duty, Square wave)

**DIENSIONS (unit : mm)**

Tolerance: ±0.5mm Except Specified