


# 1.5-A PEAK BOOST/BUCK/INVERTING SWITCHING REGULATORS

Check for Samples: [MC33063A](#), [MC34063A](#)


## FEATURES

- Wide Input Voltage Range: 3 V to 40 V
- **High Output Switch Current: Up to 1.5 A**
- Adjustable Output Voltage
- Oscillator Frequency Up to 100 kHz
- Precision Internal Reference: 2%
- Short-Circuit Current Limiting
- Low Standby Current

D (SOIC) OR P (PDIP) PACKAGE  
(TOP VIEW)

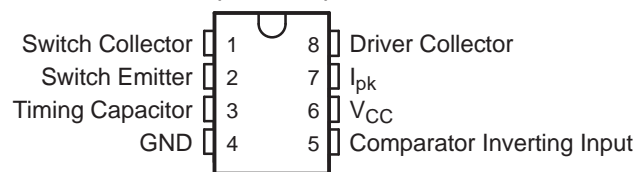

DRJ (QFN) PACKAGE  
(TOP VIEW)

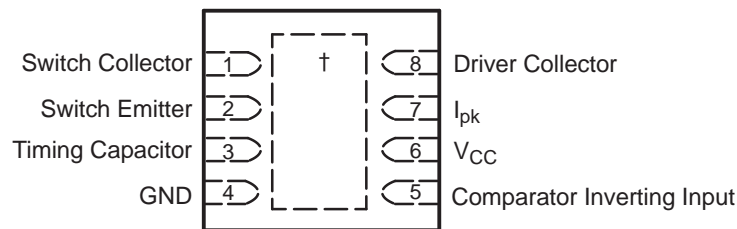

† The exposed thermal pad is electrically bonded internally to pin 4 (GND) .

## DESCRIPTION/ORDERING INFORMATION

The MC33063A and MC34063A are easy-to-use ICs containing all the primary circuitry needed for building simple dc-dc converters. These devices primarily consist of an internal temperature-compensated reference, a comparator, an oscillator, a PWM controller with active current limiting, a driver, and a high-current output switch. Thus, the devices require minimal external components to build converters in the boost, buck, and inverting topologies.

The MC33063A is characterized for operation from –40°C to 85°C, while the MC34063A is characterized for operation from 0°C to 70°C.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.


## ORDERING INFORMATION<sup>(1)</sup>

| T <sub>A</sub> | PACKAGE <sup>(2)</sup> |              | ORDERABLE PART NUMBER | TOP-SIDE MARKING |
|----------------|------------------------|--------------|-----------------------|------------------|
| –40°C to 85°C  | PDIP – P               | Tube of 50   | MC33063AP             | MC33063AP        |
|                | QFN – DRJ              | Reel of 1000 | MC33063ADRJR          | ZYF              |
|                | SOIC – D               | Tube of 75   | MC33063AD             | M33063A          |
|                |                        | Reel of 2500 | MC33063ADR            |                  |
| 0°C to 70°C    | PDIP – P               | Tube of 50   | MC34063AP             | MC34063AP        |
|                | QFN – DRJ              | Reel of 1000 | MC34063ADRJR          | ZYG              |
|                | SOIC – D               | Tube of 75   | MC34063AD             | M34063A          |
|                |                        | Reel of 2500 | MC34063ADR            |                  |

(1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI web site at [www.ti.com](http://www.ti.com).

(2) Package drawings, thermal data, and symbolization are available at [www.ti.com/packaging](http://www.ti.com/packaging).

## FUNCTIONAL BLOCK DIAGRAM

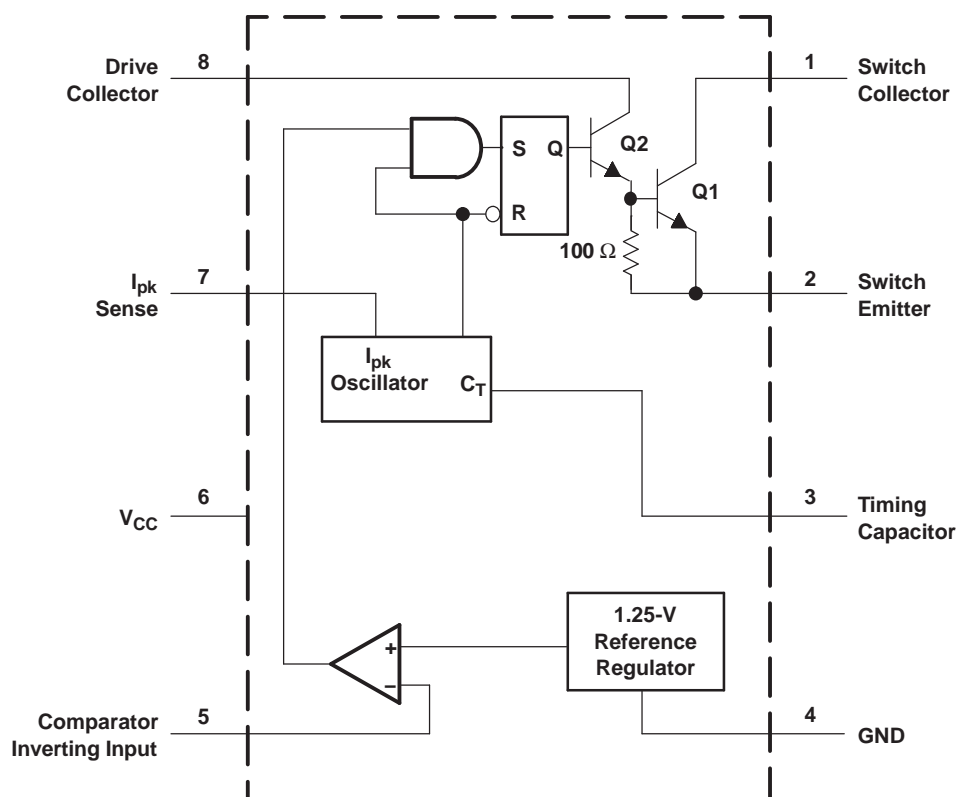

## Absolute Maximum Ratings<sup>(1)</sup>

over operating free-air temperature range (unless otherwise noted)

|                         |  | MIN                      | MAX | UNIT |
|-------------------------|--|--------------------------|-----|------|
| V <sub>CC</sub>         | Supply voltage                               |                          | 40  | V    |
| V <sub>IR</sub>         | Comparator Inverting Input voltage range     | –0.3                     | 40  | V    |
| V <sub>C(switch)</sub>  | Switch Collector voltage                     |                          | 40  | V    |
| V <sub>E(switch)</sub>  | Switch Emitter voltage                       | V <sub>PIN1</sub> = 40 V |     | 40 V |
| V <sub>CE(switch)</sub> | Switch Collector to Switch Emitter voltage   |                          | 40  | V    |
| V <sub>C(driver)</sub>  | Driver Collector voltage                     |                          | 40  | V    |
| I <sub>C(driver)</sub>  | Driver Collector current                     |                          | 100 | mA   |
| I <sub>SW</sub>         | Switch current                               |                          | 1.5 | A    |
| θ <sub>JA</sub>         | Package thermal impedance <sup>(2) (3)</sup> | D package                | 97  | °C/W |
|                         |  | DRJ package              | 41  |      |
|                         |  | P package                | 85  |      |
| T <sub>J</sub>          | Operating virtual junction temperature       |                          | 150 | °C   |
| T <sub>stg</sub>        | Storage temperature range                    | –65                      | 150 | °C   |

- (1) Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) Maximum power dissipation is a function of T<sub>J(max)</sub>, θ<sub>JA</sub>, and T<sub>A</sub>. The maximum allowable power dissipation at any allowable ambient temperature is P<sub>D</sub> = (T<sub>J(max)</sub> – T<sub>A</sub>)/θ<sub>JA</sub>. Operating at the absolute maximum T<sub>J</sub> of 150°C can affect reliability.
- (3) The package thermal impedance is calculated in accordance with JESD 51-7.

## Recommended Operating Conditions

|                 |                                |          | MIN | MAX | UNIT |
|-----------------|--------------------------------|----------|-----|-----|------|
| V <sub>CC</sub> | Supply voltage                 |          | 3   | 40  | V    |
| T <sub>A</sub>  | Operating free-air temperature | MC33063A | −40 | 85  | °C   |
|                 |                                | MC34063A | 0   | 70  |      |

## Electrical Characteristics

V<sub>CC</sub> = 5 V, T<sub>A</sub> = full operating range (unless otherwise noted) (see block diagram)

### Oscillator

| PARAMETER                             |                                   | TEST CONDITIONS                                | T <sub>A</sub> | MIN | TYP | MAX | UNIT |
|---------------------------------------|-----------------------------------|--|----------------|-----|-----|-----|------|
| f <sub>osc</sub>                      | Oscillator frequency              | V <sub>PIN5</sub> = 0 V, C <sub>T</sub> = 1 nF | 25°C           | 24  | 33  | 42  | kHz  |
| I <sub>chg</sub>                      | Charge current                    | V <sub>CC</sub> = 5 V to 40 V                  | 25°C           | 24  | 35  | 42  | μA   |
| I <sub>dischg</sub>                   | Discharge current                 | V <sub>CC</sub> = 5 V to 40 V                  | 25°C           | 140 | 220 | 260 | μA   |
| I <sub>dischg</sub> /I <sub>chg</sub> | Discharge-to-charge current ratio | V <sub>PIN7</sub> = V <sub>CC</sub>            | 25°C           | 5.2 | 6.5 | 7.5 |      |
| V <sub>lpk</sub>                      | Current-limit sense voltage       | I <sub>dischg</sub> = I <sub>chg</sub>         | 25°C           | 250 | 300 | 350 | mV   |

Output Switch<sup>(1)</sup>

| PARAMETER            | TEST CONDITIONS   | T <sub>A</sub> | MIN | TYP  | MAX | UNIT |
|----------------------|---|----------------|-----|------|-----|------|
| V <sub>CE(sat)</sub> | Saturation voltage – Darlington connection<br>I <sub>SW</sub> = 1 A, pins 1 and 8 connected   | Full range     |     | 1    | 1.3 | V    |
| V <sub>CE(sat)</sub> | Saturation voltage – non-Darlington connection <sup>(2)</sup><br>I <sub>SW</sub> = 1 A, R <sub>PIN8</sub> = 82 Ω to V <sub>CC</sub> , forced β ~ 20 | Full range     |     | 0.45 | 0.7 | V    |
| h <sub>FE</sub>      | DC current gain<br>I <sub>SW</sub> = 1 A, V <sub>CE</sub> = 5 V   | 25°C           | 50  | 75   |     |      |
| I <sub>C(off)</sub>  | Collector off-state current<br>V <sub>CE</sub> = 40 V   | Full range     |     | 0.01 | 100 | μA   |

(1) Low duty-cycle pulse testing is used to maintain junction temperature as close to ambient temperature as possible.

(2) In the non-Darlington configuration, if the output switch is driven into hard saturation at low switch currents (≤300 mA) and high driver currents (≥30 mA), it may take up to 2 μs for the switch to come out of saturation. This condition effectively shortens the off time at frequencies ≥30 kHz, becoming magnified as temperature increases. The following output drive condition is recommended in the non-Darlington configuration:

Forced β of output switch = I<sub>C,SW</sub> / (I<sub>C,driver</sub> – 7 mA) ≥ 10, where ~7 mA is required by the 100-Ω resistor in the emitter of the driver to forward bias the V<sub>be</sub> of the switch.

## Comparator

| PARAMETER        | TEST CONDITIONS  | T <sub>A</sub> | MIN   | TYP  | MAX   | UNIT |
|------------------|--|----------------|-------|------|-------|------|
| V <sub>th</sub>  | Threshold voltage  | 25°C           | 1.225 | 1.25 | 1.275 | V    |
|                  |  | Full range     | 1.21  |      | 1.29  |      |
| ΔV <sub>th</sub> | Threshold-voltage line regulation<br>V <sub>CC</sub> = 5 V to 40 V | Full range     |       | 1.4  | 5     | mV   |
| I <sub>IB</sub>  | Input bias current<br>V <sub>IN</sub> = 0 V                        | Full range     |       | –20  | –400  | nA   |

## Total Device

| PARAMETER       | TEST CONDITIONS  | T <sub>A</sub> | MIN | MAX | UNIT |
|-----------------|--|----------------|-----|-----|------|
| I <sub>CC</sub> | Supply current<br>V <sub>CC</sub> = 5 V to 40 V, C <sub>T</sub> = 1 nF,<br>V <sub>PIN7</sub> = V <sub>CC</sub> , V <sub>PIN5</sub> > V <sub>th</sub> ,<br>V <sub>PIN2</sub> = GND, All other pins open | Full range     |     | 4   | mA   |

## TYPICAL CHARACTERISTICS

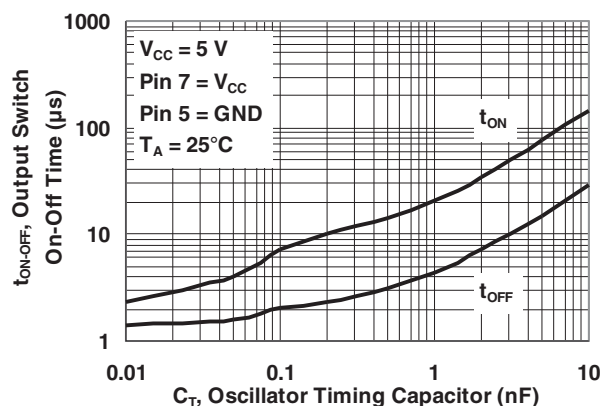


Figure 1. Output Switch On-Off Time vs Oscillator Timing Capacitor

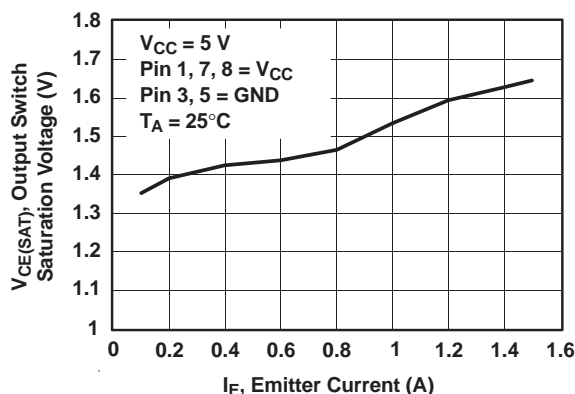


Figure 2. Output Switch Saturation Voltage vs Emitter Current (Emitter-Follower Configuration)

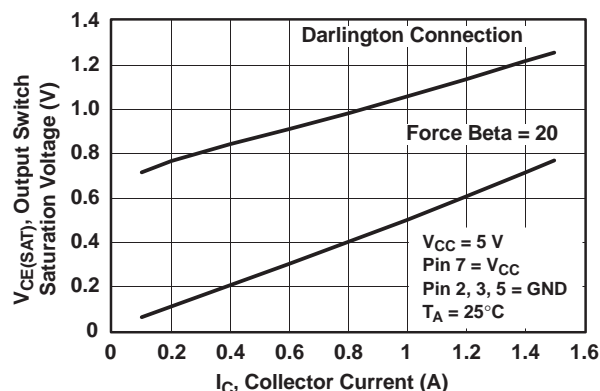


Figure 3. Output Switch Saturation Voltage vs Collector Current (Common-Emitter Configuration)

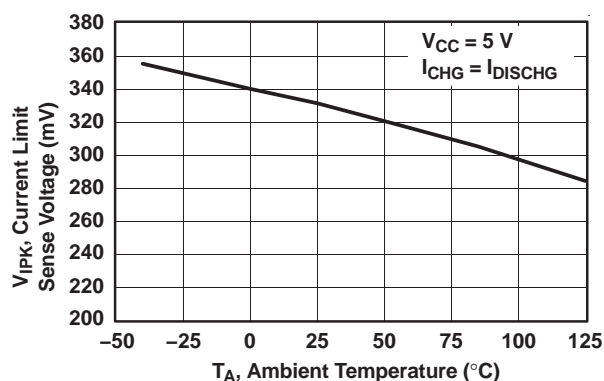


Figure 4. Current-Limit Sense Voltage vs Temperature

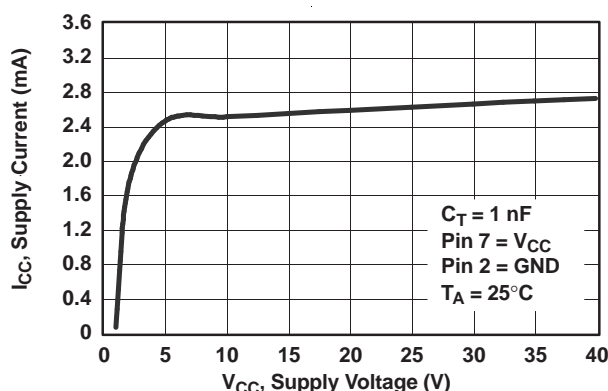


Figure 5. Standby Supply Current vs Supply Voltage

# TYPICAL CHARACTERISTICS (continued)


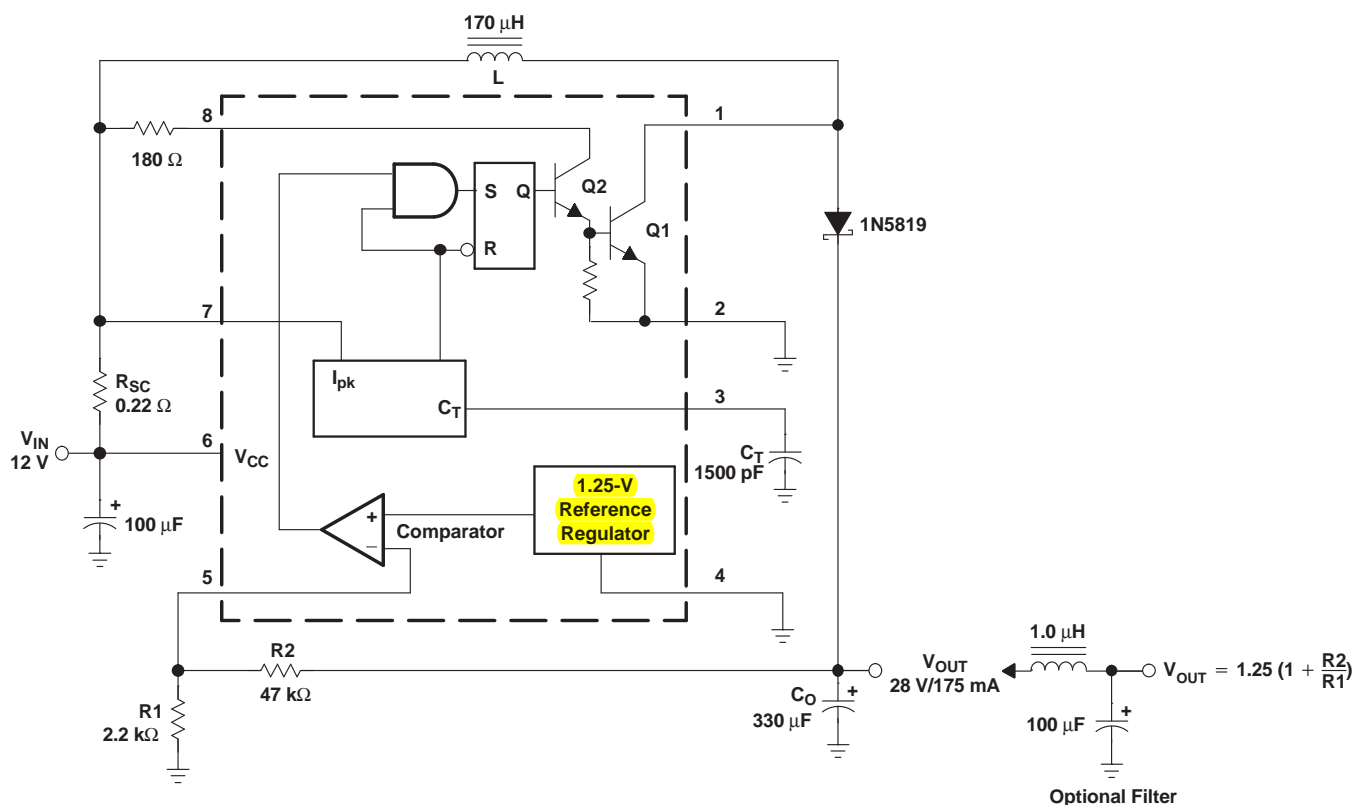


Figure 6. Step-Up Converter

| TEST                               | CONDITIONS                               | RESULTS              |
|------------------------------------|--|----------------------|
| Line regulation                    | $V_{IN} = 8V$ to $16V$ , $I_O = 175mA$   | 30 mV $\pm$ 0.05%    |
| Load regulation                    | $V_{IN} = 12V$ , $I_O = 75mA$ to $175mA$ | 10 mV $\pm$ 0.017%   |
| Output ripple                      | $V_{IN} = 12V$ , $I_O = 175mA$           | 400 mV <sub>PP</sub> |
| Efficiency                         | $V_{IN} = 12V$ , $I_O = 175mA$           | 87.7%                |
| Output ripple with optional filter | $V_{IN} = 12V$ , $I_O = 175mA$           | 40 mV <sub>PP</sub>  |

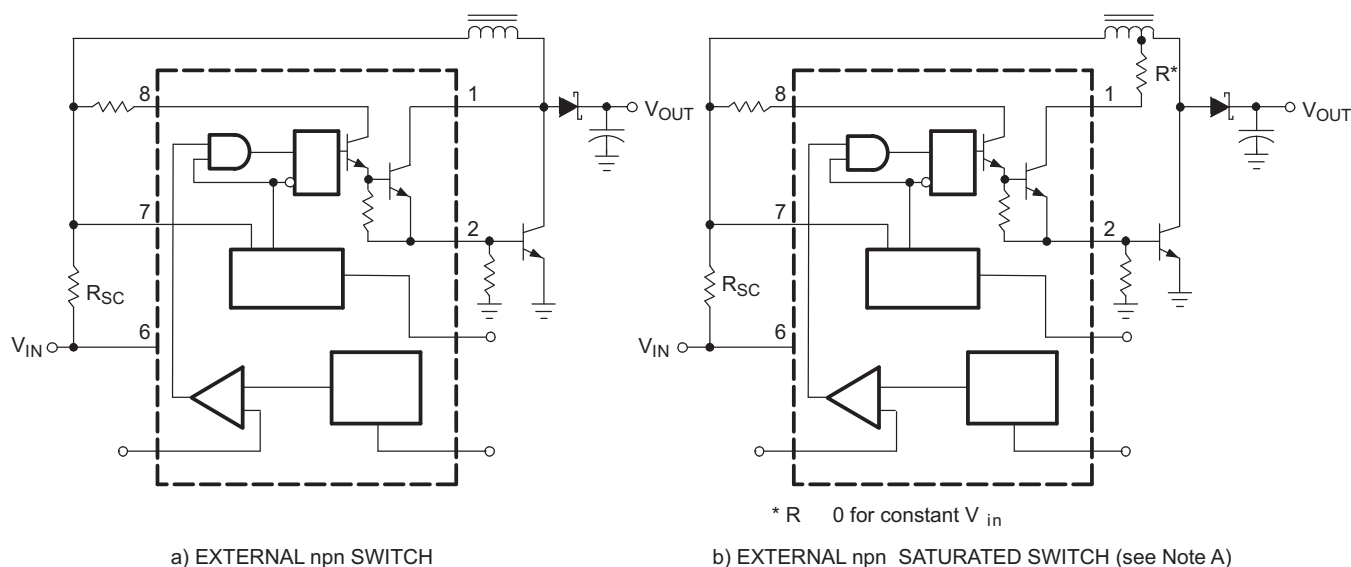

- A. If the output switch is driven into hard saturation (non-Darlington configuration) at low switch currents ( $\leq 300$  mA) and high driver currents ( $\geq 30$  mA), it may take up to  $2 \mu\text{s}$  to come out of saturation. This condition will shorten the off time at frequencies  $\geq 30$  kHz and is magnified at high temperatures. This condition does not occur with a Darlington configuration because the output switch cannot saturate. If a non-Darlington configuration is used, the output drive configuration in Figure 7b is recommended.

**Figure 7. External Current-Boost Connections for  $I_C$  Peak Greater Than 1.5 A**

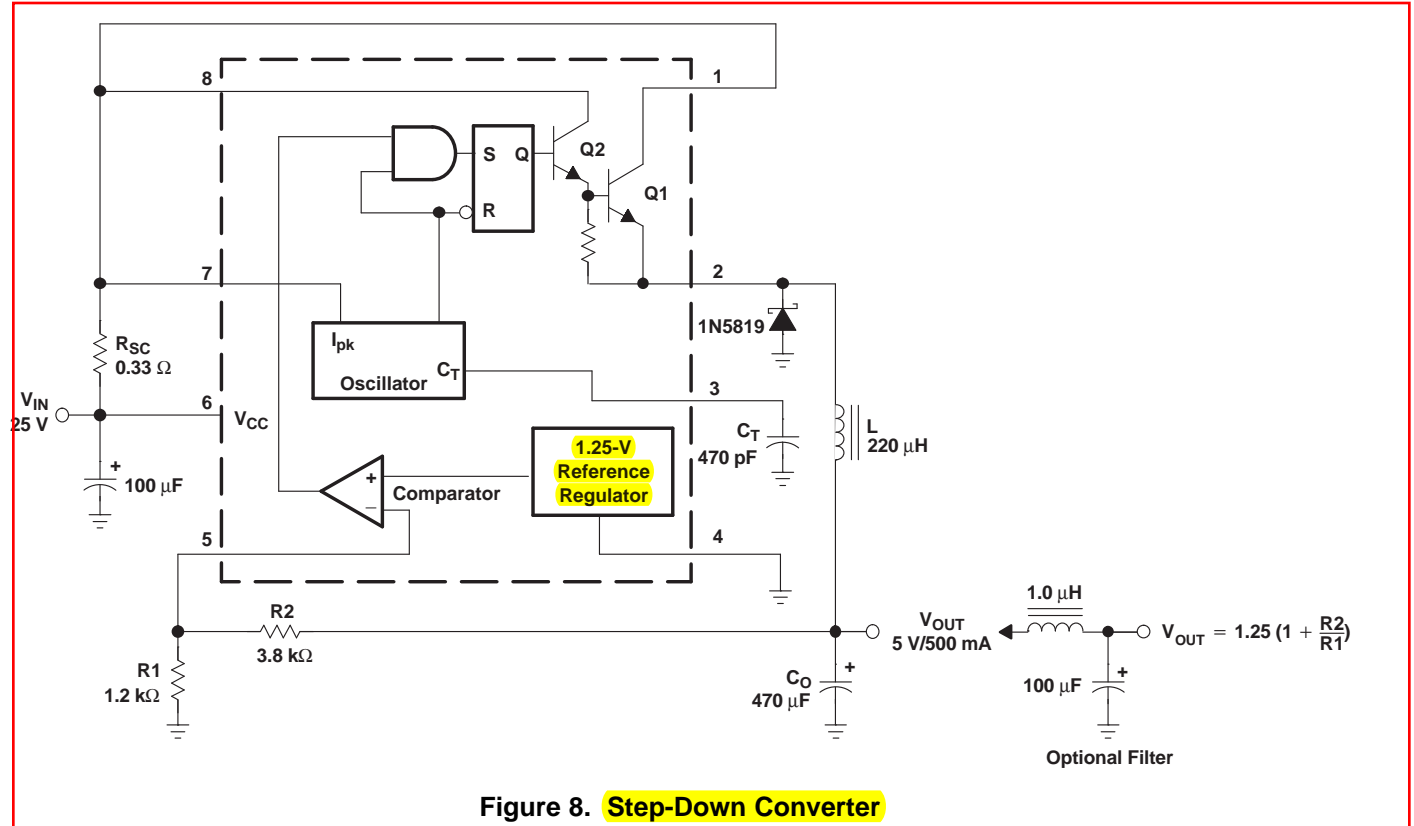


Figure 8. Step-Down Converter

| TEST                               | CONDITIONS   | RESULTS                    |
|------------------------------------|--|----------------------------|
| Line regulation                    | $V_{IN} = 15 \text{ V to } 25 \text{ V}$ , $I_O = 500 \text{ mA}$  | $12 \text{ mV} \pm 0.12\%$ |
| Load regulation                    | $V_{IN} = 25 \text{ V}$ , $I_O = 50 \text{ mA to } 500 \text{ mA}$ | $3 \text{ mV} \pm 0.03\%$  |
| Output ripple                      | $V_{IN} = 25 \text{ V}$ , $I_O = 500 \text{ mA}$                   | $120 \text{ mV}_{PP}$      |
| Short-circuit current              | $V_{IN} = 25 \text{ V}$ , $R_L = 0.1 \Omega$                       | $1.1 \text{ A}$            |
| Efficiency                         | $V_{IN} = 25 \text{ V}$ , $I_O = 500 \text{ mA}$                   | $83.7\%$                   |
| Output ripple with optional filter | $V_{IN} = 25 \text{ V}$ , $I_O = 500 \text{ mA}$                   | $40 \text{ mV}_{PP}$       |



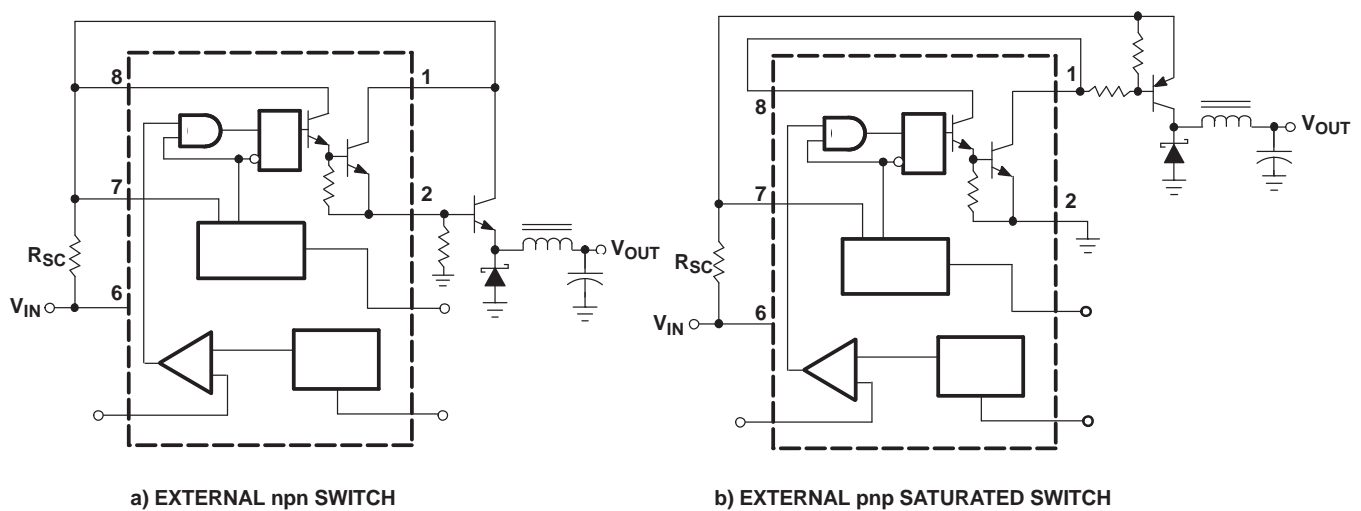


Figure 9. External Current-Boost Connections for  $I_C$  Peak Greater Than 1.5 A



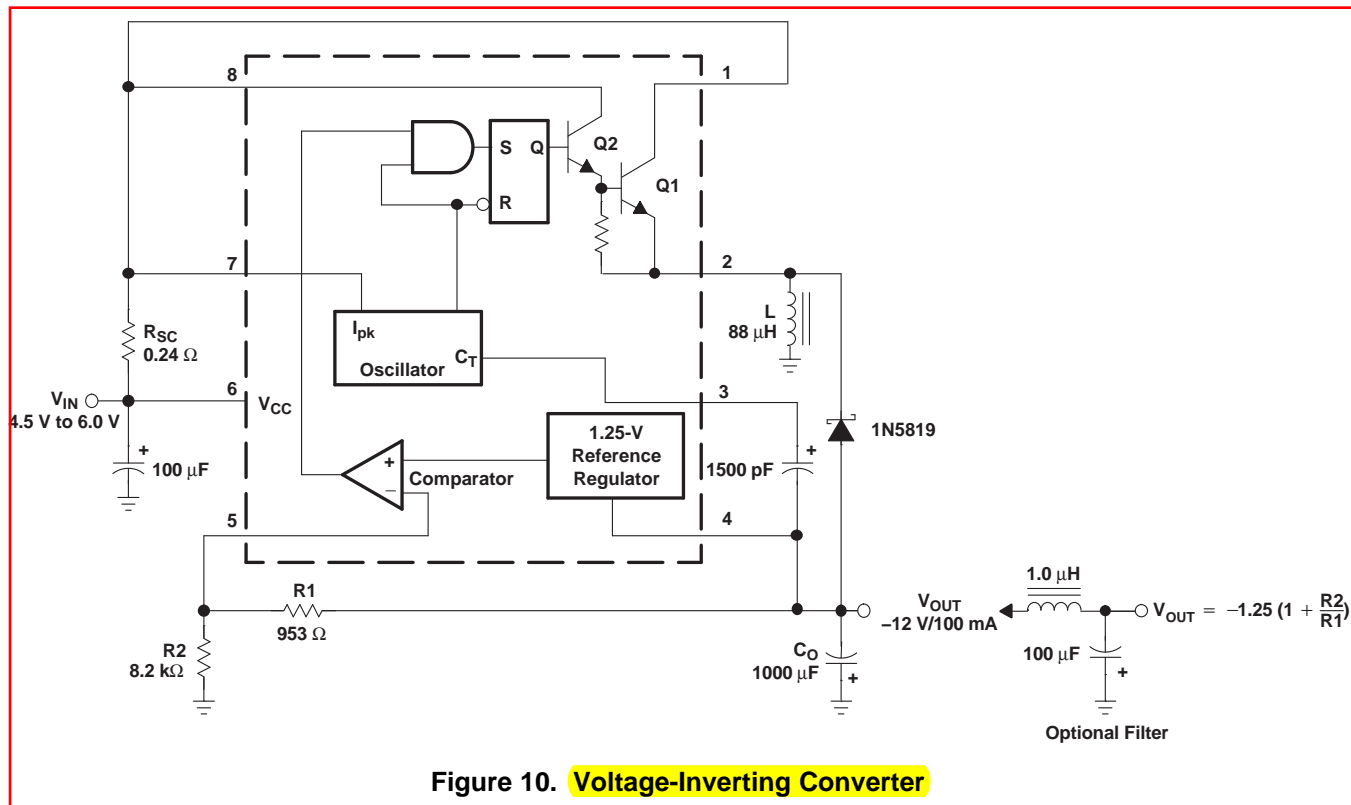

| TEST                               | CONDITIONS  | RESULTS                      |
|------------------------------------|---|------------------------------|
| Line regulation                    | $V_{IN} = 4.5 \text{ V to } 6 \text{ V}$ , $I_O = 100 \text{ mA}$ | $3 \text{ mV} \pm 0.12\%$    |
| Load regulation                    | $V_{IN} = 5 \text{ V}$ , $I_O = 10 \text{ mA to } 100 \text{ mA}$ | $0.022 \text{ V} \pm 0.09\%$ |
| Output ripple                      | $V_{IN} = 5 \text{ V}$ , $I_O = 100 \text{ mA}$                   | $500 \text{ mV}_{PP}$        |
| Short-circuit current              | $V_{IN} = 5 \text{ V}$ , $R_L = 0.1 \Omega$                       | $910 \text{ mA}$             |
| Efficiency                         | $V_{IN} = 5 \text{ V}$ , $I_O = 100 \text{ mA}$                   | $62.2\%$                     |
| Output ripple with optional filter | $V_{IN} = 5 \text{ V}$ , $I_O = 100 \text{ mA}$                   | $70 \text{ mV}_{PP}$         |

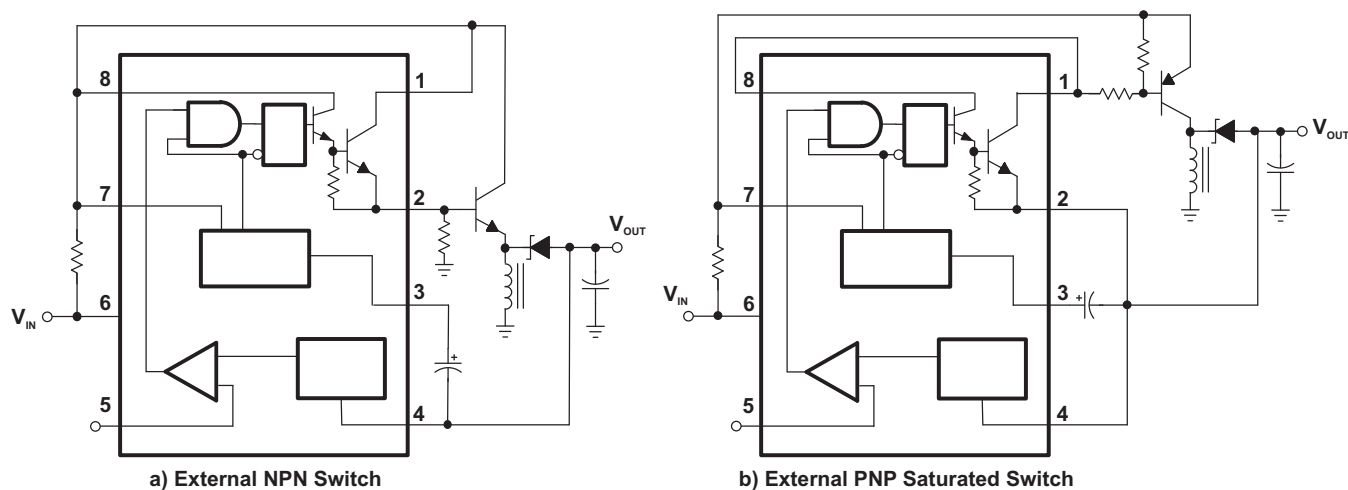

## APPLICATION INFORMATION

| CALCULATION          | STEP UP   | STEP DOWN   | VOLTAGE INVERTING   |
|----------------------|---|---|---|
| $t_{on}/t_{off}$     | $\frac{V_{out} + V_F - V_{in(min)}}{V_{in(min)} - V_{sat}}$                 | $\frac{V_{out} + V_F}{V_{in(min)} - V_{sat} - V_{out}}$                               | $\frac{ V_{out}  + V_F}{V_{in} - V_{sat}}$                                  |
| $(t_{on} + t_{off})$ | $\frac{1}{f}$   | $\frac{1}{f}$   | $\frac{1}{f}$   |
| $t_{off}$            | $\frac{t_{on} + t_{off}}{\frac{t_{on}}{t_{off}} + 1}$                       | $\frac{t_{on} + t_{off}}{\frac{t_{on}}{t_{off}} + 1}$                                 | $\frac{t_{on} + t_{off}}{\frac{t_{on}}{t_{off}} + 1}$                       |
| $t_{on}$             | $(t_{on} + t_{off}) - t_{off}$  | $(t_{on} + t_{off}) - t_{off}$  | $(t_{on} + t_{off}) - t_{off}$  |
| $C_T$                | $4 \times 10^{-5} t_{on}$   | $4 \times 10^{-5} t_{on}$   | $4 \times 10^{-5} t_{on}$   |
| $I_{pk(switch)}$     | $2I_{out(max)} \left( \frac{t_{on}}{t_{off}} + 1 \right)$                   | $2I_{out(max)}$   | $2I_{out(max)} \left( \frac{t_{on}}{t_{off}} + 1 \right)$                   |
| $R_{SC}$             | $\frac{0.3}{I_{pk(switch)}}$  | $\frac{0.3}{I_{pk(switch)}}$  | $\frac{0.3}{I_{pk(switch)}}$  |
| $L_{(min)}$          | $\left( \frac{(V_{in(min)} - V_{sat})}{I_{pk(switch)}} \right) t_{on(max)}$ | $\left( \frac{(V_{in(min)} - V_{sat} - V_{out})}{I_{pk(switch)}} \right) t_{on(max)}$ | $\left( \frac{(V_{in(min)} - V_{sat})}{I_{pk(switch)}} \right) t_{on(max)}$ |
| $C_O$                | $9 \frac{I_{out} t_{on}}{V_{ripple(pp)}}$                                   | $\frac{I_{pk(switch)}(t_{on} + t_{off})}{8V_{ripple(pp)}}$                            | $9 \frac{I_{out} t_{on}}{V_{ripple(pp)}}$                                   |
| $V_{out}$            | $1.25(1 + \frac{R_2}{R_1})$<br>See Figure 6                                 | $1.25(1 + \frac{R_2}{R_1})$<br>See Figure 8   | $-1.25(1 + \frac{R_2}{R_1})$<br>See Figure 10                               |

$V_{sat}$  = Saturation voltage of the output switch

$V_F$  = Forward voltage drop of the chosen output rectifier

The following power-supply parameters are set by the user:

$V_{in}$  = Nominal input voltage

$V_{out}$  = Desired output voltage

$I_{out}$  = Desired output current

$f_{min}$  = Minimum desired output switching frequency at the selected values of  $V_{in}$  and  $I_{out}$

$V_{ripple}$  = Desired peak-to-peak output ripple voltage. The ripple voltage directly affects the line and load regulation and, thus, must be considered. In practice, the actual capacitor value should be larger than the calculated value, to account for the capacitor's equivalent series resistance and board layout.

## REVISION HISTORY

| Changes from Revision L (December 2009) to Revision M | Page              |
|---|-------------------|
| • Changed pnp to npn for figure 7b, text typo. ....   | <a href="#">7</a> |
| • Changed figure 11b schematic. ....                  | <a href="#">9</a> |

**PACKAGING INFORMATION**

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2)            | Lead/Ball Finish<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|----------------------------|-------------------------|----------------------|--------------|-------------------------|-------------------------|
| MC33063AD        | ACTIVE        | SOIC         | D                  | 8    | 75             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | -40 to 85    | M33063A                 | <a href="#">Samples</a> |
| MC33063ADE4      | ACTIVE        | SOIC         | D                  | 8    | 75             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | -40 to 85    | M33063A                 | <a href="#">Samples</a> |
| MC33063ADG4      | ACTIVE        | SOIC         | D                  | 8    | 75             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | -40 to 85    | M33063A                 | <a href="#">Samples</a> |
| MC33063ADR       | ACTIVE        | SOIC         | D                  | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | -40 to 85    | M33063A                 | <a href="#">Samples</a> |
| MC33063ADRE4     | ACTIVE        | SOIC         | D                  | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | -40 to 85    | M33063A                 | <a href="#">Samples</a> |
| MC33063ADRG4     | ACTIVE        | SOIC         | D                  | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | -40 to 85    | M33063A                 | <a href="#">Samples</a> |
| MC33063ADRJR     | ACTIVE        | SON          | DRJ                | 8    | 1000           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-3-260C-168 HR  | -40 to 85    | ZYF                     | <a href="#">Samples</a> |
| MC33063ADRJRG4   | ACTIVE        | SON          | DRJ                | 8    | 1000           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-3-260C-168 HR  | -40 to 85    | ZYF                     | <a href="#">Samples</a> |
| MC33063AP        | ACTIVE        | PDIP         | P                  | 8    | 50             | Pb-Free<br>(RoHS)          | CU NIPDAU               | N / A for Pkg Type   | -40 to 85    | MC33063AP               | <a href="#">Samples</a> |
| MC33063AP-P      | PREVIEW       | PDIP         | P                  | 8    | 50             | TBD                        | Call TI                 | Call TI              | -40 to 85    | MC33063AP               |                         |
| MC33063APE4      | ACTIVE        | PDIP         | P                  | 8    | 50             | Pb-Free<br>(RoHS)          | CU NIPDAU               | N / A for Pkg Type   | -40 to 85    | MC33063AP               | <a href="#">Samples</a> |
| MC34063AD        | ACTIVE        | SOIC         | D                  | 8    | 75             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | 0 to 70      | M34063A                 | <a href="#">Samples</a> |
| MC34063ADE4      | ACTIVE        | SOIC         | D                  | 8    | 75             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | 0 to 70      | M34063A                 | <a href="#">Samples</a> |
| MC34063ADG4      | ACTIVE        | SOIC         | D                  | 8    | 75             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | 0 to 70      | M34063A                 | <a href="#">Samples</a> |
| MC34063ADR       | ACTIVE        | SOIC         | D                  | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | 0 to 70      | M34063A                 | <a href="#">Samples</a> |
| MC34063ADRE4     | ACTIVE        | SOIC         | D                  | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | 0 to 70      | M34063A                 | <a href="#">Samples</a> |
| MC34063ADRG4     | ACTIVE        | SOIC         | D                  | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | 0 to 70      | M34063A                 | <a href="#">Samples</a> |

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2)            | Lead/Ball Finish<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|----------------------------|-------------------------|----------------------|--------------|-------------------------|-------------------------|
| MC34063ADRJR     | ACTIVE        | SON          | DRJ                | 8    | 1000           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-3-260C-168 HR  | 0 to 70      | ZYF                     | <a href="#">Samples</a> |
| MC34063ADRJRG4   | ACTIVE        | SON          | DRJ                | 8    | 1000           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU               | Level-3-260C-168 HR  | 0 to 70      | ZYF                     | <a href="#">Samples</a> |
| MC34063AP        | ACTIVE        | PDIP         | P                  | 8    | 50             | Pb-Free<br>(RoHS)          | CU NIPDAU               | N / A for Pkg Type   | 0 to 70      | MC34063AP               | <a href="#">Samples</a> |
| MC34063APE4      | ACTIVE        | PDIP         | P                  | 8    | 50             | Pb-Free<br>(RoHS)          | CU NIPDAU               | N / A for Pkg Type   | 0 to 70      | MC34063AP               | <a href="#">Samples</a> |

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBsolete:** TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and

continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.



In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**OTHER QUALIFIED VERSIONS OF MC33063A :**

- Automotive: [MC33063A-Q1](#)

NOTE: Qualified Version Definitions:

- Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects

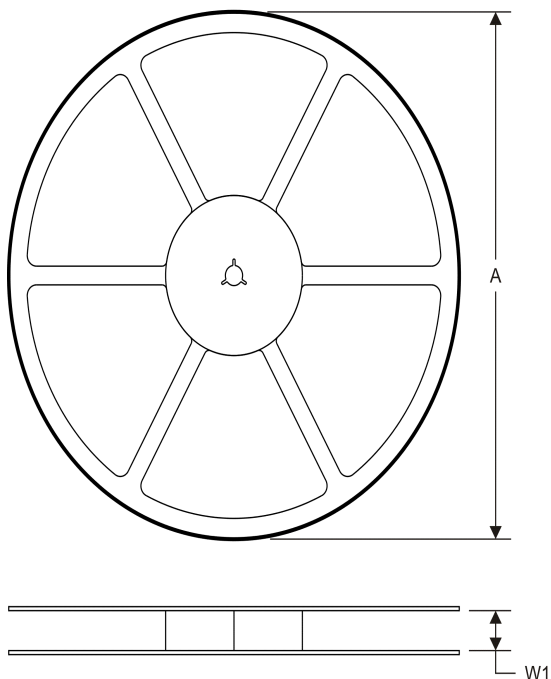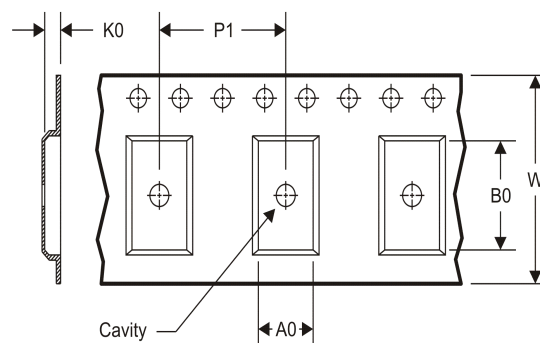**TAPE AND REEL INFORMATION**
**REEL DIMENSIONS**

**TAPE DIMENSIONS**


|    |   |
|----|---|
| A0 | Dimension designed to accommodate the component width     |
| B0 | Dimension designed to accommodate the component length    |
| K0 | Dimension designed to accommodate the component thickness |
| W  | Overall width of the carrier tape                         |
| P1 | Pitch between successive cavity centers                   |

**TAPE AND REEL INFORMATION**

\*All dimensions are nominal

| Device       | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| MC33063ADR   | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| MC33063ADRJR | SON          | DRJ             | 8    | 1000 | 330.0              | 12.4               | 4.25    | 4.25    | 1.15    | 8.0     | 12.0   | Q2            |
| MC34063ADR   | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| MC34063ADRJR | SON          | DRJ             | 8    | 1000 | 180.0              | 12.4               | 4.25    | 4.25    | 1.15    | 8.0     | 12.0   | Q2            |

## TAPE AND REEL BOX DIMENSIONS



\*All dimensions are nominal

| Device       | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|--------------|--------------|-----------------|------|------|-------------|------------|-------------|
| MC33063ADR   | SOIC         | D               | 8    | 2500 | 340.5       | 338.1      | 20.6        |
| MC33063ADRJR | SON          | DRJ             | 8    | 1000 | 367.0       | 367.0      | 35.0        |
| MC34063ADR   | SOIC         | D               | 8    | 2500 | 340.5       | 338.1      | 20.6        |
| MC34063ADRJR | SON          | DRJ             | 8    | 1000 | 210.0       | 185.0      | 35.0        |



P (R-PDIP-T8)


PLASTIC DUAL-IN-LINE PACKAGE



- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. Falls within JEDEC MS-001 variation BA.

DRJ (S-PWSON-N8)

PLASTIC SMALL OUTLINE NO-LEAD

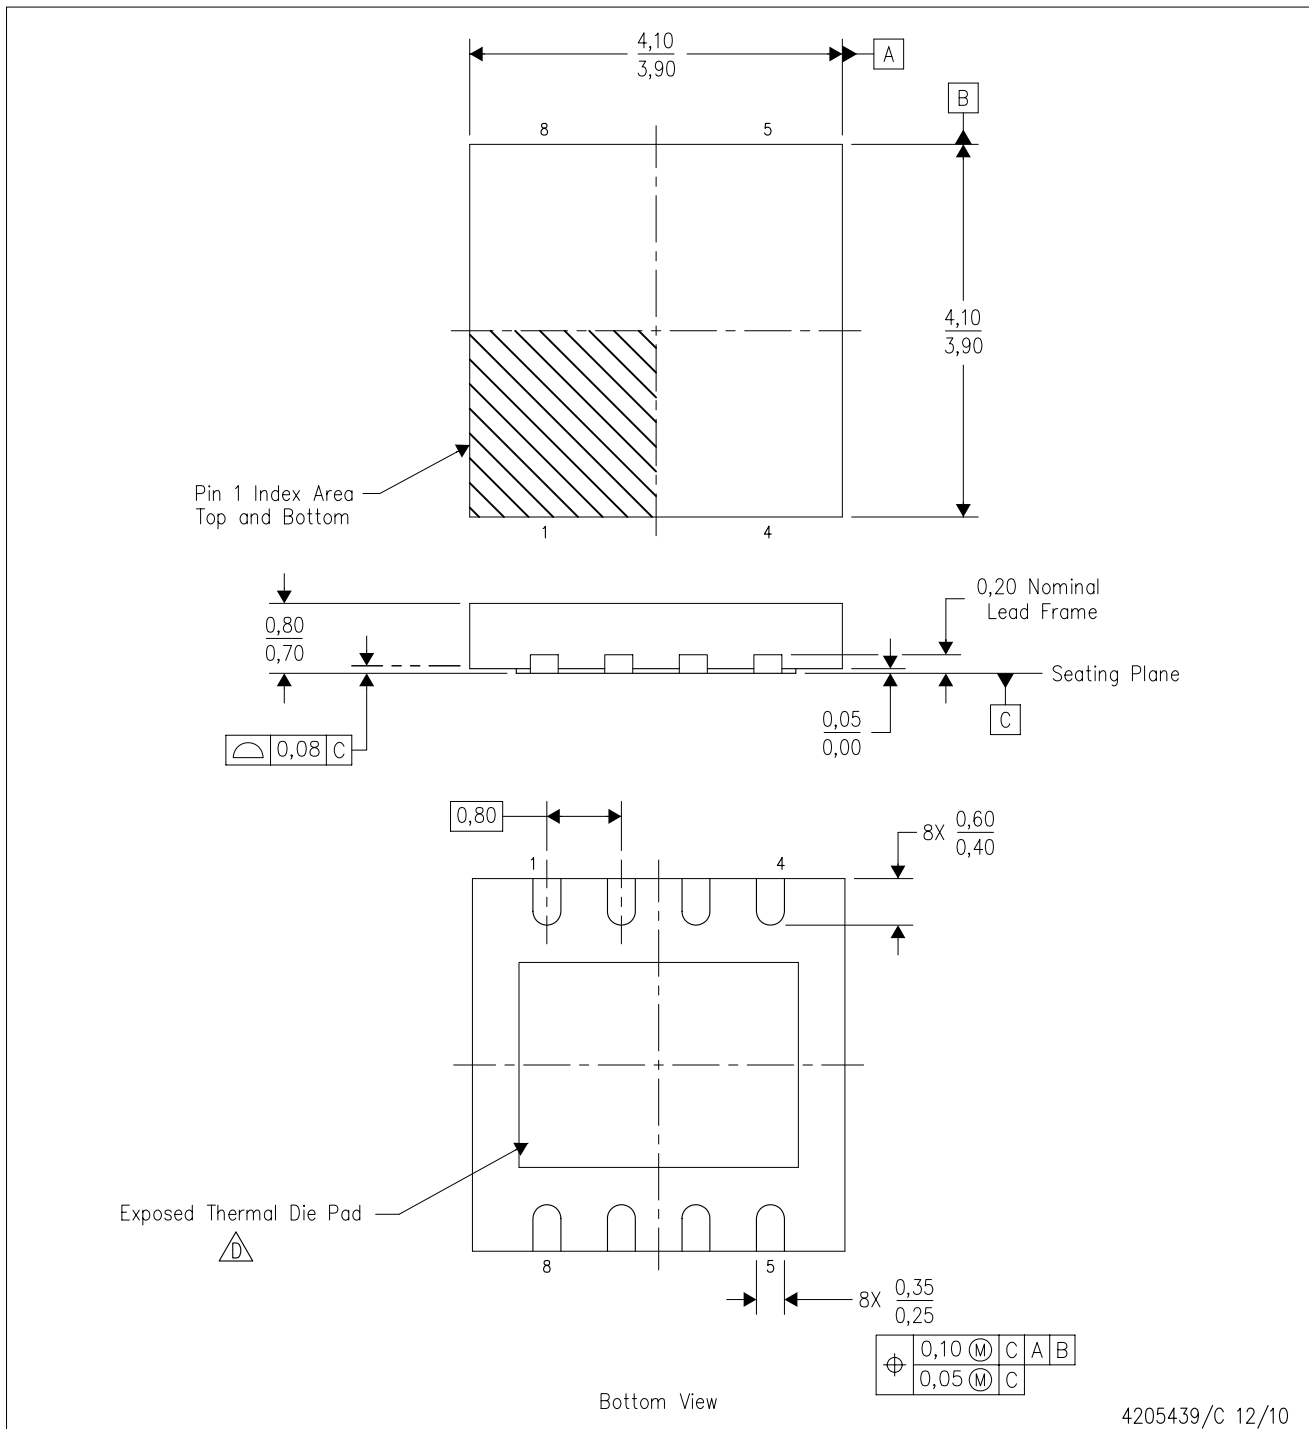

4205439/C 12/10


- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
  - B. This drawing is subject to change without notice.
  - C. SON (Small Outline No-Lead) package configuration.
  - The package thermal pad must be soldered to the board for thermal and mechanical performance. See the Product Data Sheet for details regarding the exposed thermal pad dimensions.
  - E. Package complies to JEDEC MO-229 variation WGGB.

### THERMAL INFORMATION

This package incorporates an exposed thermal pad that is designed to be attached directly to an external heatsink. The thermal pad must be soldered directly to the printed circuit board (PCB). After soldering, the PCB can be used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to the appropriate copper plane shown in the electrical schematic for the device, or alternatively, can be attached to a special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For information on the Quad Flatpack No-Lead (QFN) package and its advantages, refer to Application Report, QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271. This document is available at [www.ti.com](http://www.ti.com).

The exposed thermal pad dimensions for this package are shown in the following illustration.

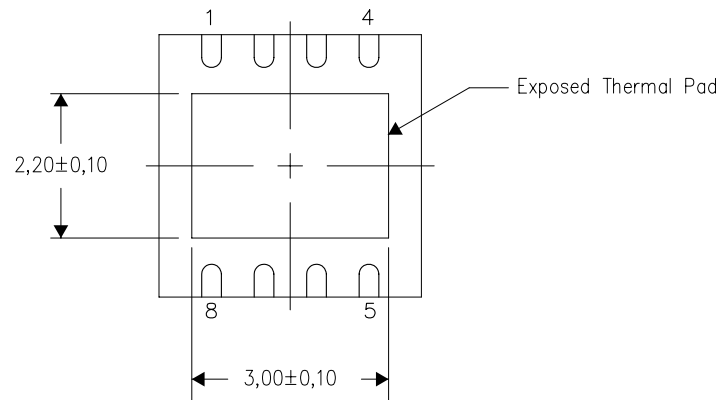

Bottom View


Exposed Thermal Pad Dimensions

4206882/F 01/11

NOTE: All linear dimensions are in millimeters

DRJ (S-PWSON-N8)

SMALL PACKAGE OUTLINE NO-LEAD

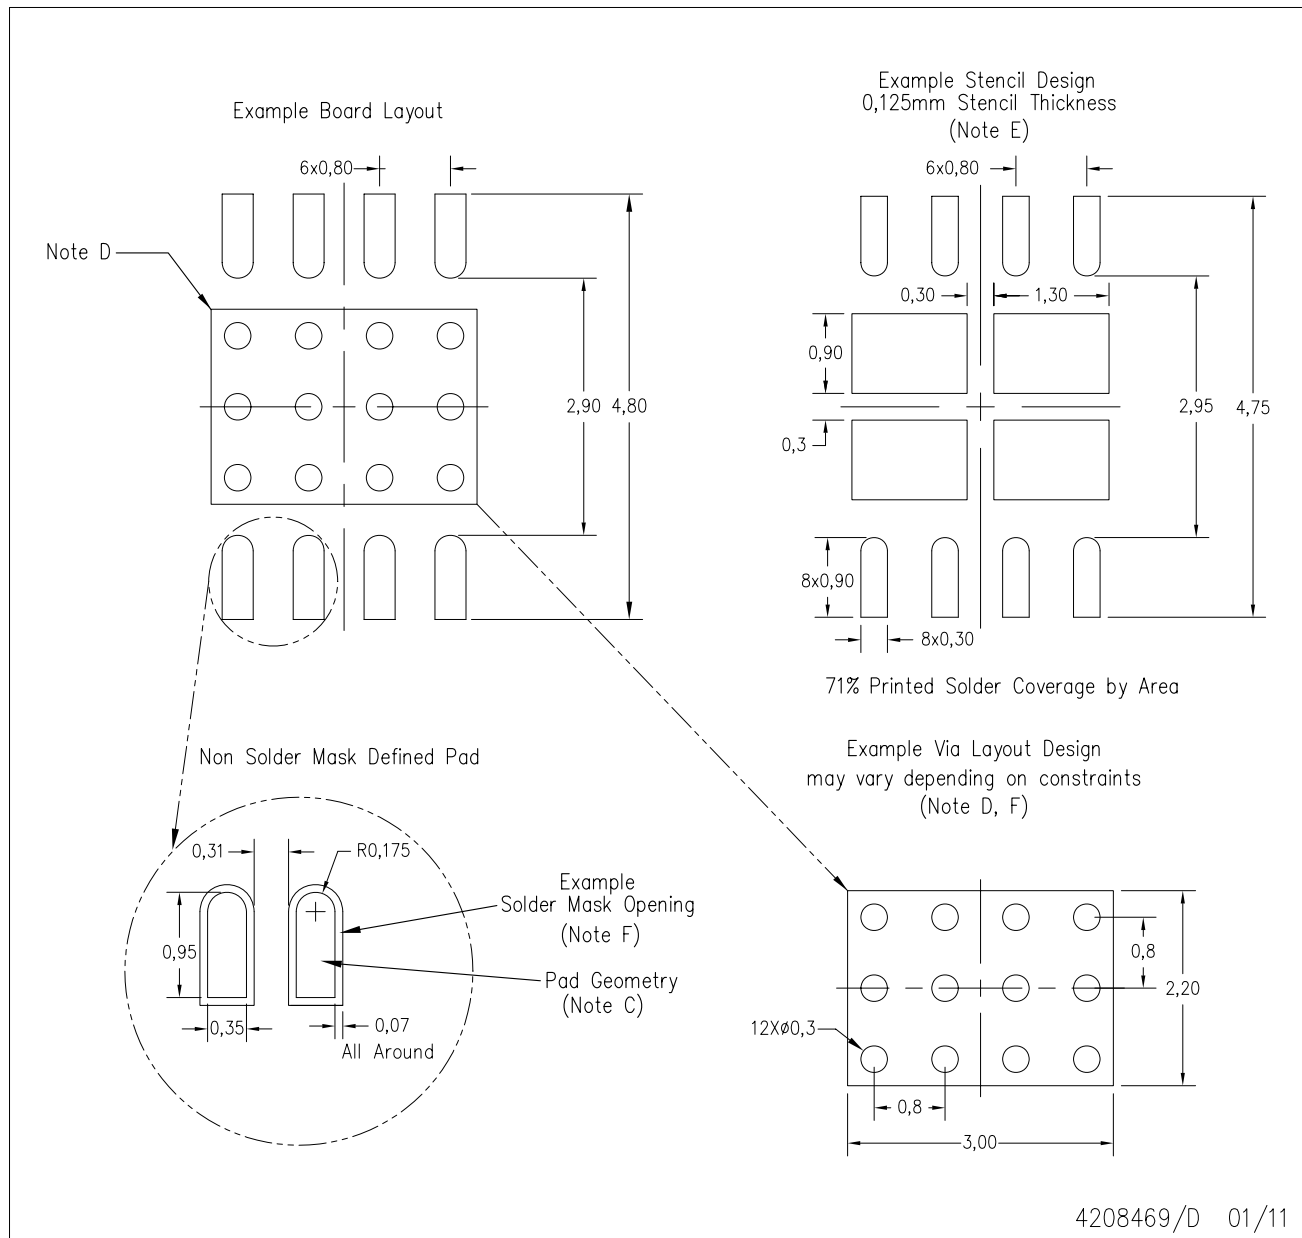

- NOTES:
- All linear dimensions are in millimeters.
  - This drawing is subject to change without notice.
  - Publication IPC-7351 is recommended for alternate designs.
  - This package is designed to be soldered to a thermal pad on the board. Refer to Application Note, Quad Flat-Pack Packages, Texas Instruments Literature No. SLUA271, and also the Product Data Sheets for specific thermal information, via requirements, and recommended board layout. These documents are available at [www.ti.com](http://www.ti.com) <<http://www.ti.com>>.
  - Laser cutting apertures with electropolish and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC 7525 for stencil design considerations.
  - Customers should contact their board fabrication site for solder mask tolerances and vias tenting recommendations for vias placed in the thermal pad.

D (R-PDSO-G8)

PLASTIC SMALL OUTLINE



## NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- $\triangle C$  Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
- $\triangle D$  Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
- E. Reference JEDEC MS-012 variation AA.

D (R-PDSO-G8)

PLASTIC SMALL OUTLINE



4211283-2/E 08/12

- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Publication IPC-7351 is recommended for alternate designs.
  - D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
  - E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

### Products

|                              |  |
|------------------------------|--|
| Audio                        | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                               |
| Amplifiers                   | <a href="http://amplifier.ti.com">amplifier.ti.com</a>                               |
| Data Converters              | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>                       |
| DLP® Products                | <a href="http://www.dlp.com">www.dlp.com</a>   |
| DSP                          | <a href="http://dsp.ti.com">dsp.ti.com</a>   |
| Clocks and Timers            | <a href="http://www.ti.com/clocks">www.ti.com/clocks</a>                             |
| Interface                    | <a href="http://interface.ti.com">interface.ti.com</a>                               |
| Logic                        | <a href="http://logic.ti.com">logic.ti.com</a>                                       |
| Power Mgmt                   | <a href="http://power.ti.com">power.ti.com</a>                                       |
| Microcontrollers             | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a>                   |
| RFID                         | <a href="http://www.ti-rfid.com">www.ti-rfid.com</a>                                 |
| OMAP Applications Processors | <a href="http://www.ti.com/omap">www.ti.com/omap</a>                                 |
| Wireless Connectivity        | <a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a> |

### Applications

|                               |  |
|-------------------------------|--|
| Automotive and Transportation | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>                         |
| Communications and Telecom    | <a href="http://www.ti.com/communications">www.ti.com/communications</a>                 |
| Computers and Peripherals     | <a href="http://www.ti.com/computers">www.ti.com/computers</a>                           |
| Consumer Electronics          | <a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>                   |
| Energy and Lighting           | <a href="http://www.ti.com/energy">www.ti.com/energy</a>                                 |
| Industrial                    | <a href="http://www.ti.com/industrial">www.ti.com/industrial</a>                         |
| Medical                       | <a href="http://www.ti.com/medical">www.ti.com/medical</a>                               |
| Security                      | <a href="http://www.ti.com/security">www.ti.com/security</a>                             |
| Space, Avionics and Defense   | <a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a> |
| Video and Imaging             | <a href="http://www.ti.com/video">www.ti.com/video</a>                                   |

### TI E2E Community

[e2e.ti.com](http://e2e.ti.com)