




SIGNAL FLOW USB INPUT > ISOLATION > XMOS / I2S > DAC > ANALOG FILTER / LINE OUTPUT

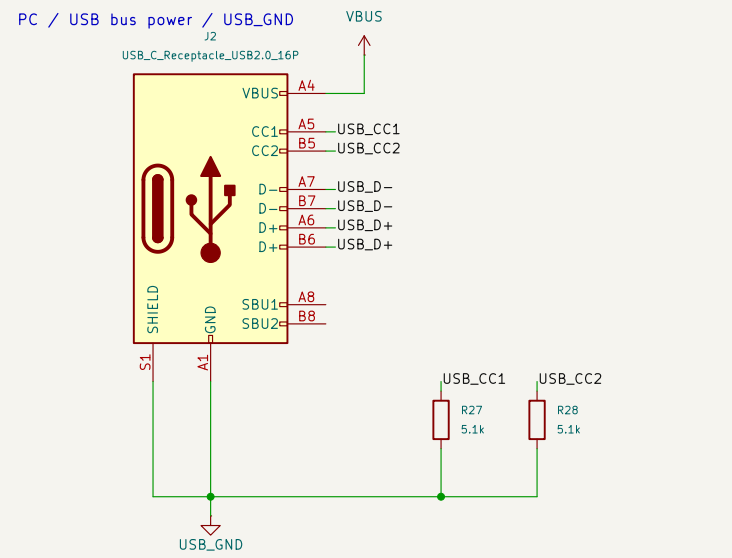

USB signals connect by matching net labels.




ISOUSB211 | USB_GND <-> main GND

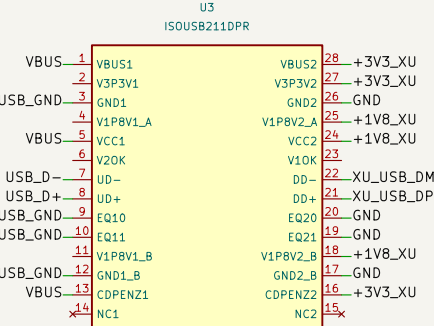

Isolation domains are retained

XU316 | I2S / QSPI boot / clock / debug

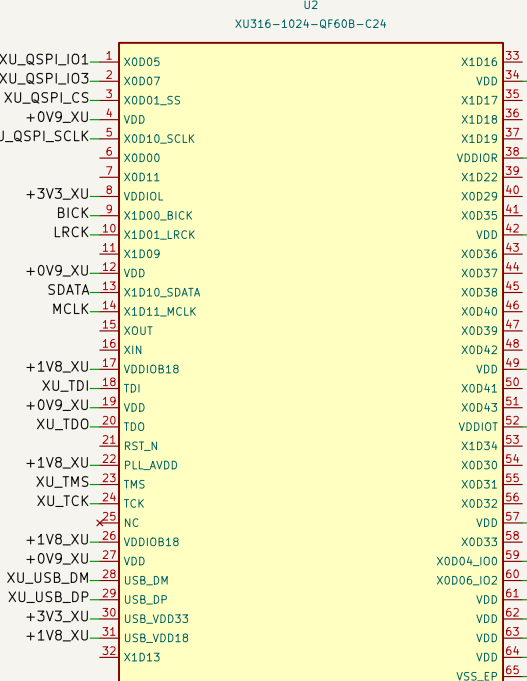

125 GPIO assignments are provisional.


W25Q32JVSSIQ

Pin	Signal	Pin	Signal
1	CS#	8	+3V3_XU
2	DQ_J01 HCLKD#_IO3	7	XU_QSPI_L
3	WP#_J02	6	XU_QSPI_S
4	GND	5	XU_QSPI_L


Diagram showing the connection of pins 1 to 5 of the JTAG_DEBUG header:

- PIN 1: XU_TDI
- PIN 2: XU_TDO
- PIN 3: XU_TMS
- PIN 4: XU_TCK
- PIN 5: GND


AK4490 | digital control / analog reference

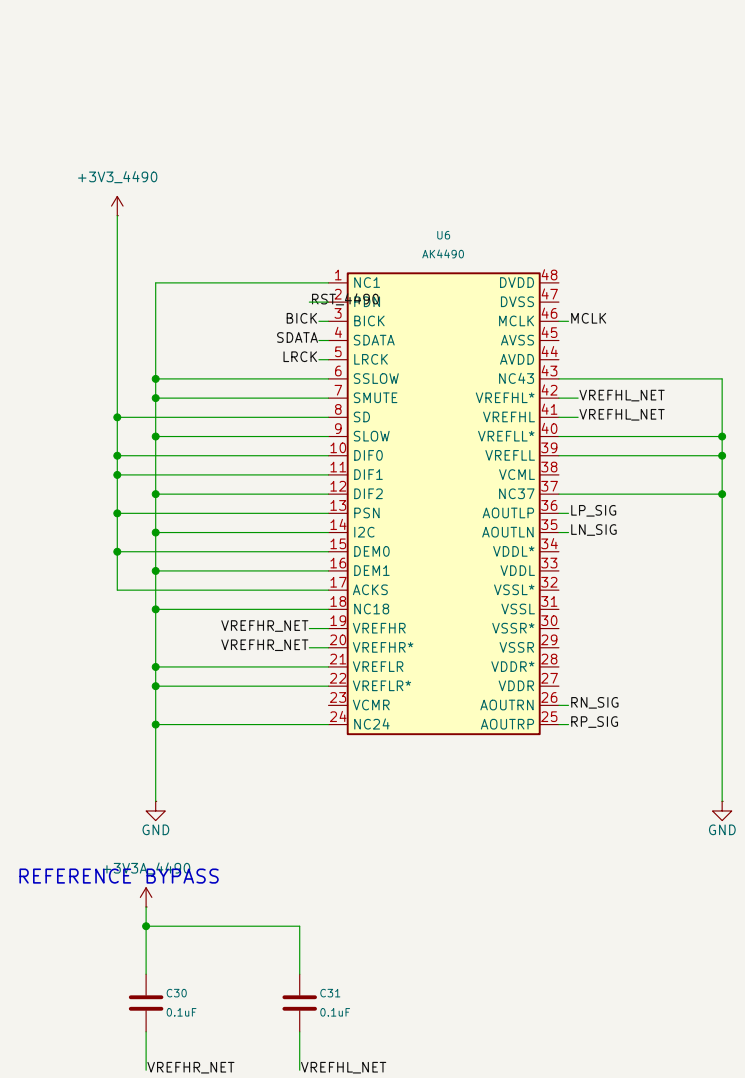


Differential input > filter / MUSES8920 > LINE_OUT_L

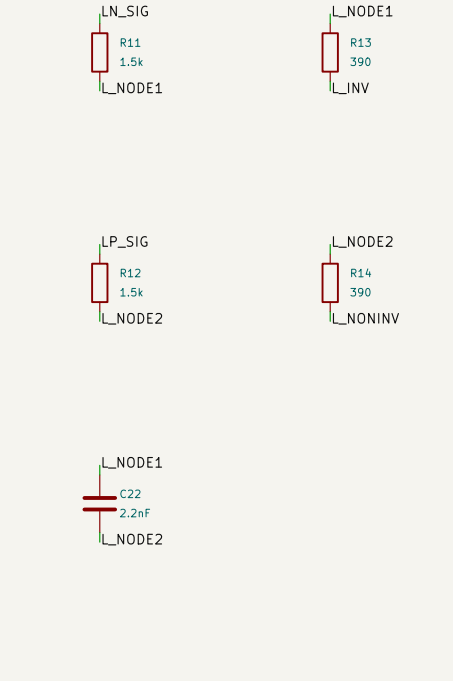


Differential Input > filter / MUSES8920 > LINE_OUT_1

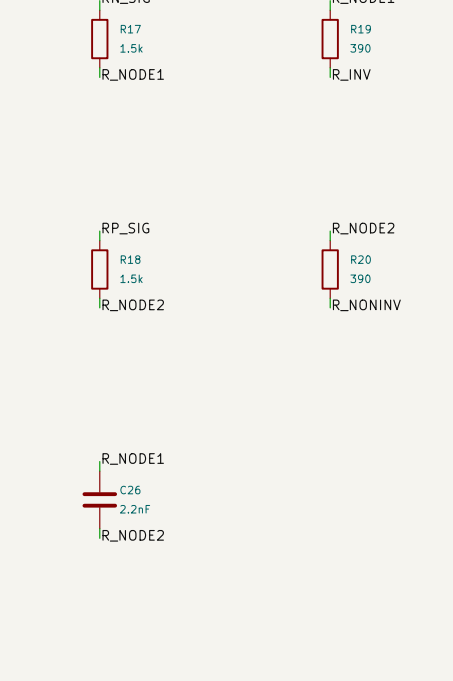

DC input / digital rails / DAC rails / analog ± 15 V

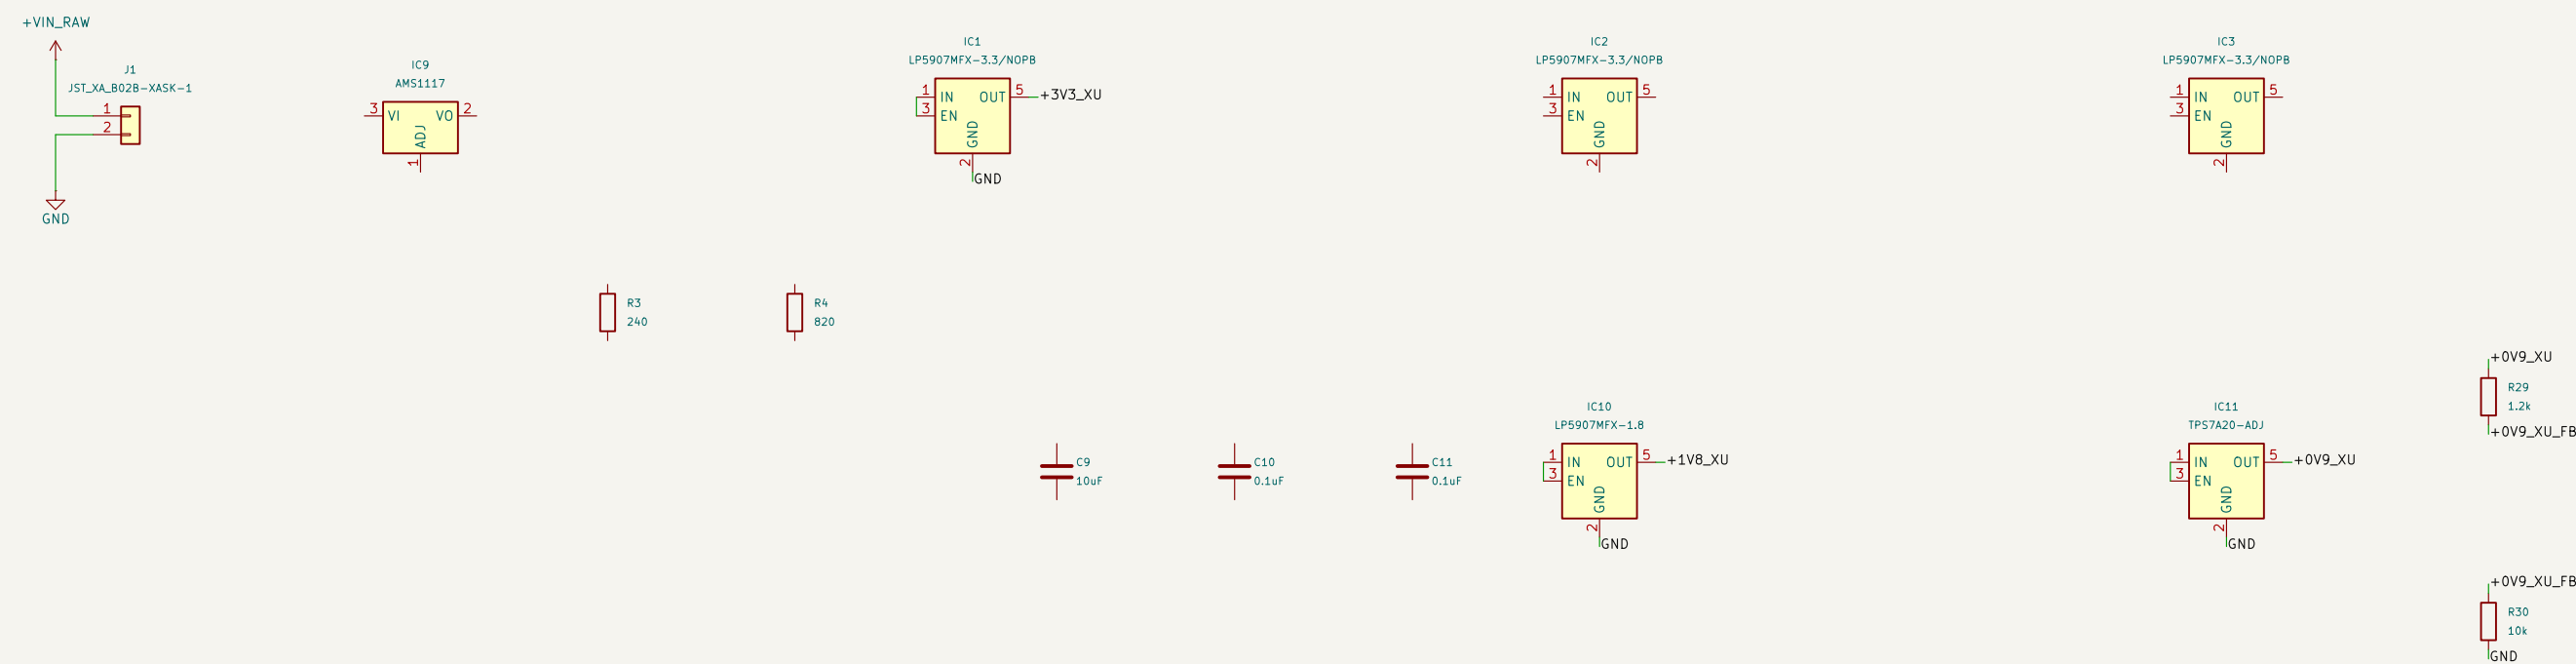

Existing unconnected pins are retained.

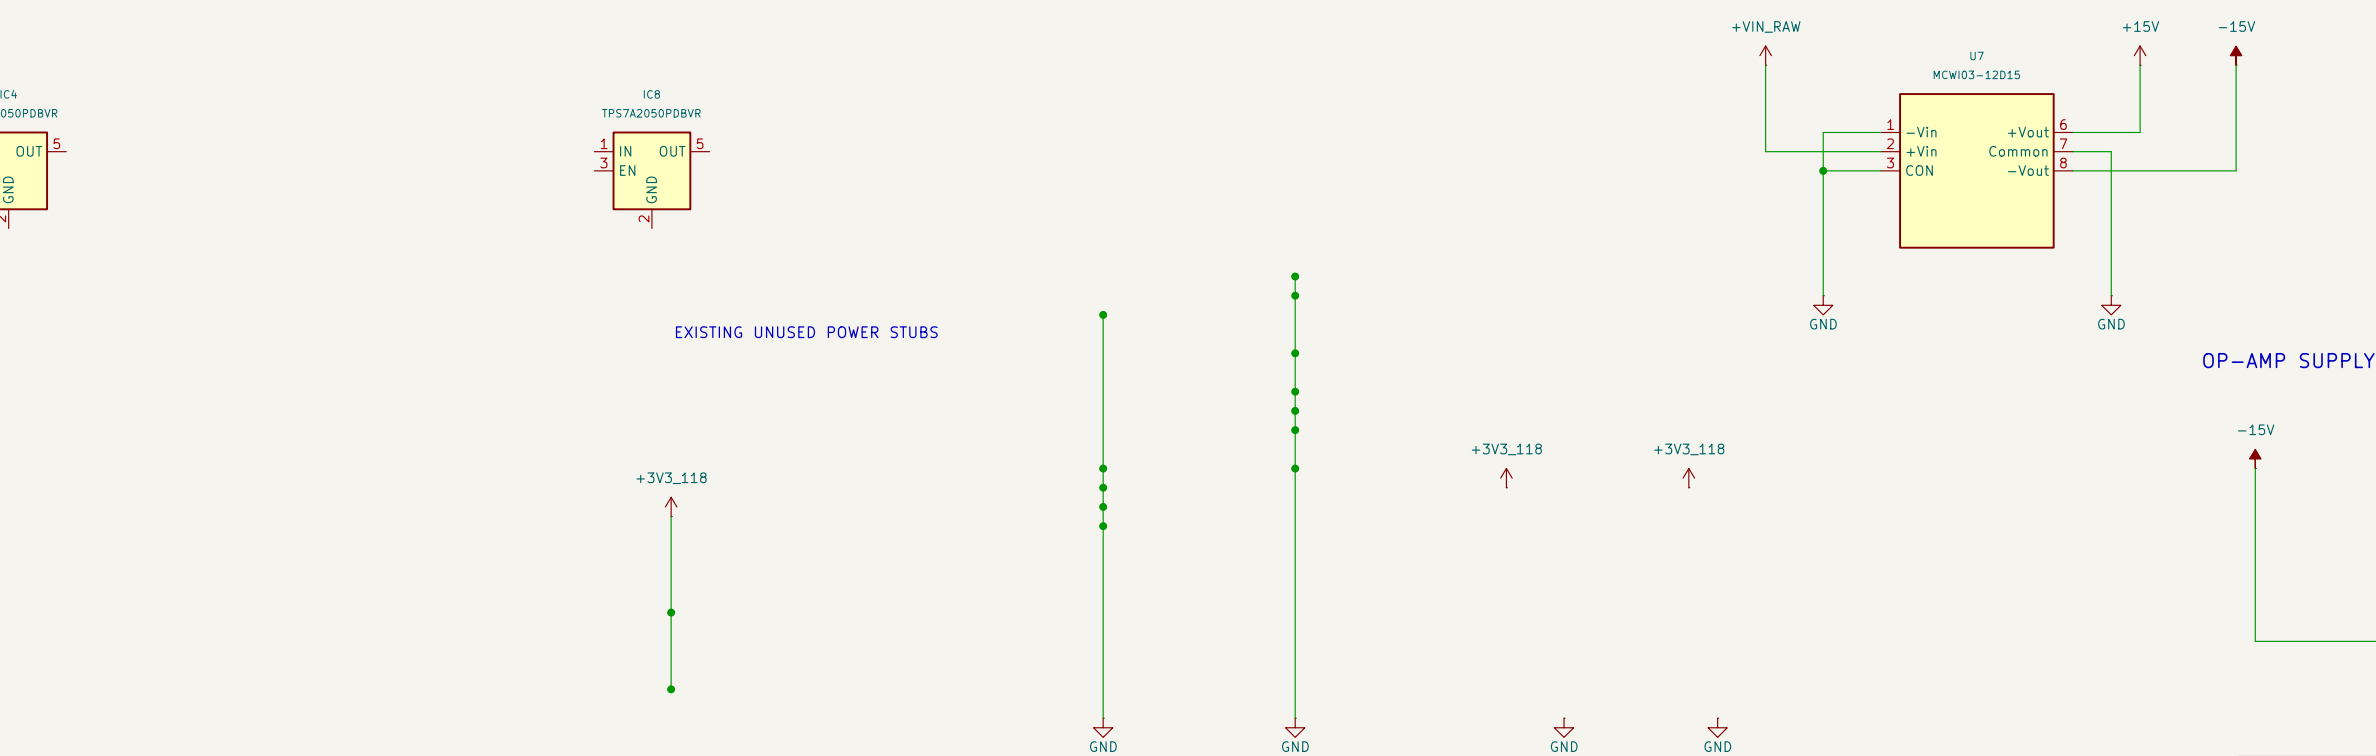

U3 / U4 reference duplicates exist in the source design.

Layout cleanup only. Existing incomplete connections retained.
USB-C > ISOUSB211 > XMOS XU316 > AK4490 > stereo line output

Sheet: /

Title: AK4490 USB DAC – functional layout

Size: User	Date:	Rev:
------------	-------	------

KilCad E.D.A. 10.0.3		Id: 1
15		16