




UPSTREAM USB-C (device/UFP) + ESD

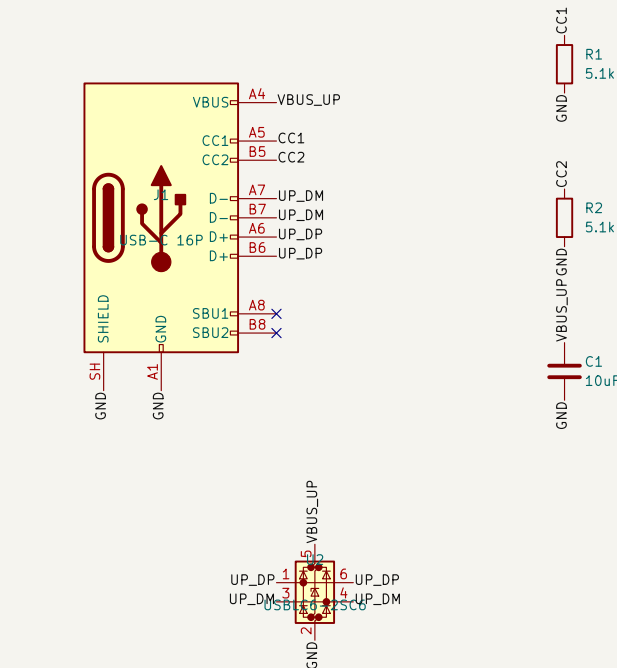

POWER: downstream rail +5V_PORT = VBUS_UP or EXT_5V (diode-OR)


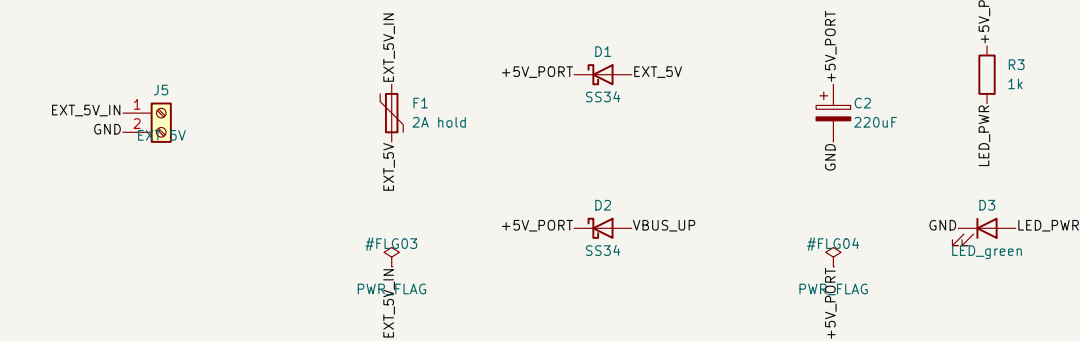


HUB: Terminus FE1.1s (SSOP-28, 0.635mm). No crystal load caps (internal).









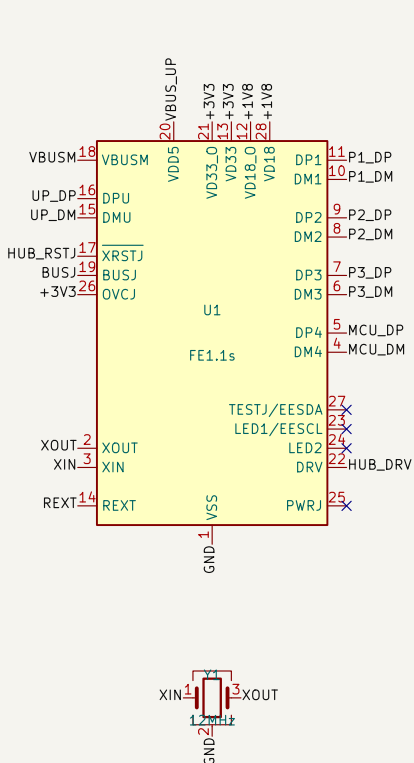


CONTROL: WCH CH552G on hub port 4, always powered from VBUS_UP.

Boot: hold SW1 while plugging in, or jump to bootloader from firmware.



DOWNSTREAM PORTS: SY6280AAC per port, L_LIM = 6800/R_SET (10k -> -0.68 A)

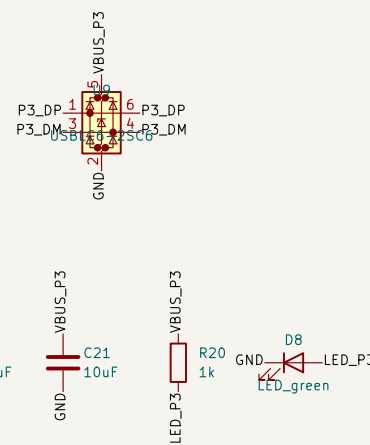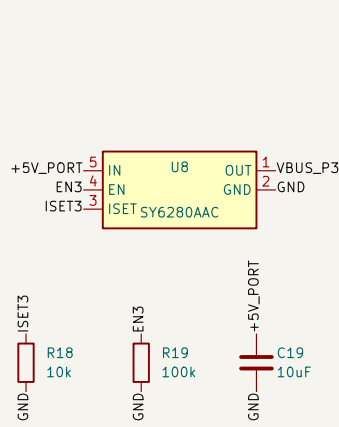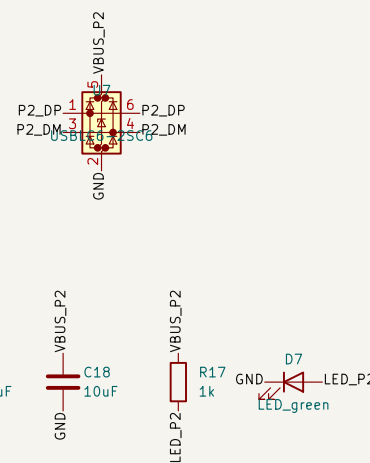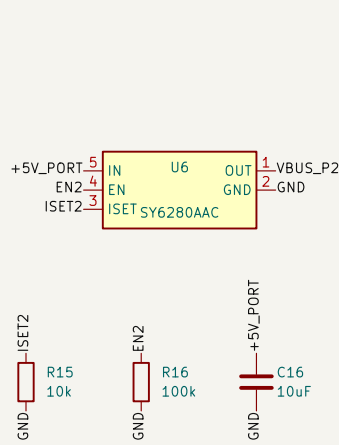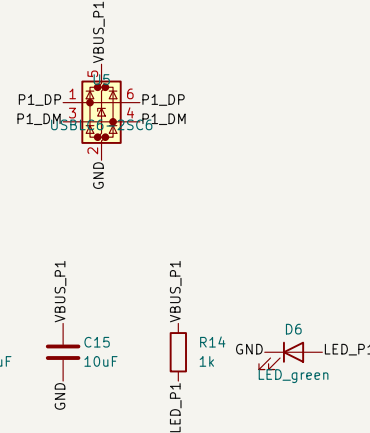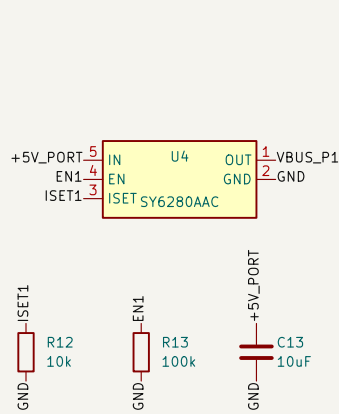

Generated by tools/make_schematic.py – edit the script, not this file