




Control USB

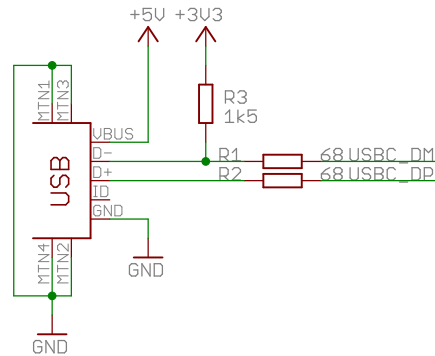


Supply

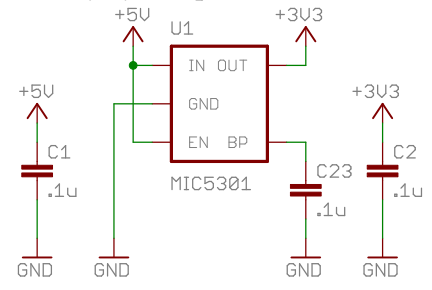


Microcontroller

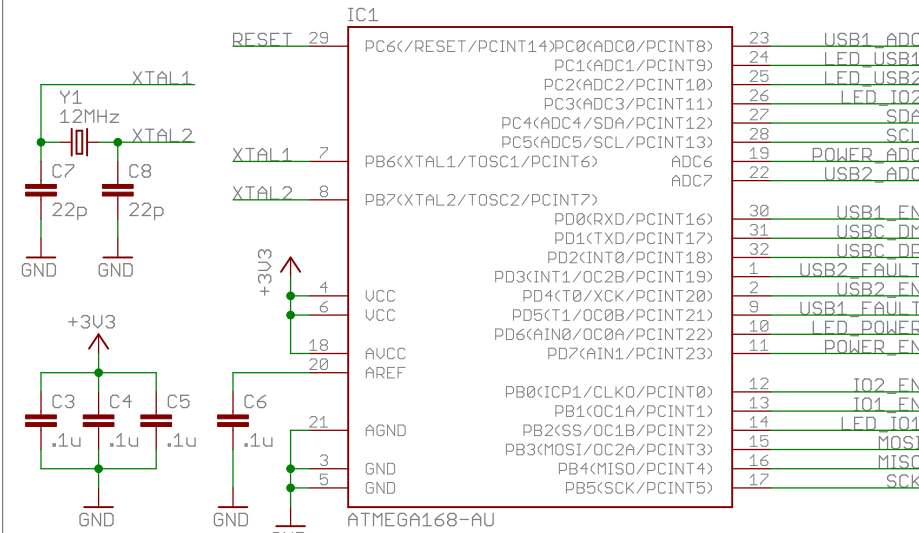

ISP

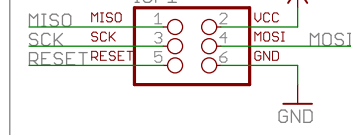


Input Measurement

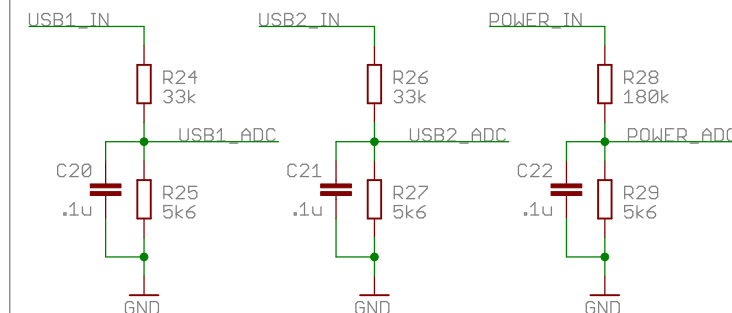


INA219

Ush range: +-320mV (/8), +-160mV (/4), +-80mV (/2) or +-40mV (/2)
Ubus range: 32V or 16V


USB-1

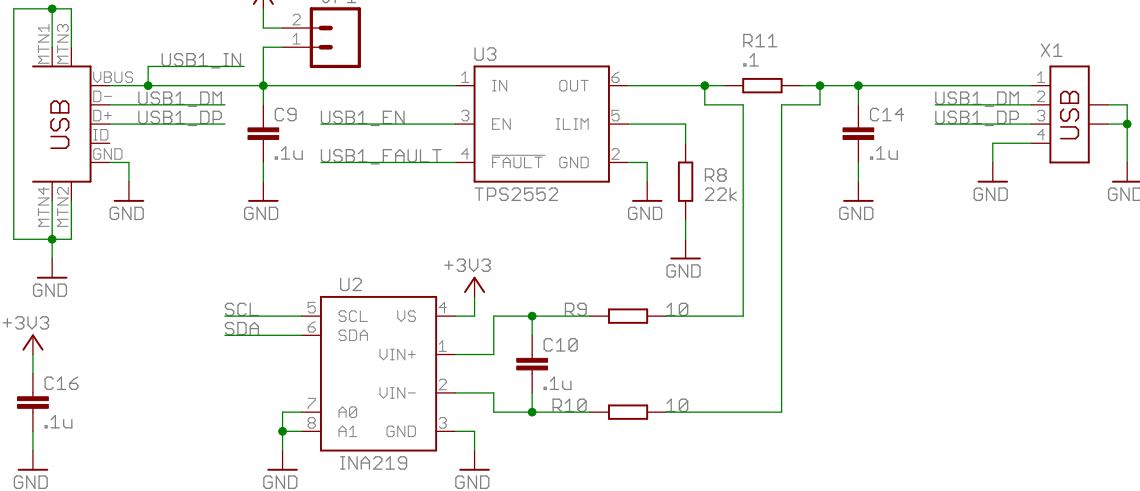


Power

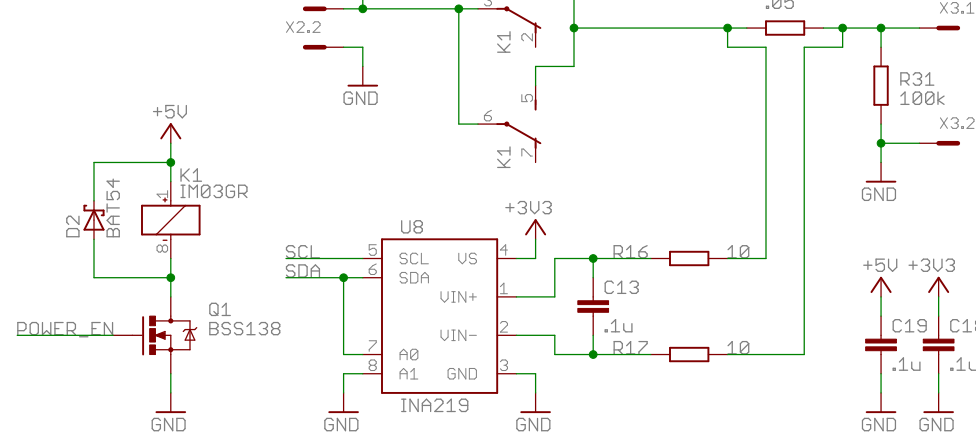


LEDs

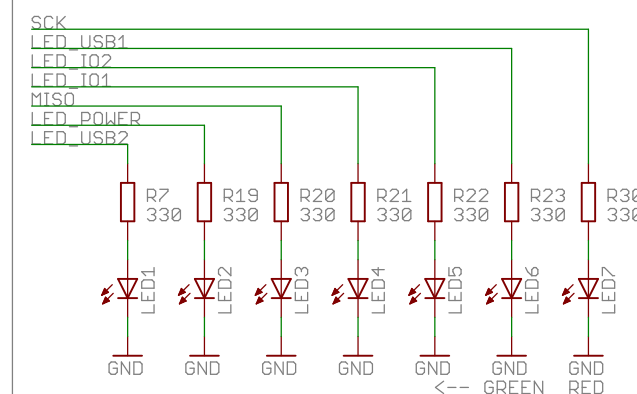


USB-2

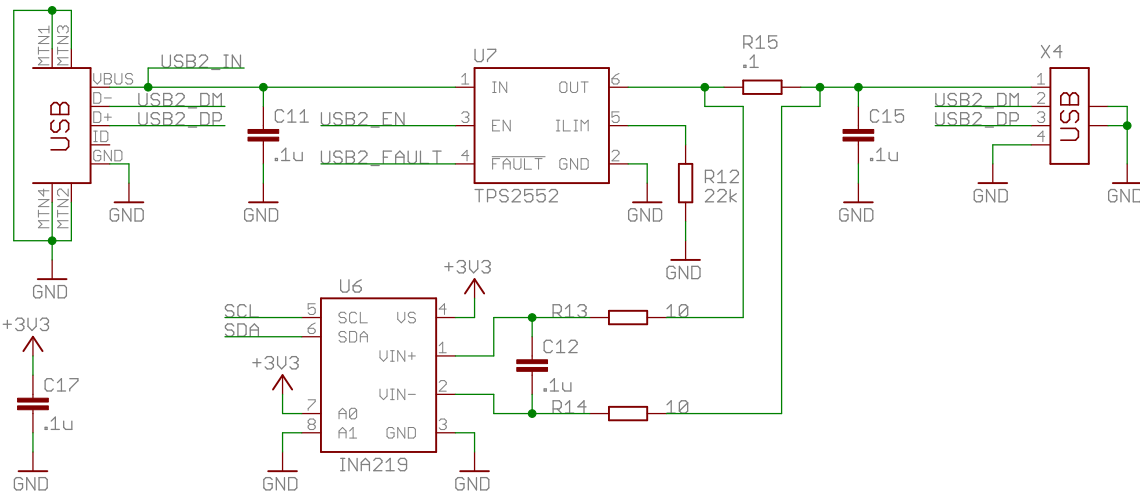


Relay 2

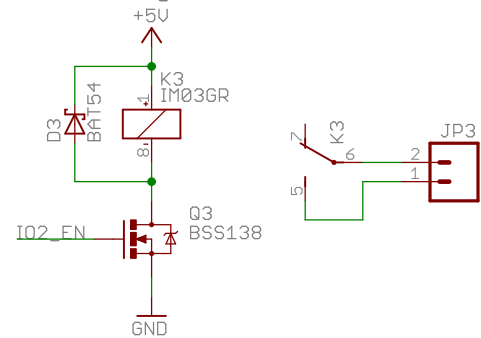

Relay 1

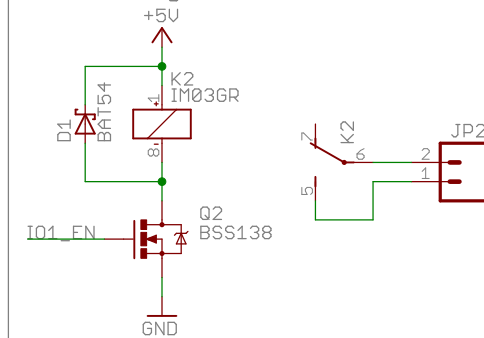

Pullups



Released under the Creative Commons
Attribution Share-Alike 3.0 License
<http://creativecommons.org/licenses/by-sa/3.0>
Design by: Fabio Baltieri

TITLE: power-manager

Document Number:

REV:

Date: 2/26/13 6:08 PM

Sheet: 1/1

